

# Exercises Astronomical Observing Techniques, Set 13

## Exercise 1

We want to observe a planet at a wavelength of  $2\mu\text{m}$  with the help of an AO system for a 8m telescope. The AO system is proposed to use a  $\text{mag}_V=16$  guide star. A Shack Hartmann wavefront sensor is used operating in the V-band (center =  $0.55\mu\text{m}$ , bandwidth  $0.089\mu\text{m}$ ). The wavefront sensor is read out at a speed of 100 Hz. The spectral irradiance (flux density) of a source with  $\text{mag}_V = 0$  is  $3.92 \times 10^{-8} \text{ W m}^{-2} \mu\text{m}^{-1}$ . The seeing is 1 arcsec in the V-band.

- Calculate the total number of photons received (per sec) from the star which can be used by the AO system. The QE for the AO wavefront sensor is 50%.
- Calculate the number of sub-apertures needed to correct for the effects of seeing at the wavelength used for detecting the planet.
- We assume that the star is detected by a single pixel in a sub-aperture. The CCD has a RON of  $10e^-$ . Calculate the SNR per aperture per integration time used in the AO system. (you can neglect other noise sources of the detector). Is this enough to do an AO correction?

## Exercise 2

- Explain why interferometry is especially useful for radio astronomy.
- Give three reasons why we rather use an interferometer with a 300m baseline than a single dish of 300m diameter.
- Why would you still prefer single dish if 15m is enough for your resolution requirements?

## Exercise 3

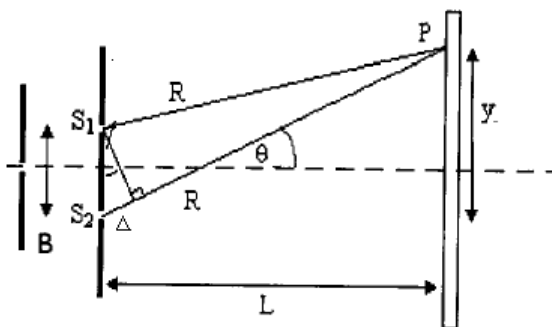


Figure 1:

In an optical interferometer, the beams are combined on top of each other, so that the fringes are formed similar like in a Young slit experiment (see Figure 1).

- Express the optical path difference  $\Delta$  in terms of the distances  $B$ ,  $y$  and  $L$ . The angle  $\theta$  can

assumed to be small.

b) Last week we derived the intensity of two interfering beams of equal amplitude to be equal to  $2I_0(1+\cos\delta)$ . Rewrite this to a single quadratic term by using  $\cos(a\pm b) = \cos a \cos b \mp \sin a \sin b$ .

c) At which positions  $y_m$  is constructive interference? What is the minimum pixel size in order to detect fringes?