


# Astronomische Waarneemtechnieken (Astronomical Observing Techniques)

3<sup>rd</sup> Lecture: 28 September 2011

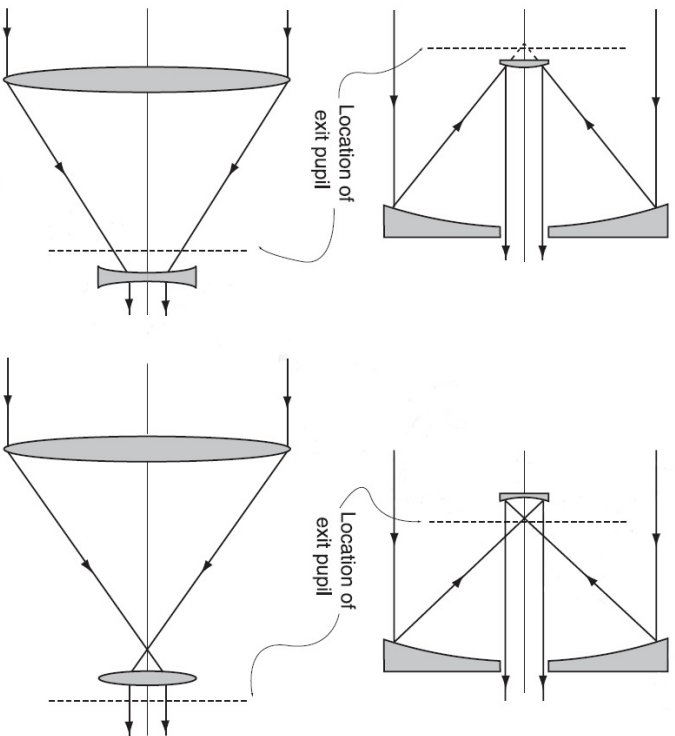

1. History
2. Mounts
3. Orbits
4. Basic Optics
5. Foci
6. Mass, Size, ...
7. Non-optical Tel.

## 1. History of Telescopes

- Hans Lipperhey 1608 – first patent for “spy glasses”



- Galileo Galilei 1609 – first use in astronomy




- Newton 1668 – first refractor



- Kepler – improves reflector

- Herschel 1789 – 4 ft refractor

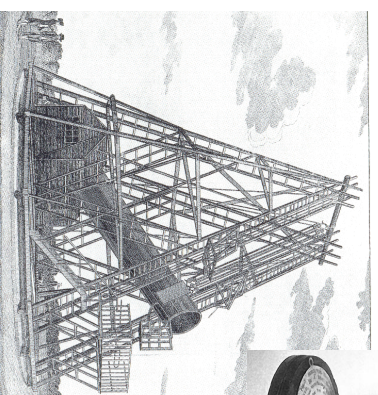


- ...

## 2. Ground-based Telescopes: Mounts


Two main types:

1. Equatorial mounting
2. Azimuthal mounting

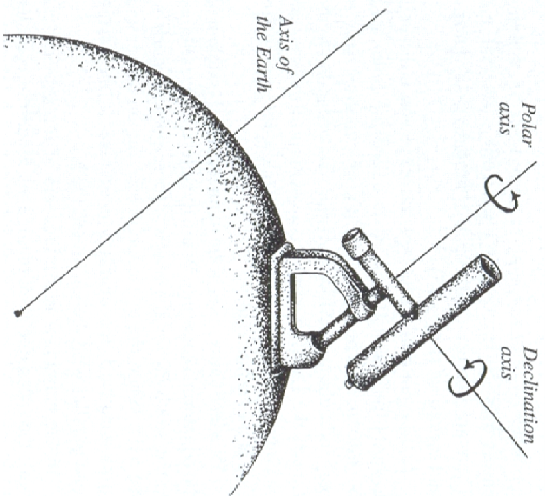

Equatorial:

- + follows the Earth rotation
- typically much larger and massive

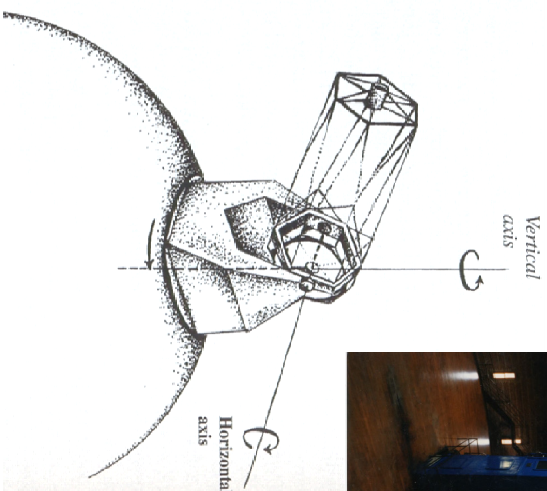

Azimuthal:

- + light and symmetric
- requires computer control




## Telescope Mounts (2)

Variations of equatorial (or parallactic) mounts:

- German mount

- English mount

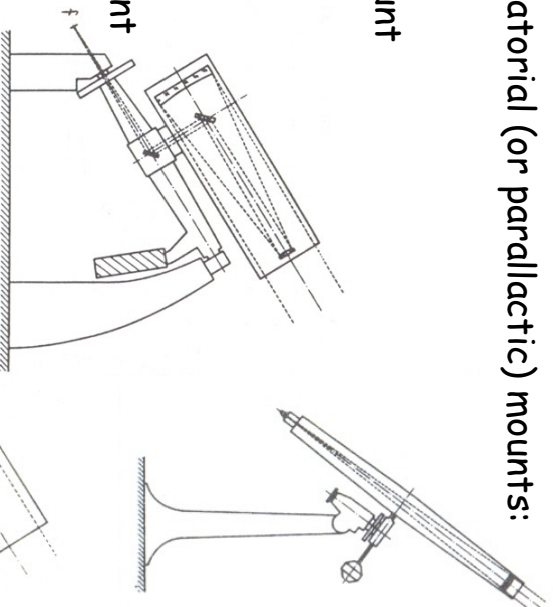


- Fork mount



# 3. Space Telescopes: Orbits

Choice of Orbits:


- communications
- thermal background radiation
- space weather
- sky coverage
- access (servicing)

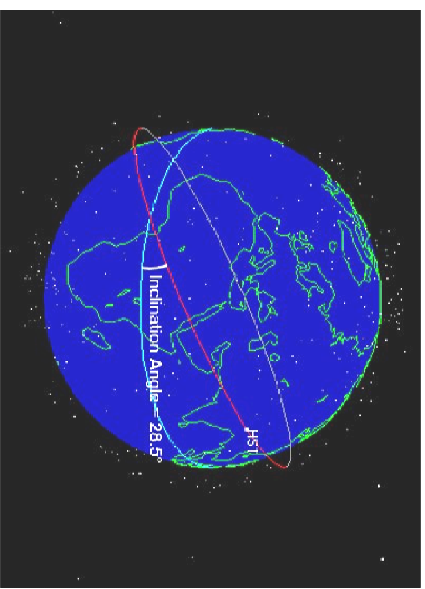

*Two Examples:*

HST : low Earth orbit ~96 minutes


Spitzer: Earth-trailing solar orbit ~60 yr

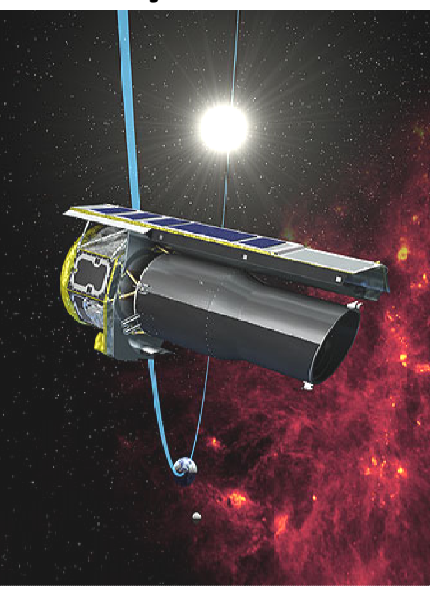

## The L2 Orbit

*Joseph-Louis Lagrange (18<sup>th</sup> century mathematician) :*  
search for a stable configuration in which three bodies could orbit each other yet stay in the same position relative to each other  
→ five solutions, the **five Lagrange points**.

An object placed at any one of these 5 points will stay in place relative to the other two.

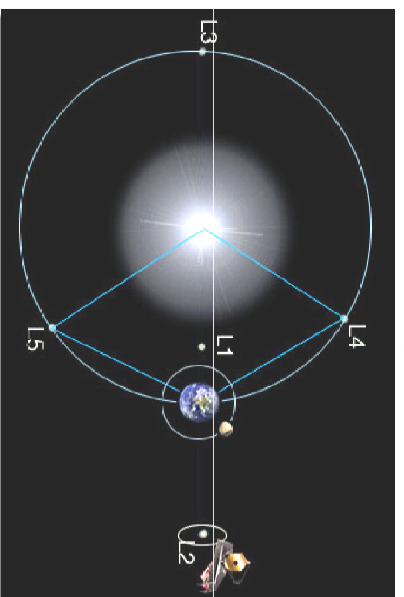


E.g., JWST and Herschel are in orbits around the L2 point → orbit with Earth




# 4. Basic Telescope Optics

## Image Scale and Magnification

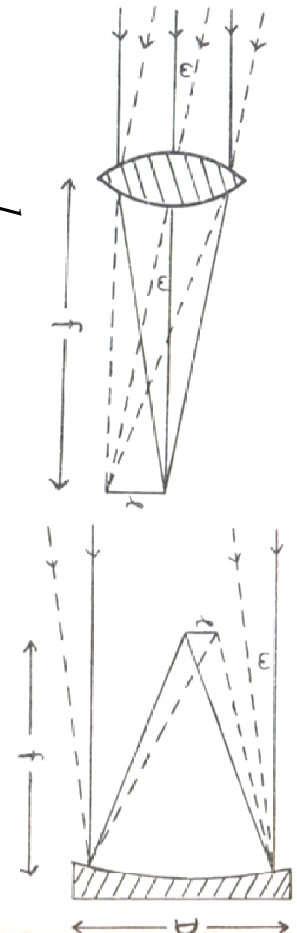

Scale:  $\tan \omega = \frac{l}{f}$  and for small  $\omega$ :  $l \approx 0.0175 \omega f$

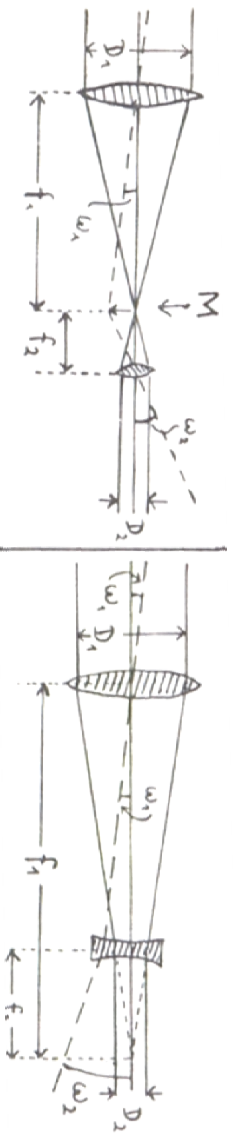

Magnification:  $V = \frac{f_1}{f_2} = \frac{D_1}{D_2} = \frac{\omega_2}{\omega_1}$


## The Field of View

Geometrically:  $\tan \omega_{\max} = \left( \frac{D}{f} \right)_{\text{Camera}}$

Practically, the FOV is limited by aberrations:



The bigger the mirror the bigger the difference [parabola - sphere] near the edge → bigger telescopes have smaller FOVs (~<1 deg).

Parabolic primary:

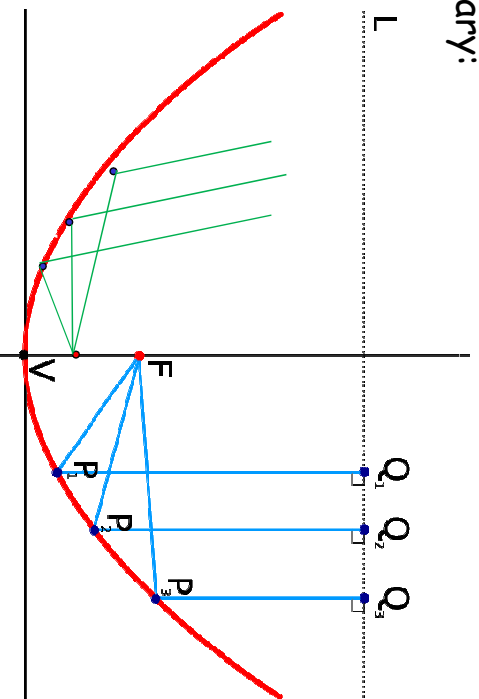


# The Schmidt Telescope

The Schmidt telescope uses a **spherical primary mirror** to get the **maximum field of view** (>5 deg)  
 → no off-axis asymmetry but spherical aberrations:

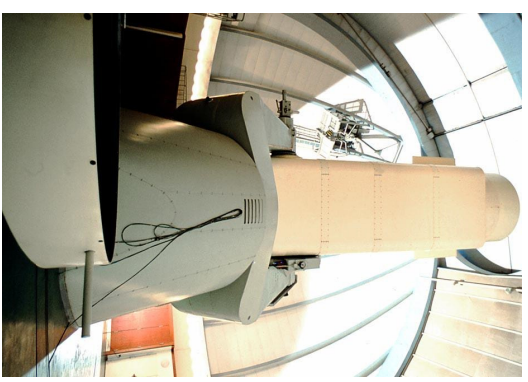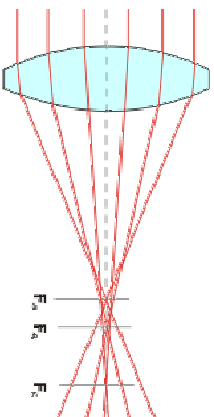

Two meter Alfred-Jensch-Telescope in Tautenburg, the largest Schmidt camera in the world.

→ Schmidt telescopes require a **corrector lens**.

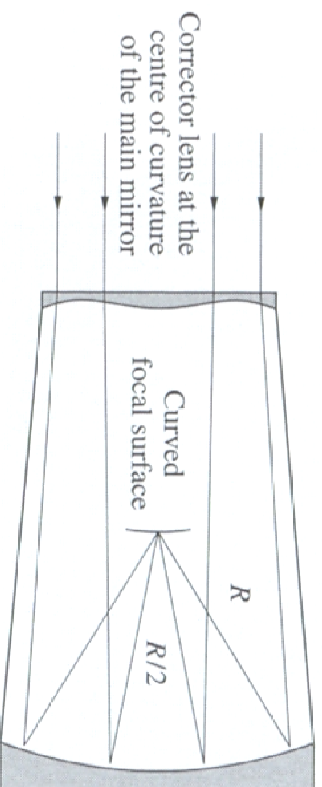


## Light Gathering Power and Resolution

Light gathering power

For extended objects:  $S/N \propto \left(\frac{D}{f}\right)^2$  (see lecture on S/N)

For point sources:  $S/N \propto D^2$

Angular resolution  $\sin \Theta = 1.22 \frac{\lambda}{D}$  or  $\Delta l = 1.22 \frac{f\lambda}{D}$   
 (given by the Rayleigh criterion)

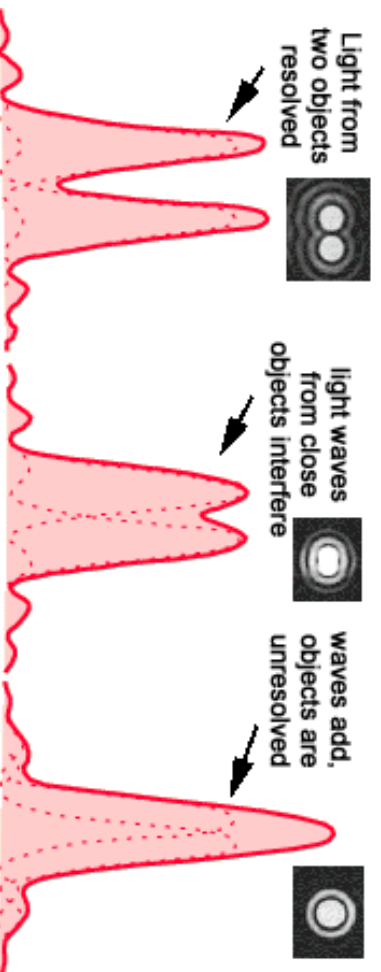

# Parameters of a Ritchey-Chrétien Configuration


RC telescopes use **two hyperbolic**  $\frac{x^2}{a^2} - \frac{y^2}{b^2} = 1$  mirrors, instead of a parabolic  $y - ax^2 = 0$  mirror.

## Optical parameters

- Primary mirror diameter
- Primary mirror  $f$ -ratio
- Primary mirror focal length
- Backfocal distance
- Normalized back focal distance
- Magnification of secondary mirror
- Primary-secondary separation
- Secondary mirror focal length
- Primary mirror conic constant
- Secondary mirror conic constant
- Secondary mirror dia. (zero field)
- Obscuration ratio (no baffling)
- Final  $f$ -ratio
- Final focal length
- Field radius of curvature

## Aberrations

- Angular astigmatism
- Angular distortion
- Median field curvature

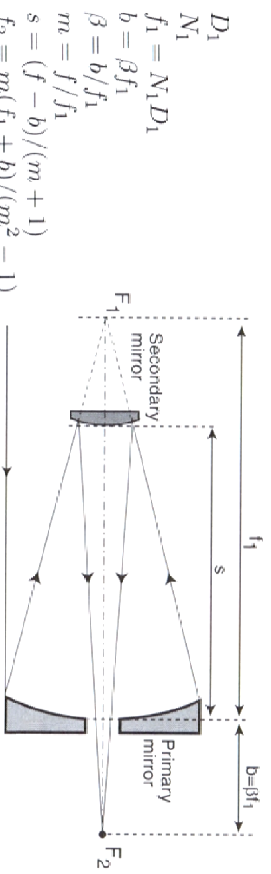

$$D_1$$

$$N_1$$

$$f_1 = N_1 D_1$$

$$b = \beta f_1$$

$$\beta = b/f_1$$

$$m = f/f_1$$

$$s = (f - b)/(m + 1)$$

$$f_2 = m(f_1 + b)/(m^2 - 1)$$

$$k_1 = -1 - \frac{2(1+\beta)}{m^2(m-\beta)}$$

$$k_2 = -\left(\frac{m+1}{m-1}\right)^2 - \frac{2m(m+1)}{(m-\beta)/(m-1)^3}$$

$$D_2 = D_1(f_1 + b)/(f + f_1)$$

$$D_2/D_1$$

$$N$$

$$f = N D_1 = \frac{f_1 f_2}{f_1 + f_2 - s}$$

$$\frac{f_1 f_2 (f_1 - s)}{f_1^2 + s(f_2 - f_1^2)}$$


$$\frac{\theta^2}{2F} \frac{m(2m+1)+\beta}{2m(1+\beta)}$$

$$\theta^3 \frac{(m-\beta)}{4m^2(1+\beta)^2} (m(m^2 - 2) + \beta(3m^2 - 2))$$




$$\frac{2}{(m+1)} \frac{1}{R_1} \frac{1}{m^2(1+\beta)} (m^2 - \beta(m-1))$$

# 5. Telescope Foci

a) Mersenne reflecting afocal Cassegrain form

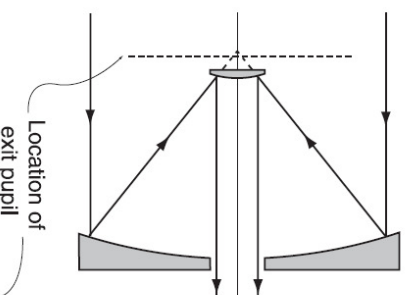



b) Mersenne reflecting afocal Gregory form

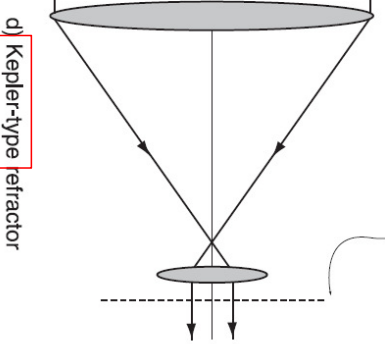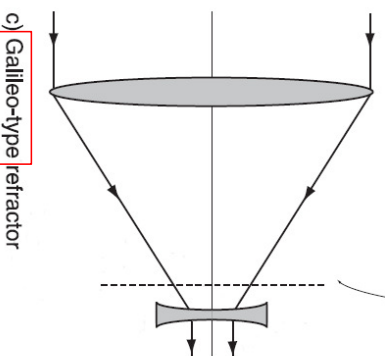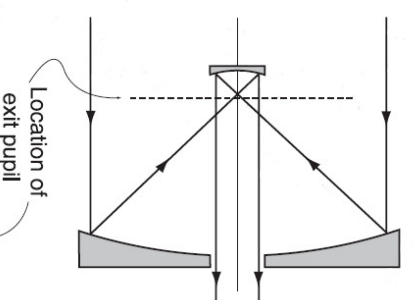


## 2 fundamental choices:

- Refractor  $\Leftrightarrow$  Reflector
- Location of exit pupil

# Telescope Foci - where to put the instruments

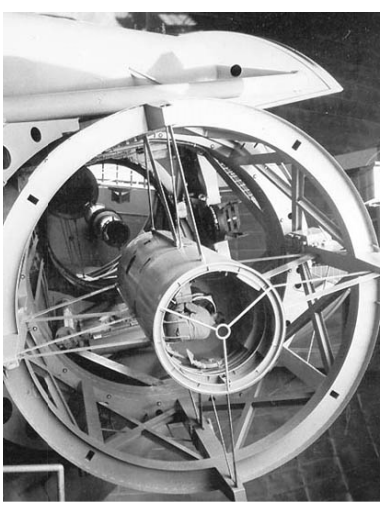
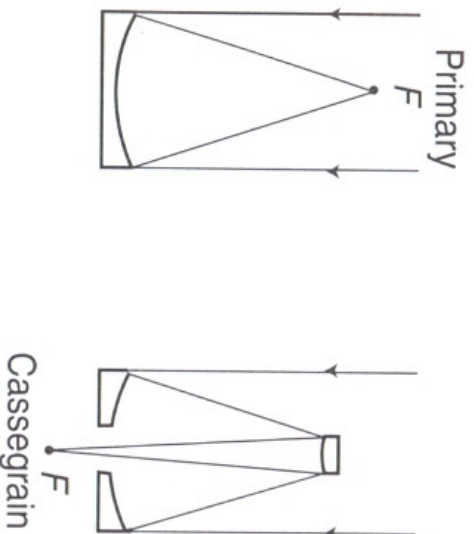


**Prime focus** - wide field, fast beam but difficult to access and not suitable for heavy instruments

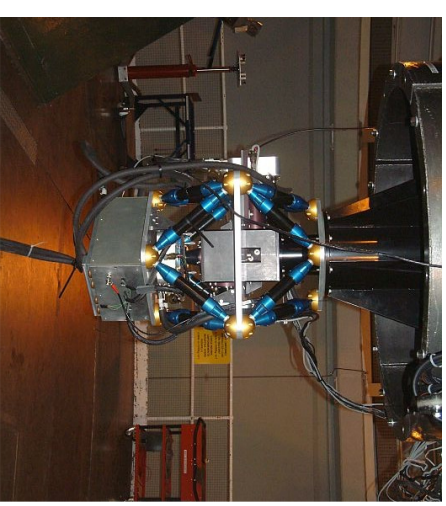

**Cassegrain focus** - moves with the telescope, no image rotation, but flexure may be a problem

# Telescope Foci - where to put instruments (2)

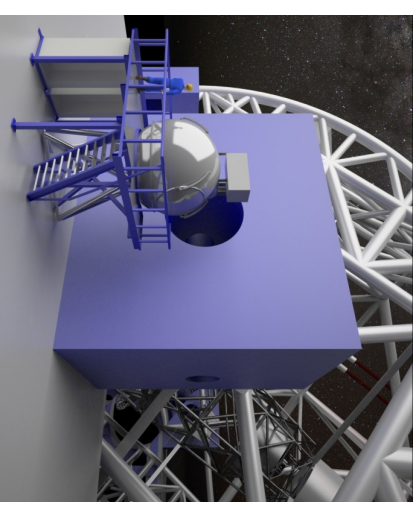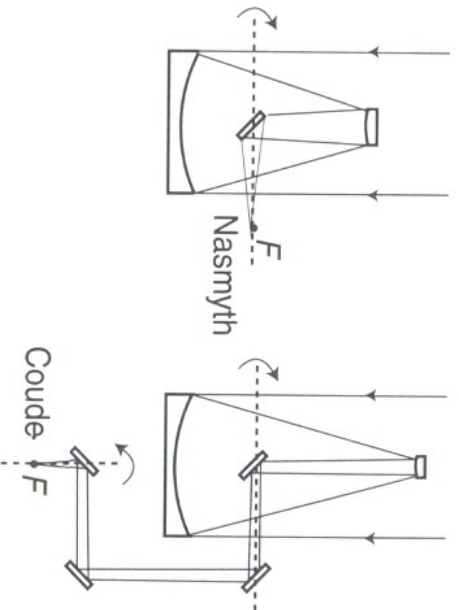

**Nasmyth** - ideal for heavy instruments to put on a stable platform, but field rotates

**Coude** - very slow beam, usually for large spectrographs in the "basement"


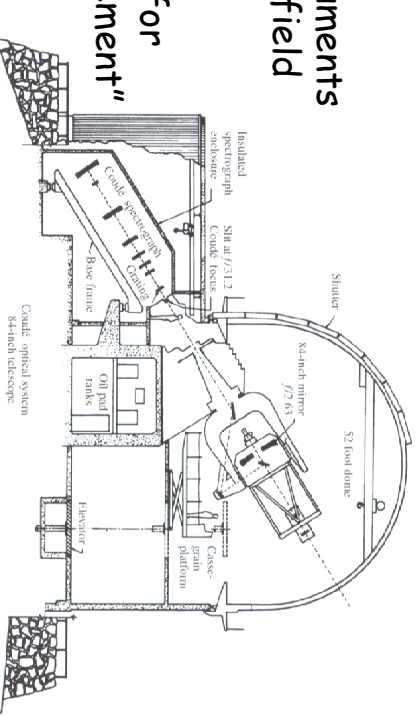




Fig. A13. The coude system of the Kitt Peak 2.1 m reflector. (Drawing National Optical Astronomy Observatories, Kitt Peak National Observatory)

# 6. Mass, Size, etc.

## The Growth of Telescope Collecting Area


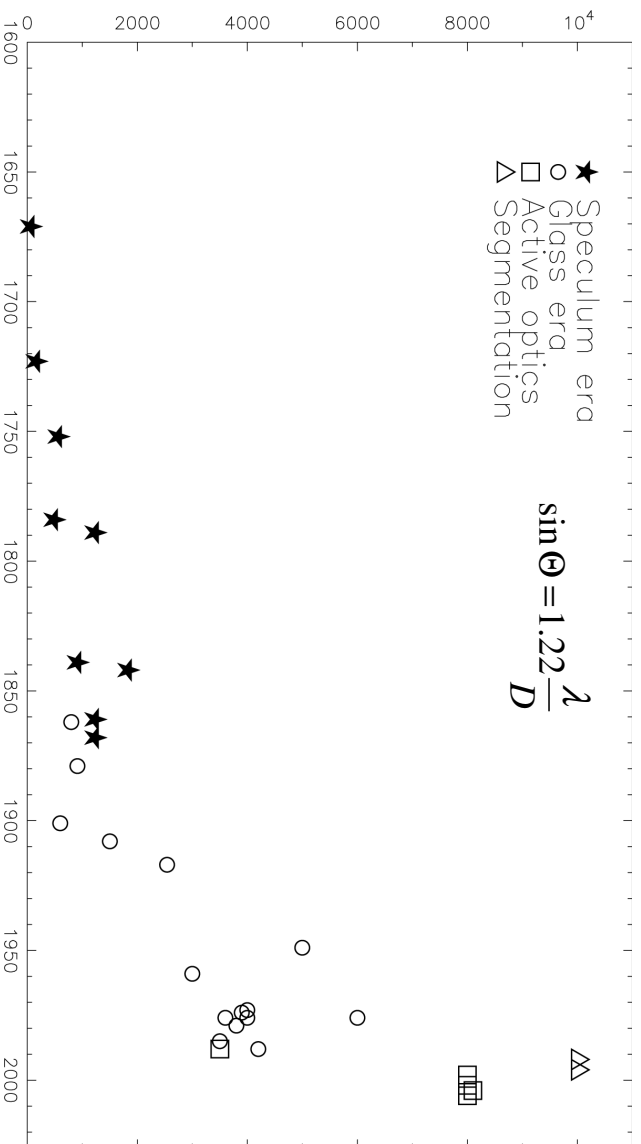


## Mass Limitations

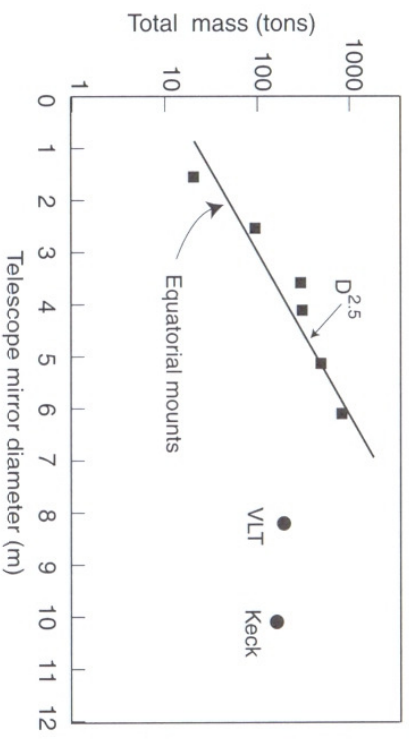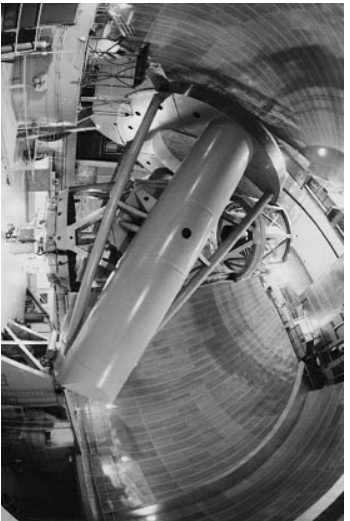

Most **important innovations**:

1. **faster mirrors** → smaller telescopes → smaller domes
2. **faster mirrors** ← **new polishing techniques** → smaller domes
3. **bigger mirrors** ← **thinner / segmented mirrors** ← **active support**

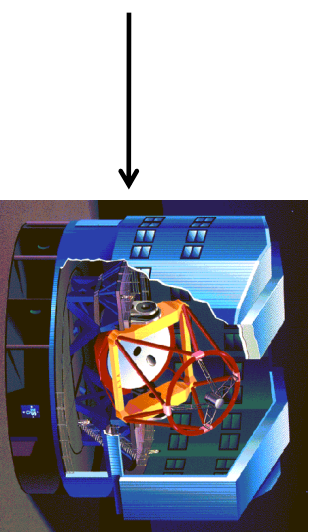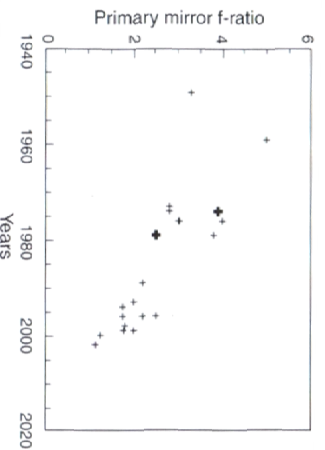



# Polishing Techniques

## Stressed mirror polishing. 1: A technique for producing nonaxisymmetric mirrors


Jacob Lubliner and Jerry E. Nelson (OSA, 1980)

The theoretical basis is developed for a technique to fabricate nonaxisymmetric mirrors. Stresses are applied to a mirror blank that would have the effect of elastically deforming a desired surface into a sphere. A sphere is then polished into the blank, and upon release of the applied stress, the spherical surface deforms into the desired one. The method can be applied iteratively, so arbitrary accuracy should be possible. Calculations of the stresses and deformations are carried out in detail for an off-axis section of a paraboloid. For a very general class of surfaces, it is sufficient to only impose appropriate stresses at the edge of the blank plus a uniform pressure on the back.




Polishing a 6.5-m mirror on the Large Optical Generator (LOG) using the stressed-lap polishing tool. The lap changes shape dynamically as it moves radially from center-to-edge of the mirror to produce a paraboloid. Our 6.5-m mirrors are typically figured to a focal ratio of  $f/1.25$  with a finished precision of  $\pm 15$ - $20$  nanometers.  
<http://mirrorlab.as.arizona.edu/TECH.php?navi=poli>

## Segmented, Thin and Honeycomb Mirrors

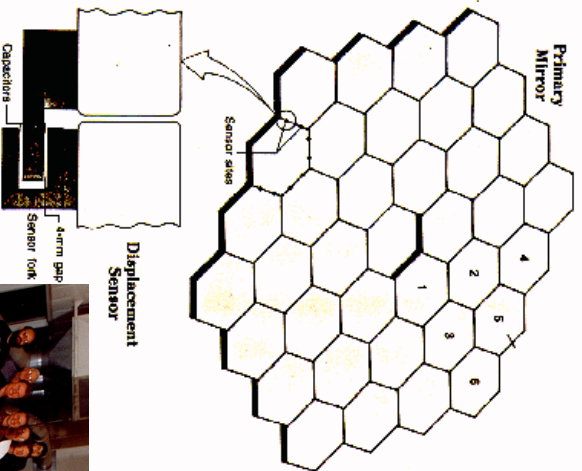

## Active Optics (Mirror Support)



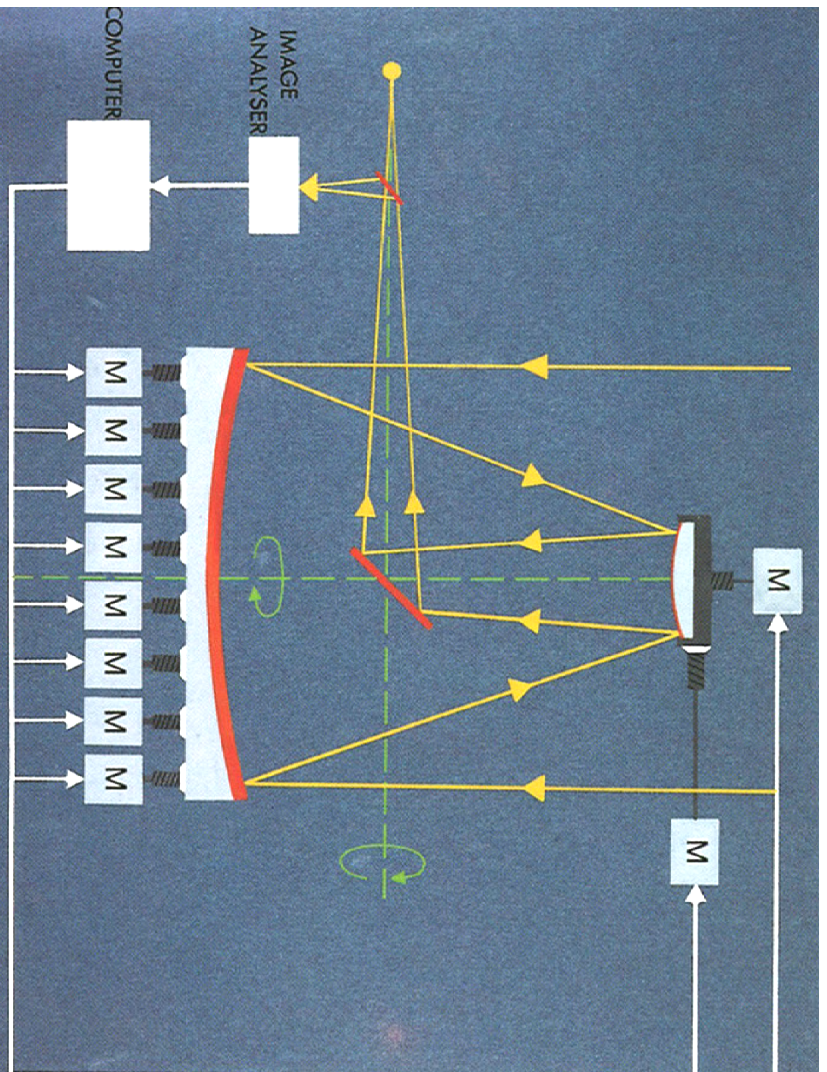


## Optical Telescopes in Comparison

	Palomar	Keck	JWST
Telescope aperture	5 m	10 m	6.5 m
Telescope mass	600 +	300 +	6.5 +
# of segments	1	36	18
Segment size	5 m	1.8 m	1.3 m
Mass / segment	14.5 +	400 kg	20 kg


# Liquid Mirror Telescopes

- First suggestion by Ernesto Capocci in 1850
- First **mercury** telescope built in 1872 with a diameter of 350 mm
- Largest mirror: diameter 3.7 m

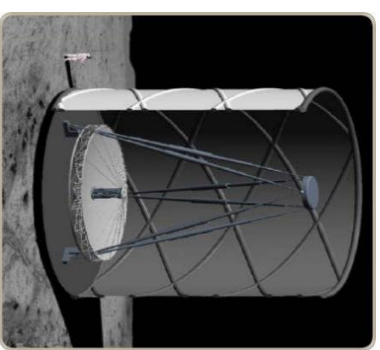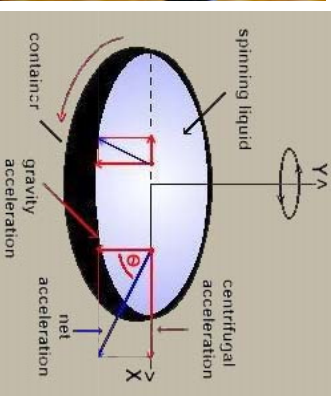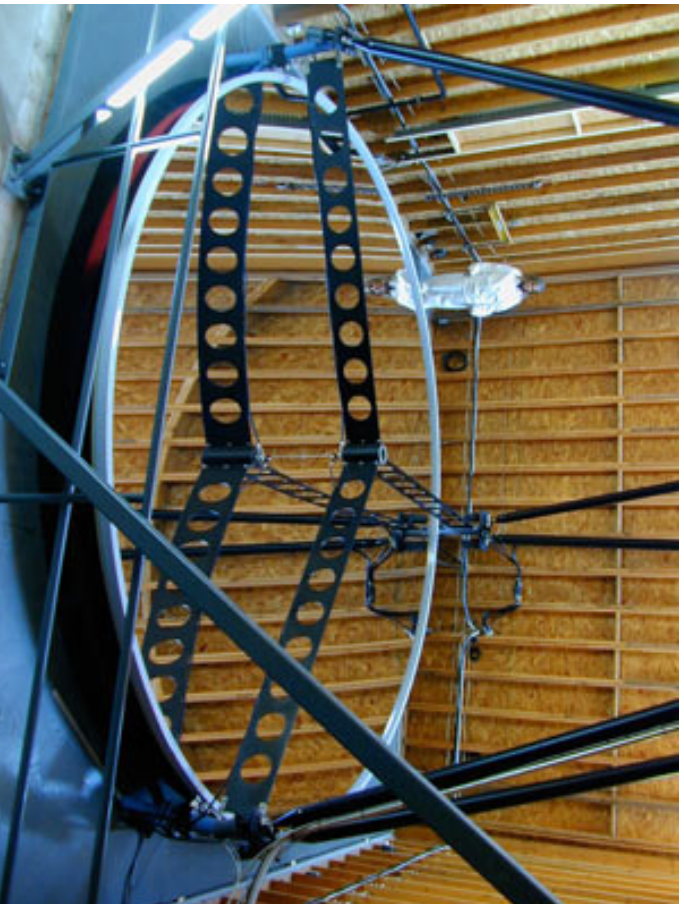

## 7. "Non-Optical" Telescopes

Dishes similar to optical telescopes but with much lower surface accuracy

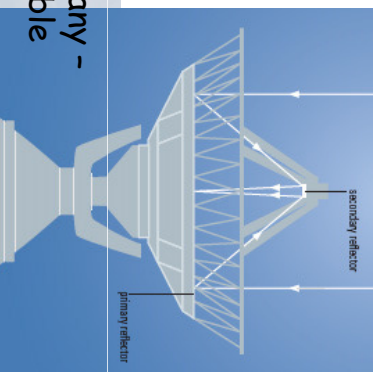

Effelsberg, Germany - 100m fully steerable telescope

Arecibo, Puerto Rico - the largest (305m) single-aperture telescope



Greenbank, USA - after structural collapse (now rebuilt)

# Arrays and Interferometers

VLA in New Mexico - 27 antennae (each 25m) in a Y-shape (up to 36 km baseline)



WSRT (Westerbork) in Drenthe - 14 antennae along 2.7 km line



ALMA in Chile - 50 dishes (12m each) at 5000m altitude  
400 $\mu$ m - 3mm (7.20 GHz - 84GHz)



## LOFAR in the Netherlands

The Low Frequency ARray uses two types of low-cost antennas:


- Low Band Antenna (10-90 MHz)
- High Band Antenna (110-250 MHz).

Antennae are organized in 36 stations over ~100 km. Each station contains 96 LBAs and 48 HBAs

Baselines: 100m - 1500km

Main LOFAR subsystems:

- sensor fields
- wide area networks
- central processing systems
- user interfaces



# X-ray Telescopes

- X-rays impinging perpendicular on any material are largely absorbed rather than reflected.
- → telescope optics is based on **glancing angle reflection** (rather than refraction or large angle reflection)
- typical reflecting materials for X-ray mirrors are **gold and iridium** (gold has a critical reflection angle of 3.7 deg at 1 keV).

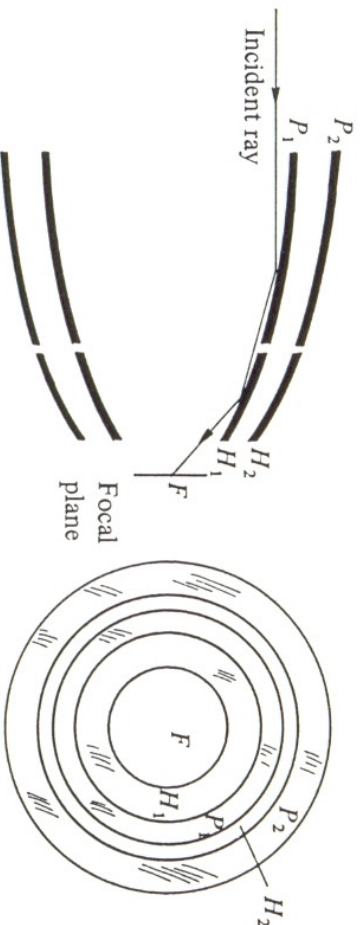


Fig. 4.33. Side and front views of a Wolter X-ray telescope.  $P$  and  $H$  denote parabolic and hyperbolic surfaces of revolution, whose common axis points to the source

