# Lecture 4: Polarization

## Content

# Polarized Light in the Universe

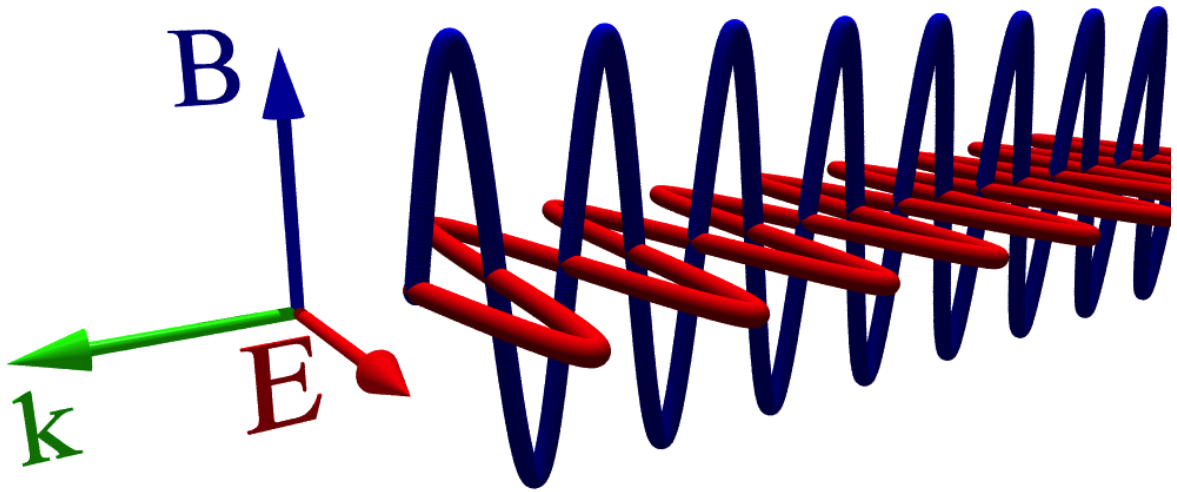


*Polarization* indicates *anisotropy* $\Rightarrow$ not all directions are equal

Typical anisotropies introduced by

- geometry (not everything is spherically symmetric)
- temperature gradients
- density gradients
- magnetic fields
- electrical fields

## 13.7 billion year old temperature fluctuations from WMAP

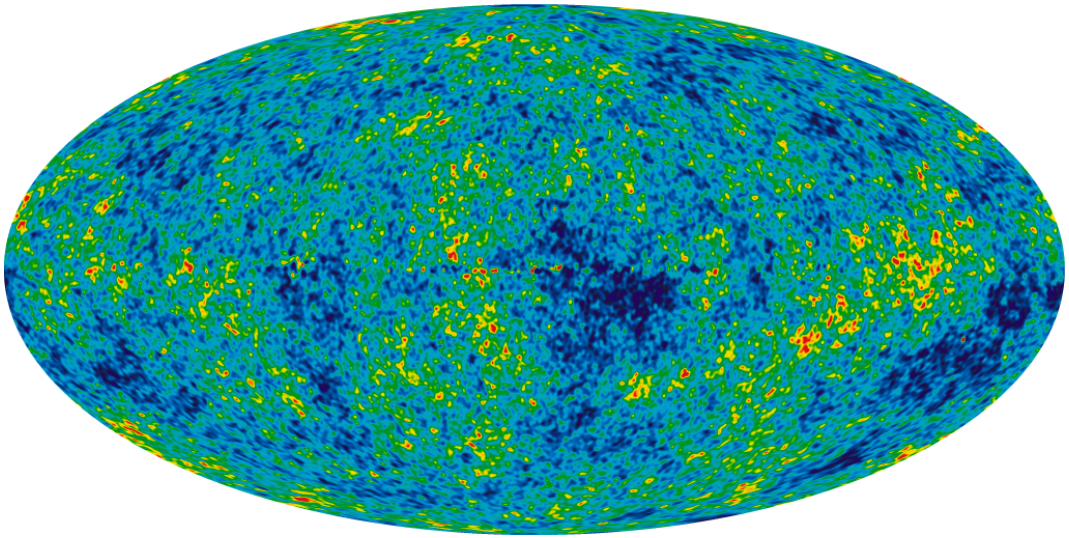

## BICEP2 results and Planck Dust Polarization Map

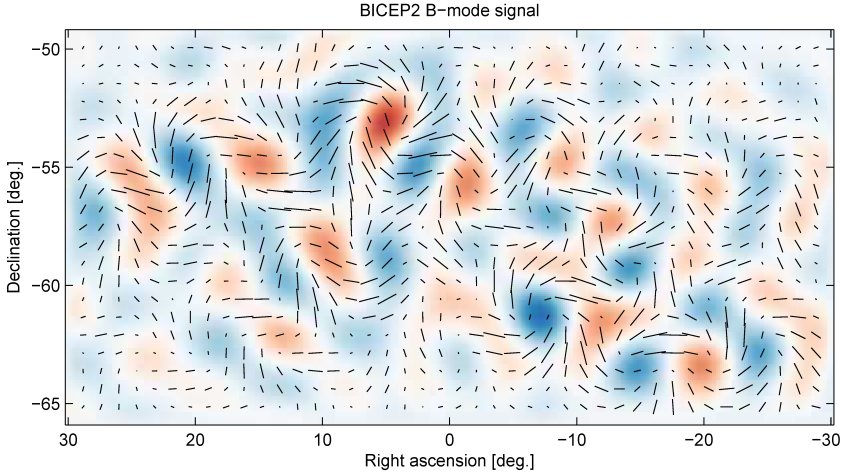


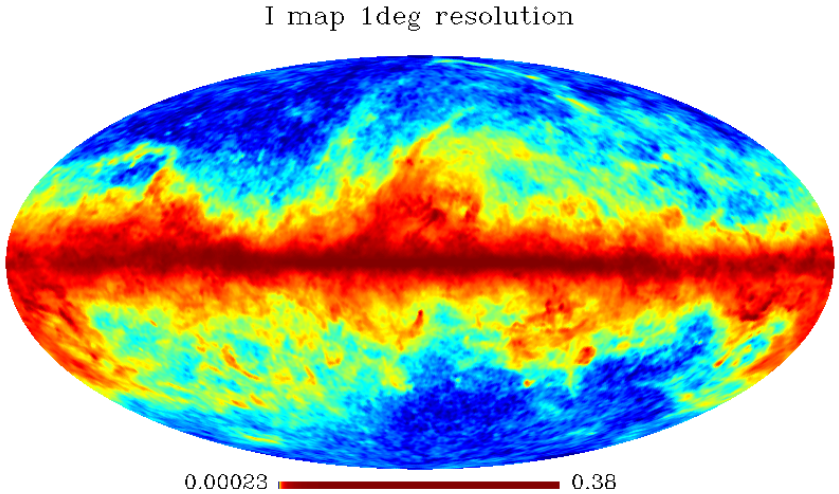

# Scattering Polarization 1

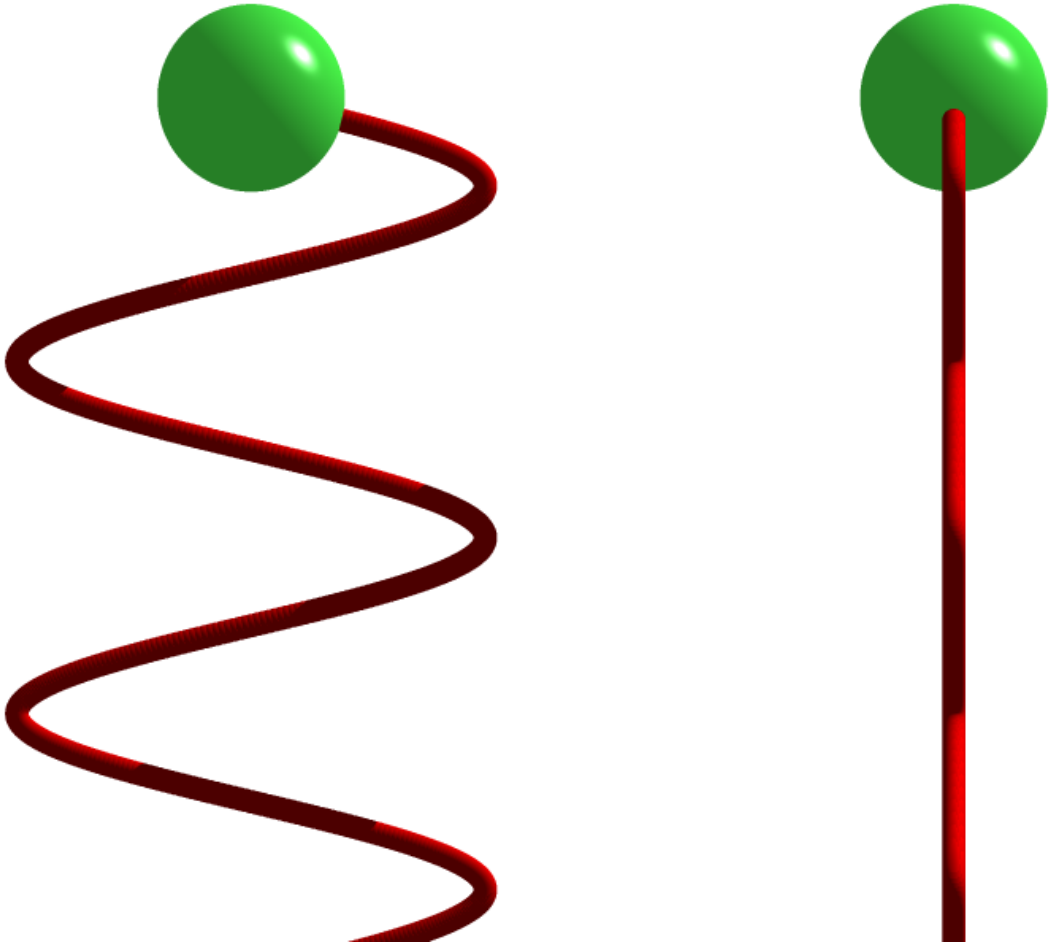

# Scattering Polarization 2

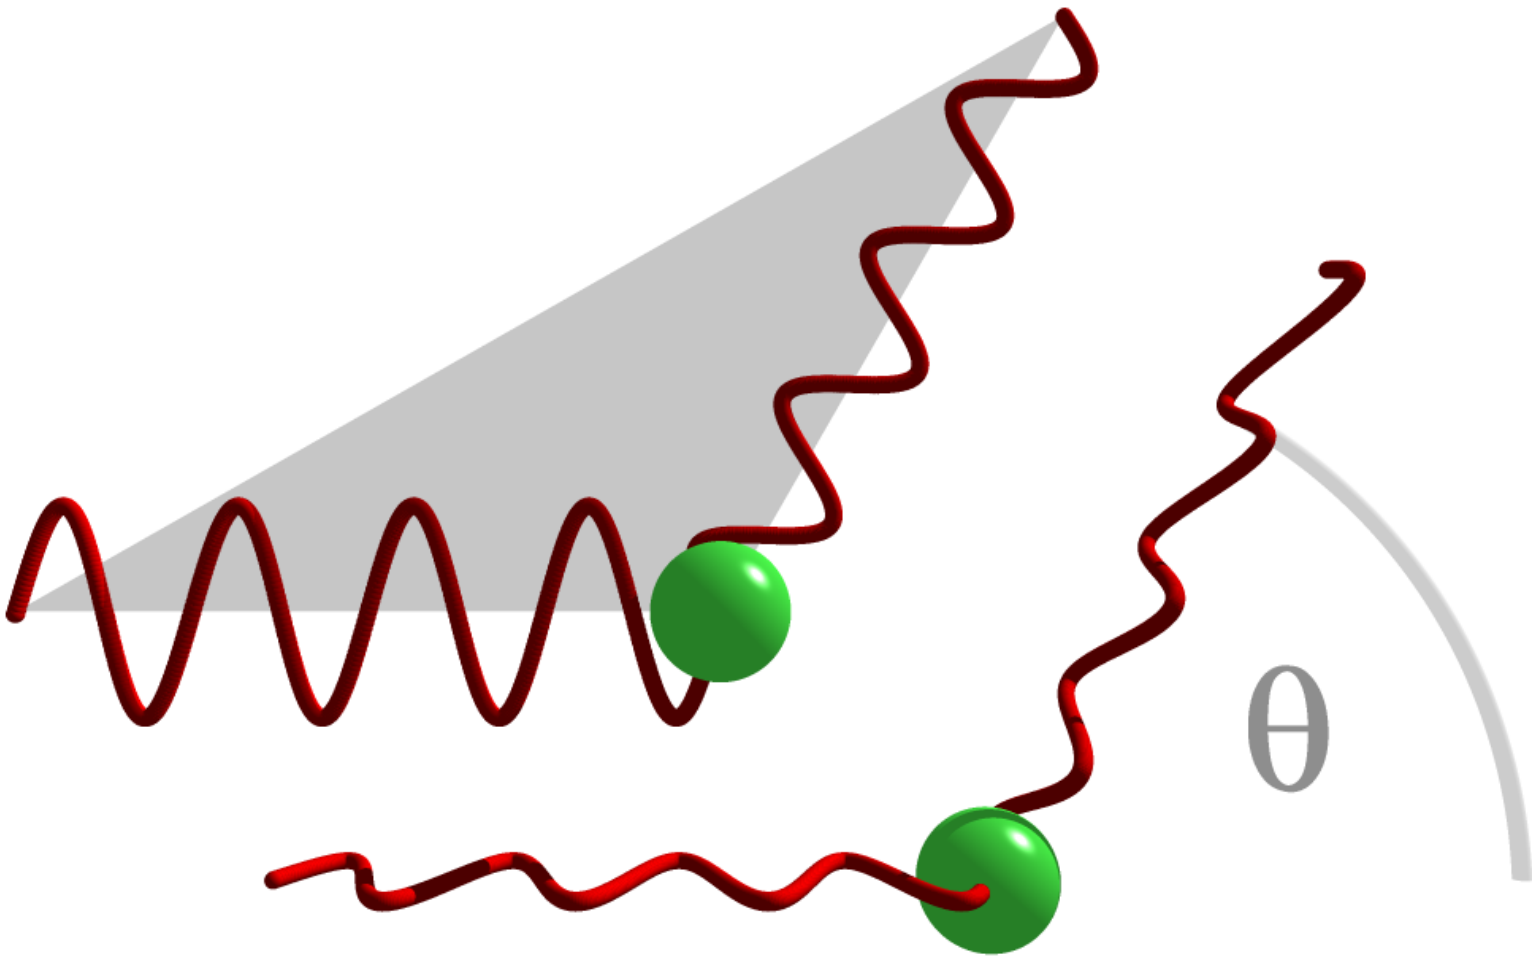

# The Power of Polarized Light Measurements

T Tauri in intensity

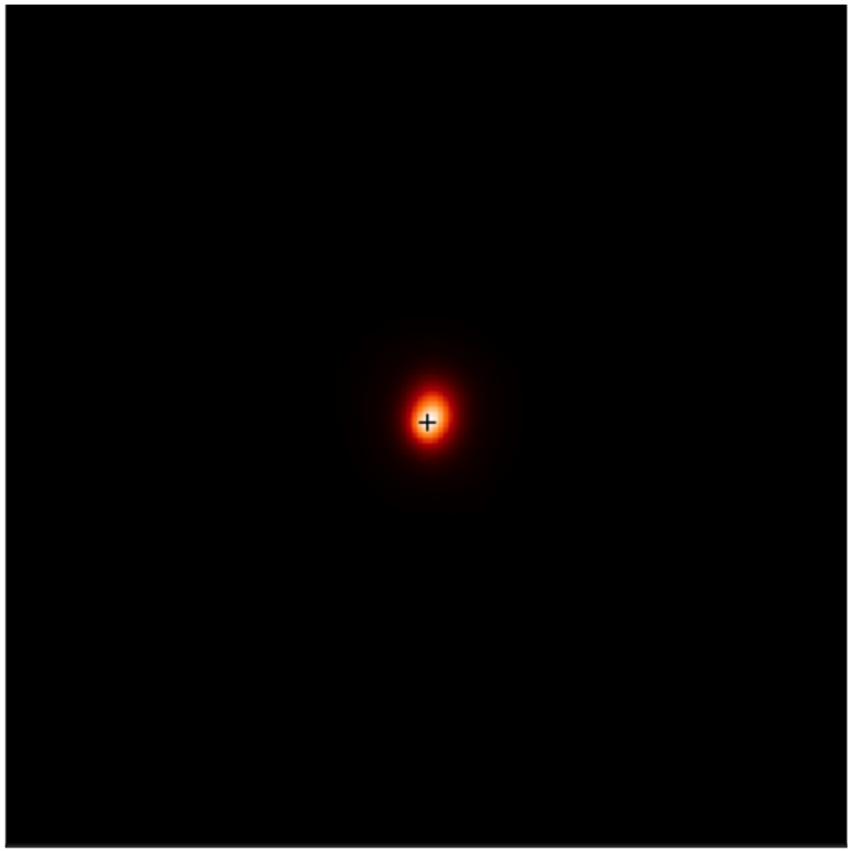

MWC147 in intensity

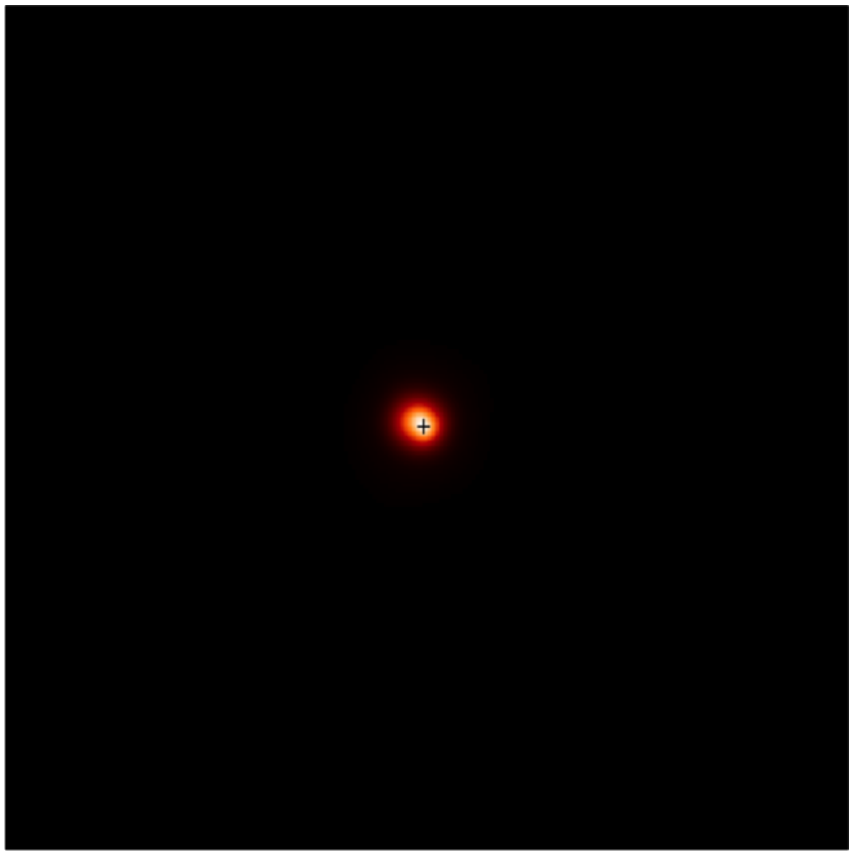

# The Power of Polarimetry

T Tauri in Linear Polarization

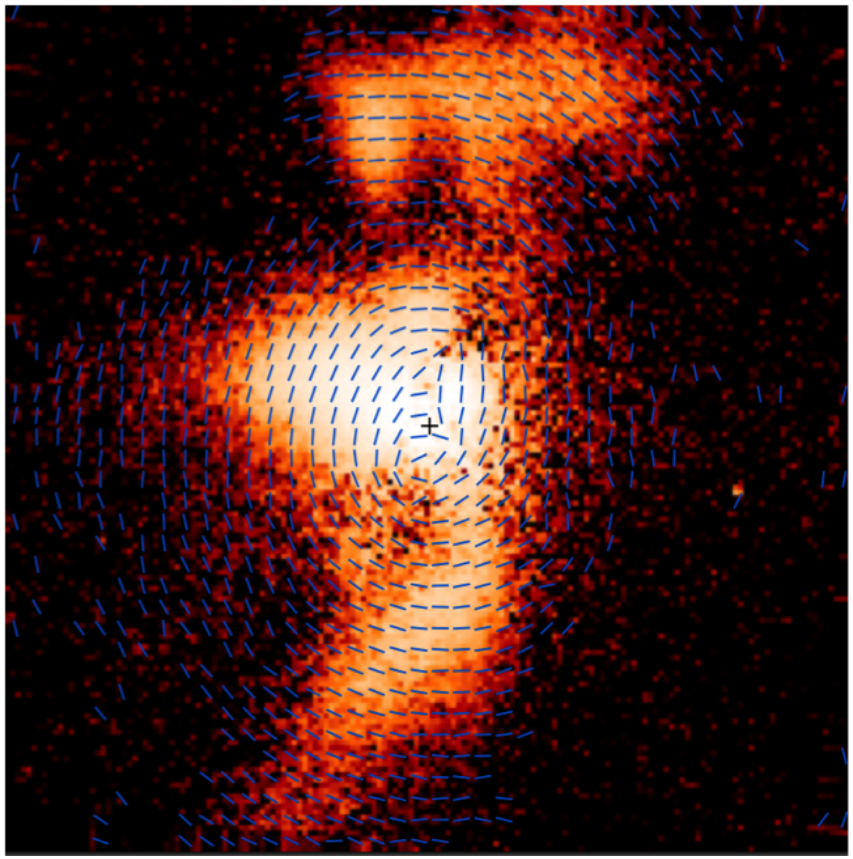

MWC147 in Linear Polarization

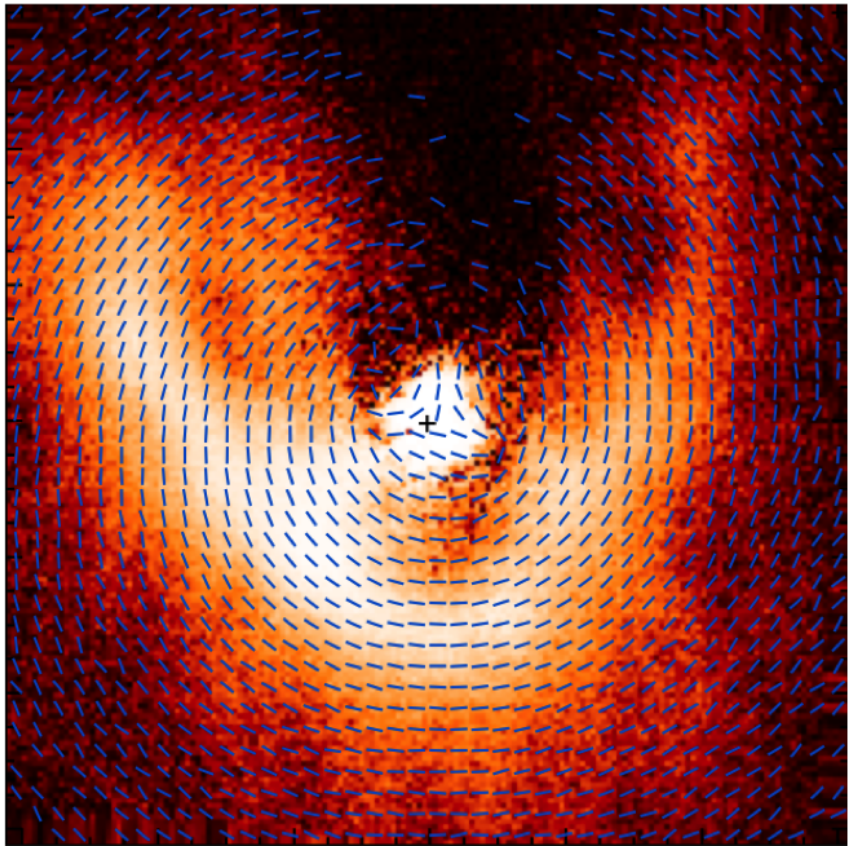

# Solar Magnetic Field Maps from Longitudinal Zeeman Effect

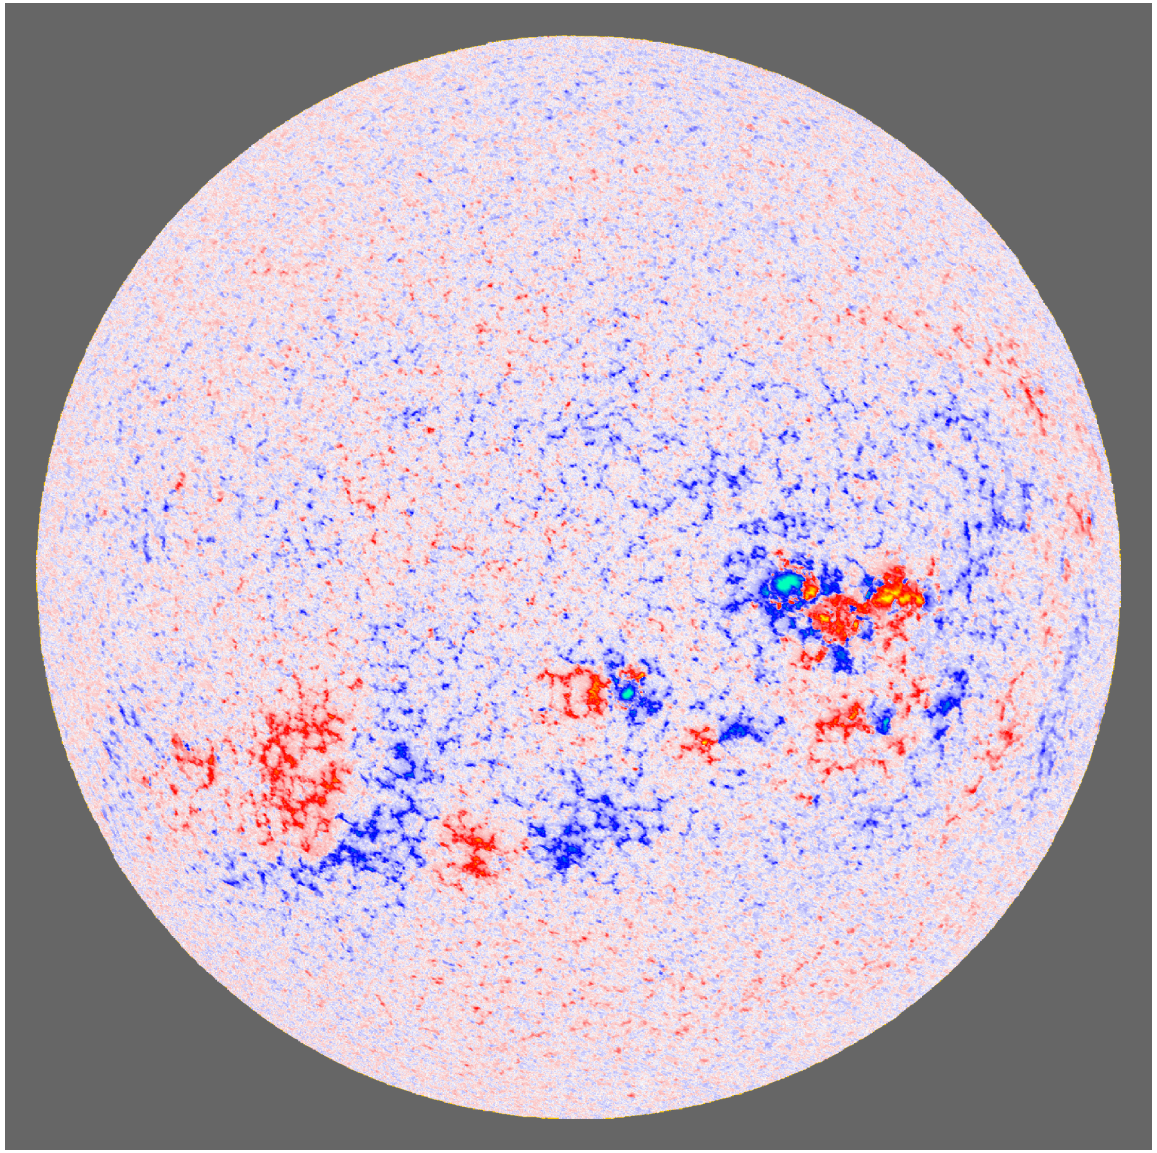

## Summary of Polarization Origin

- Plane Vector Wave ansatz $\vec{E} = \vec{E}_0 e^{i\left(\vec{k}\cdot\vec{x}-\omega t\right)}$
- spatially, temporally constant vector $\vec{E}_0$ lays in plane perpendicular to propagation direction $\vec{k}$
- represent $\vec{E}_0$ in 2-D basis, unit vectors $\vec{e}_x$ and $\vec{e}_y$, both perpendicular to $\vec{k}$

$$\vec{E}_0 = E_x \vec{e}_x + E_y \vec{e}_y.$$

  $E_x$, $E_y$: arbitrary complex scalars
- damped plane-wave solution with given $\omega$, $\vec{k}$ has 4 degrees of freedom (two complex scalars)
- additional property is called *polarization*
- many ways to represent these four quantities
- if $E_x$ and $E_y$ have identical phases, $\vec{E}$ oscillates in fixed plane
- sum of plane waves is also a solution

# Polarization Ellipse

## Polarization Ellipse

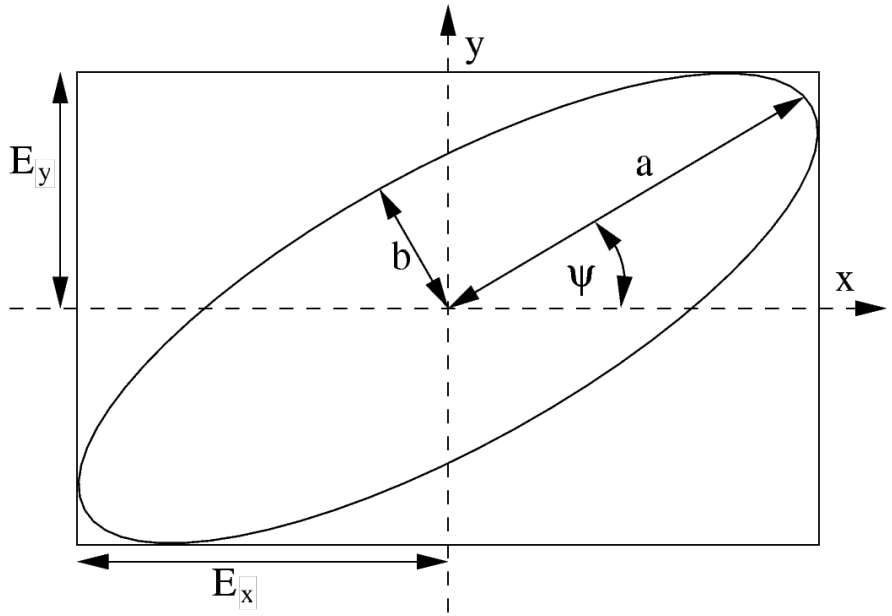


## Polarization

$$\vec{E}(t) = \vec{E}_0 e^{i\left(\vec{k}\cdot\vec{x}-\omega t\right)}$$

$$\vec{E}_0 = |E_x| e^{i\delta_x} \vec{e}_x + |E_y| e^{i\delta_y} \vec{e}_y$$

- wave vector in $z$-direction
- $\vec{e}_x$, $\vec{e}_y$: unit vectors in $x$, $y$
- $|E_x|$, $|E_y|$: (real) amplitudes
- $\delta_{x,y}$: (real) phases

## Polarization Description

- 2 complex scalars not the most useful description
- at given $\vec{x}$, time evolution of $\vec{E}$ described by *polarization ellipse*
- ellipse described by axes $a$, $b$, orientation $\psi$

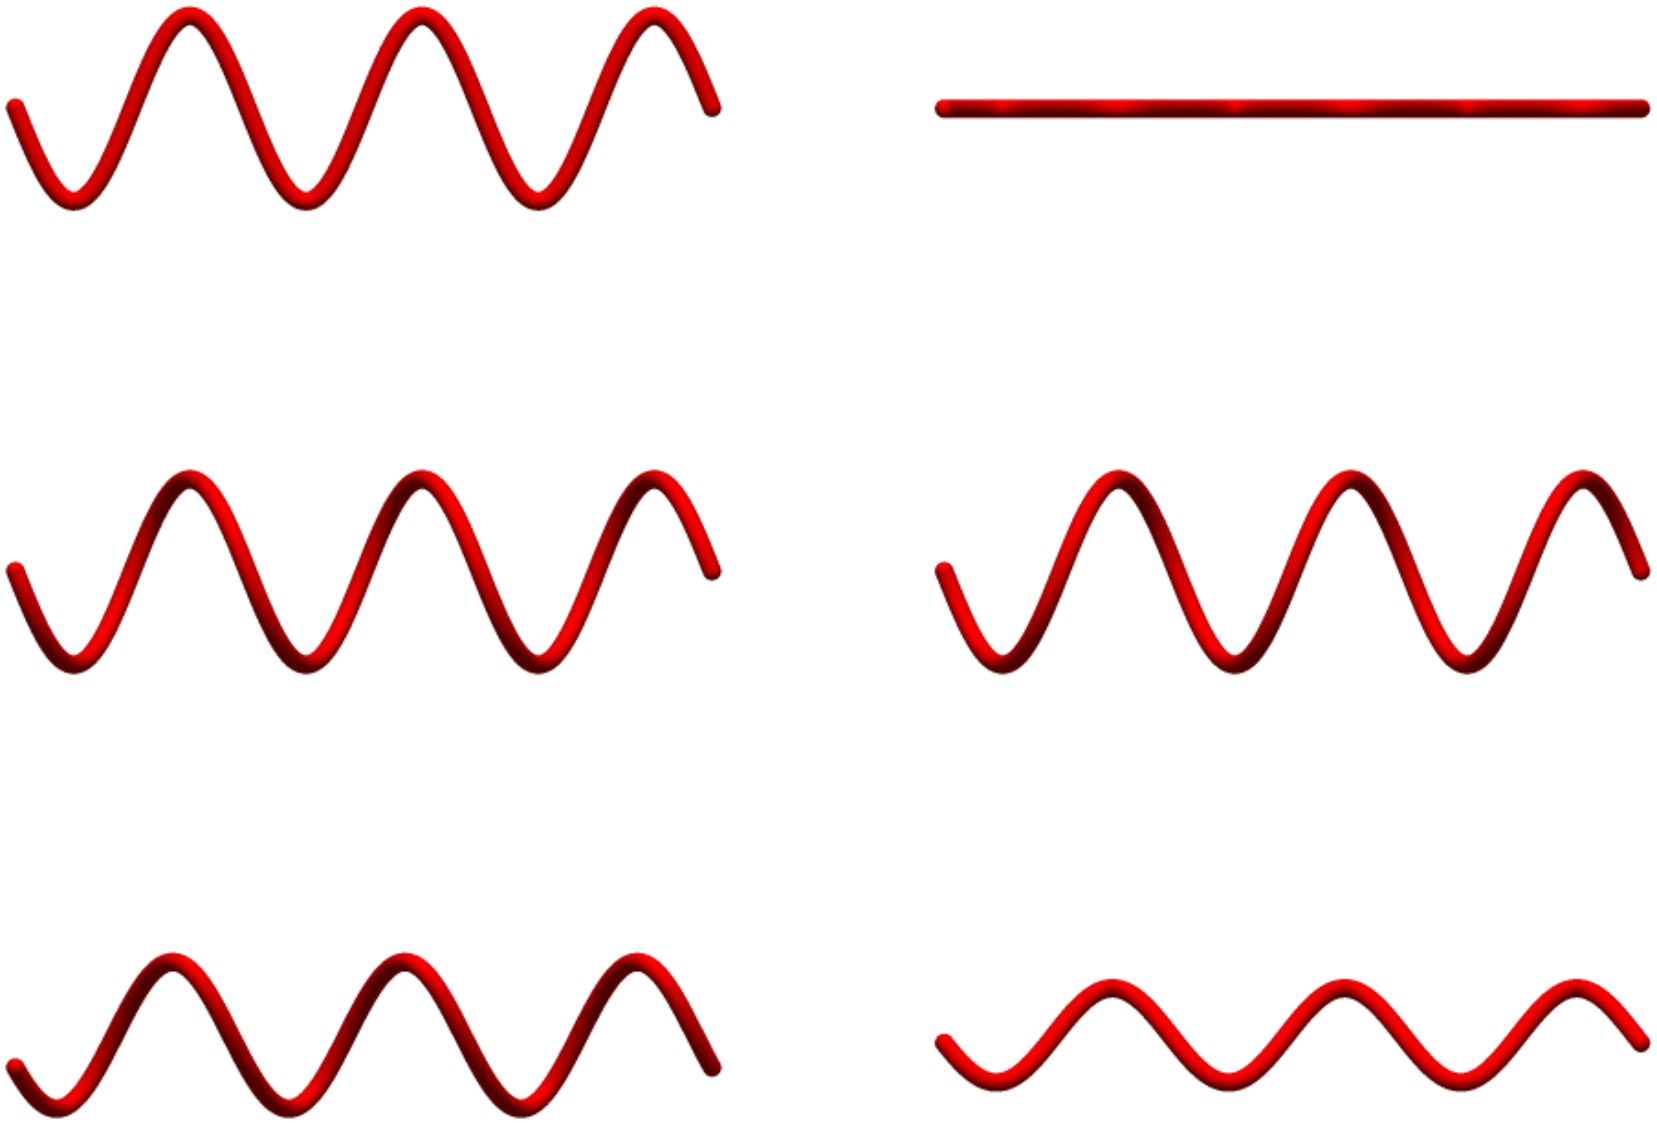

## Jones Vectors

$$\vec{E}_0 = E_x \vec{e}_x + E_y \vec{e}_y$$

- beam in z-direction
- $\vec{e}_x$, $\vec{e}_y$ unit vectors in $x$, $y$-direction
- complex scalars $E_{x,y}$
- Jones vector

$$\vec{e} = \begin{pmatrix} E_x \\ E_y \end{pmatrix}$$

- phase difference between $E_x$, $E_y$ multiple of $\pi$, electric field vector oscillates in a fixed plane $\Rightarrow$ *linear polarization*
- phase difference $\pm\frac{\pi}{2} \Rightarrow$ *circular polarization*

## Summing and Measuring Jones Vectors

$$\vec{E}_0 = E_x \vec{e}_x + E_y \vec{e}_y, \quad \vec{e} = \begin{pmatrix} E_x \\ E_y \end{pmatrix}$$

- Maxwell's equations linear $\Rightarrow$ sum of two solutions again a solution
- Jones vector of sum of two waves $=$ sum of Jones vectors of individual waves if wave vectors $\vec{k}$ the same
- waves must have the same wave vector and direction of propagation
- addition of Jones vectors: *coherent* superposition of waves
- elements of Jones vectors are not observed directly
- observables always depend on products of elements of Jones vectors, i.e. intensity $I = \vec{e} \cdot \vec{e}^* = e_x e_x^* + e_y e_y^*$

## Jones matrices

- influence of medium on polarization described by $2 \times 2$ complex *Jones matrix* J

$$\vec{e}' = \mathrm{J}\vec{e} = \begin{pmatrix} J_{11} & J_{12} \\ J_{21} & J_{22} \end{pmatrix} \vec{e}$$

- assumes that medium not affected by polarization state
- different media 1 to $N$ in order of wave direction $\Rightarrow$ combined influence described by

$$\mathrm{J} = \mathrm{J}_N \mathrm{J}_{N-1} \cdots \mathrm{J}_2 \mathrm{J}_1$$

- order of matrices in product is crucial
- Jones calculus describes coherent superposition of polarized light

## Linear Polarization

- horizontal: $\begin{pmatrix} 1 \\ 0 \end{pmatrix}$
- vertical: $\begin{pmatrix} 0 \\ 1 \end{pmatrix}$
- 45°: $\frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ 1 \end{pmatrix}$

## Circular Polarization

- left: $\frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ i \end{pmatrix}$
- right: $\frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ -i \end{pmatrix}$

## Notes on Jones Formalism

- Jones formalism operates on amplitudes, not intensities
- coherent superposition important for coherent light (lasers, interference effects)
- Jones formalism describes 100% polarized light

## Stokes Vector

- formalism to describe polarization of quasi-monochromatic light
- directly related to measurable intensities
- Stokes vector fulfills these requirements

$$\vec{I} = \begin{pmatrix} I \\ Q \\ U \\ V \end{pmatrix} = \begin{pmatrix} E_x E_x^* + E_y E_y^* \\ E_x E_x^* - E_y E_y^* \\ E_x E_y^* + E_y E_x^* \\ i\left(E_x E_y^* - E_y E_x^*\right) \end{pmatrix} = \begin{pmatrix} |E_x|^2 + |E_y|^2 \\ |E_x|^2 - |E_y|^2 \\ 2|E_x||E_y|\cos\delta \\ 2|E_x||E_y|\sin\delta \end{pmatrix}$$

  Jones vector elements $E_{x,y}$, real amplitudes $|E_{x,y}|$, phase difference $\delta = \delta_y - \delta_x$
- $I^2 \geq Q^2 + U^2 + V^2$
- can describe unpolarized ($Q = U = V = 0$) light

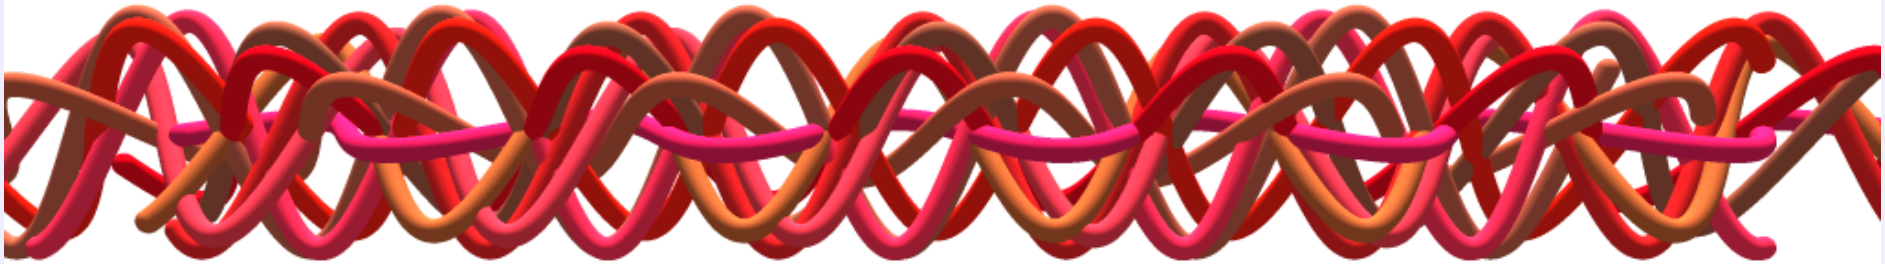



## Stokes Vector Interpretation

$$\vec{I} = \begin{pmatrix} I \\ Q \\ U \\ V \end{pmatrix} = \begin{pmatrix} \text{intensity} \\ \text{linear } 0^\circ - \text{linear } 90^\circ \\ \text{linear } 45^\circ - \text{linear } 135^\circ \\ \text{circular left} - \text{right} \end{pmatrix}$$

- *degree of polarization*

$$P = \frac{\sqrt{Q^2 + U^2 + V^2}}{I}$$

  1 for fully polarized light, 0 for unpolarized light
- summing of Stokes vectors = *incoherent* adding of quasi-monochromatic light waves

## Linear Polarization

- horizontal: $\begin{pmatrix} 1 \\ 1 \\ 0 \\ 0 \end{pmatrix}$
- vertical: $\begin{pmatrix} 1 \\ -1 \\ 0 \\ 0 \end{pmatrix}$
- 45°: $\begin{pmatrix} 1 \\ 0 \\ 1 \\ 0 \end{pmatrix}$

## Circular Polarization

- left: $\begin{pmatrix} 1 \\ 0 \\ 0 \\ 1 \end{pmatrix}$
- right: $\begin{pmatrix} 1 \\ 0 \\ 0 \\ -1 \end{pmatrix}$

## Mueller Matrices

- $4 \times 4$ real Mueller matrices describe (linear) transformation between Stokes vectors when passing through or reflecting from media

$$\vec{I}' = \mathrm{M}\vec{I}\,,$$

$$\mathrm{M} = \begin{pmatrix} M_{11} & M_{12} & M_{13} & M_{14} \\ M_{21} & M_{22} & M_{23} & M_{24} \\ M_{31} & M_{32} & M_{33} & M_{34} \\ M_{41} & M_{42} & M_{43} & M_{44} \end{pmatrix}$$

- $N$ optical elements, combined Mueller matrix is

$$\mathrm{M}' = \mathrm{M}_N \mathrm{M}_{N-1} \cdots \mathrm{M}_2 \mathrm{M}_1$$

## Rotating Mueller Matrices

- optical element with Mueller matrix M
- Mueller matrix of the same element rotated by $\theta$ around the beam given by

$$\mathrm{M}(\theta) = \mathrm{R}(-\theta)\mathrm{M}\mathrm{R}(\theta)$$

with

$$\mathrm{R}(\theta) = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos 2\theta & \sin 2\theta & 0 \\ 0 & -\sin 2\theta & \cos 2\theta & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

# Poincaré Sphere

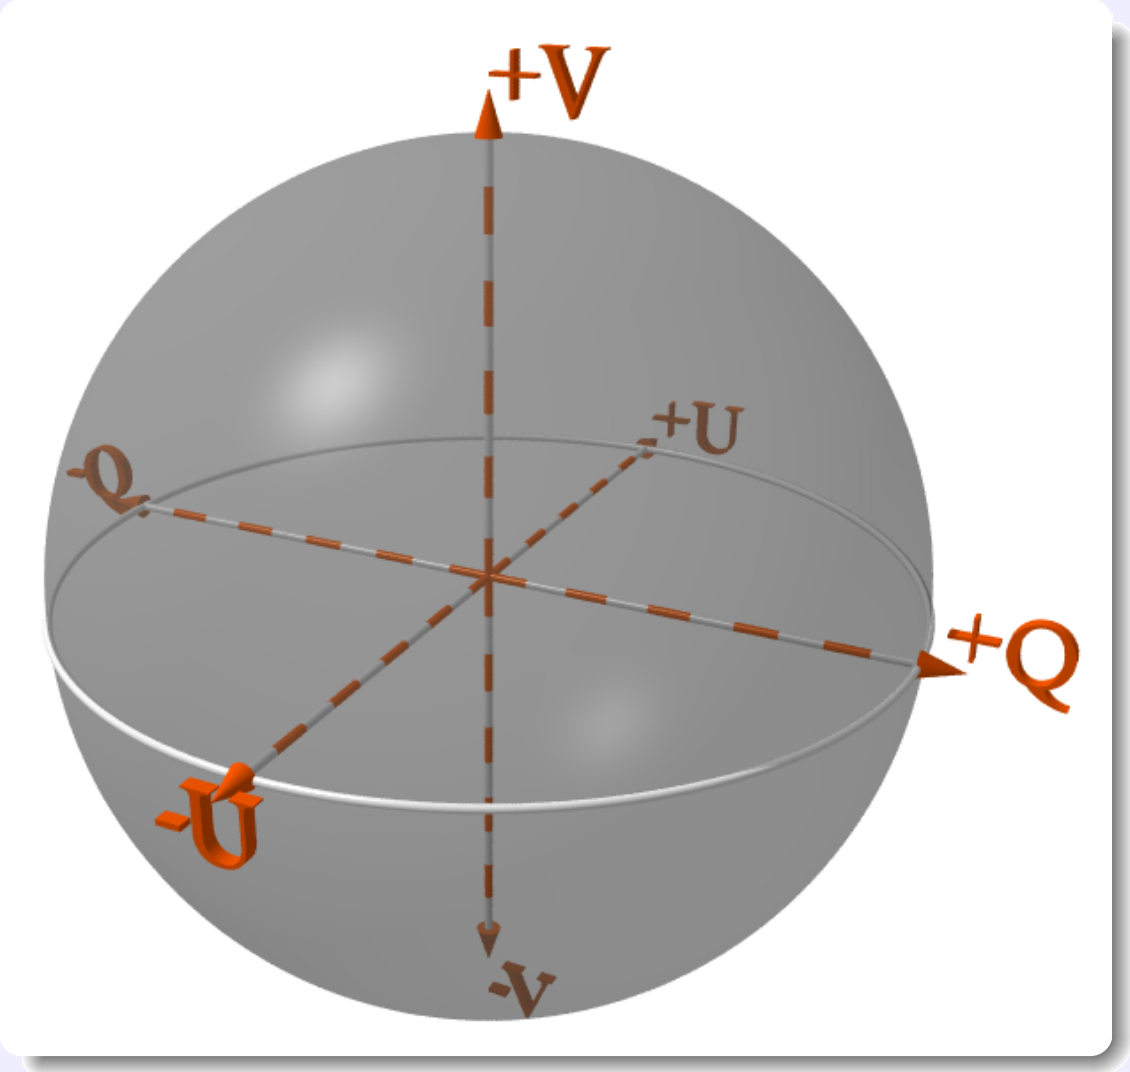


## Relation to Stokes Vector

- fully polarized light: $I^2 = Q^2 + U^2 + V^2$
- for $I^2 = 1$: sphere in $Q$, $U$, $V$ coordinate system
- point on Poincaré sphere represents particular state of polarization
- graphical representation of fully polarized light

# Polarizers


- polarizer: optical element that produces polarized light from unpolarized input light
- linear, circular, or in general elliptical polarizer, depending on type of transmitted polarization
- linear polarizers by far the most common
- large variety of polarizers

## Jones Matrix for Linear Polarizers

- Jones matrix for linear polarizer: $\mathrm{J}_p = \begin{pmatrix} p_x & 0 \\ 0 & p_y \end{pmatrix}$
- $0 \leq p_x \leq 1$ and $0 \leq p_y \leq 1$, real: transmission factors for $x$, $y$-components of electric field: $E'_x = p_x E_x, \quad E'_y = p_y E_y$
- $p_x = 1,\ p_y = 0$: linear polarizer in $+Q$ direction
- $p_x = 0,\ p_y = 1$: linear polarizer in $-Q$ direction
- $p_x = p_y$: neutral density filter

## Mueller Matrix for Linear Polarizers

$$\mathrm{M}_{\mathrm{horizontal}} = \frac{1}{2}\begin{pmatrix} 1 & 1 & 0 & 0 \\ 1 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix}, \quad \mathrm{M}_{\mathrm{vertical}} = \frac{1}{2}\begin{pmatrix} 1 & -1 & 0 & 0 \\ -1 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix}$$

## Mueller Matrix for Ideal Linear Polarizer at Angle $\theta$

$$\mathrm{M}_{\mathrm{pol}}(\theta) = \frac{1}{2}\begin{pmatrix} 1 & \cos 2\theta & \sin 2\theta & 0 \\ \cos 2\theta & \cos^2 2\theta & \sin 2\theta \cos 2\theta & 0 \\ \sin 2\theta & \sin 2\theta \cos 2\theta & \sin^2 2\theta & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix}$$

## Poincare Sphere

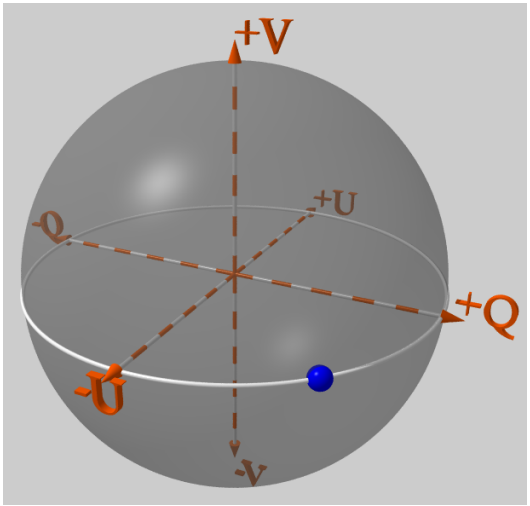


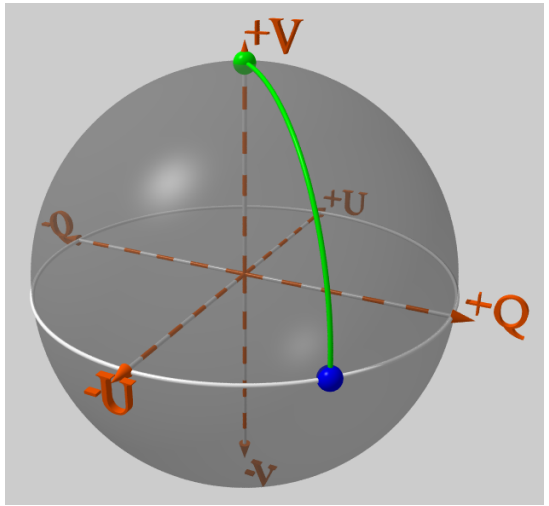


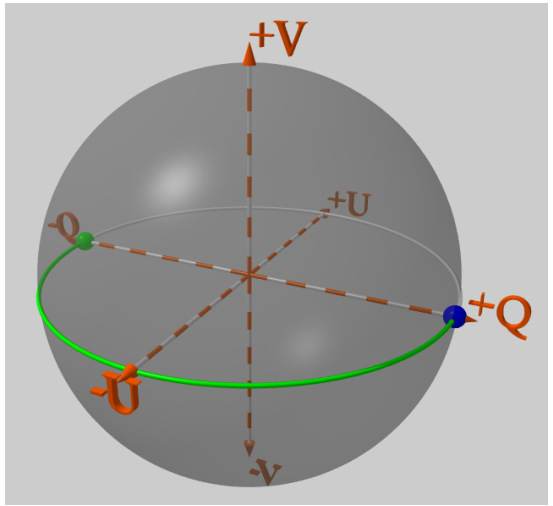


- polarizer is a point on the Poincaré sphere
- transmitted intensity: $\cos^2(l/2)$, $l$ is arch length of great circle between incoming polarization and polarizer on Poincaré sphere

# Wire Grid Polarizers

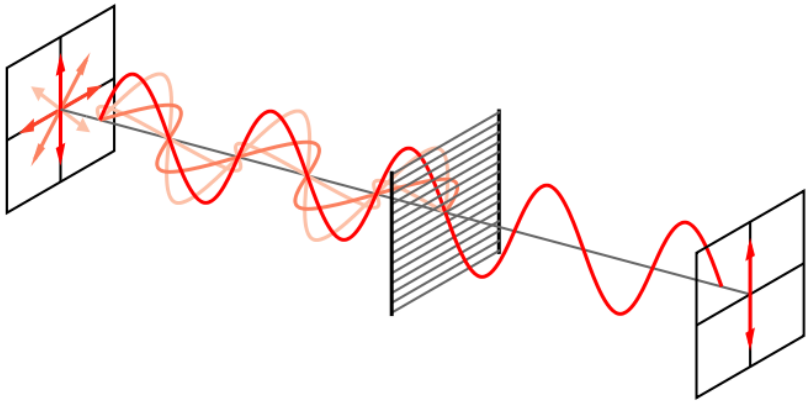


- parallel conducting wires, spacing $d \lesssim \lambda$ act as polarizer
- electric field parallel to wires induces electrical currents in wires
- induced electrical current reflects polarization parallel to wires
- polarization perpendicular to wires is transmitted
- rule of thumb:
  - $d < \lambda/2 \Rightarrow$ strong polarization
  - $d \gg \lambda \Rightarrow$ high transmission of both polarization states (weak polarization)

## Polaroid-type Polarizers

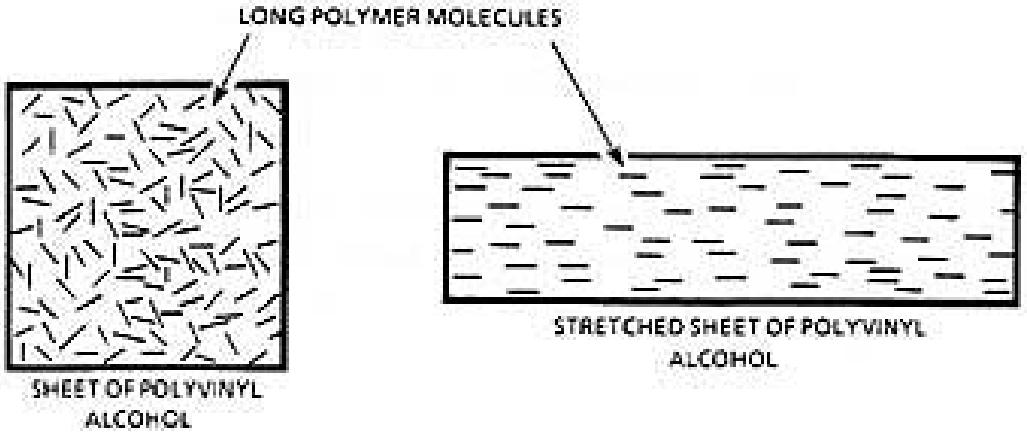


- developed by Edwin Land in 1938 $\Rightarrow$ Polaroid
- sheet polarizers: stretched polyvynil alcohol (PVA) sheet, laminated to sheet of cellulose acetate butyrate, treated with iodine
- PVA-iodine complex analogous to short, conducting wire
- cheap, can be manufactured in large sizes

## Crystal-Based Polarizers

- crystals make highest-quality polarizers
- precise arrangement of atom/molecules and anisotropy of index of refraction separate incoming beam into two beams with precisely orthogonal linear polarization states
- work well over large wavelength range
- many different configurations
- calcite most often used in crystal-based polarizers because of large birefringence, low absorption in visible
- many other suitable crystals

## Indices of Refraction of Crystal

- in anisotropic material: dielectric constant is a tensor
- Maxwell equations imply symmetric dielectric tensor

$$\epsilon = \epsilon^T = \begin{pmatrix} \epsilon_{11} & \epsilon_{12} & \epsilon_{13} \\ \epsilon_{12} & \epsilon_{22} & \epsilon_{23} \\ \epsilon_{13} & \epsilon_{23} & \epsilon_{33} \end{pmatrix}$$

- symmetric tensor of rank 2 $\Rightarrow$ Cartesian coordinate system exists where tensor is diagonal
- 3 *principal indices of refraction* in coordinate system spanned by principal axes

$$\vec{D} = \begin{pmatrix} n_x^2 & 0 & 0 \\ 0 & n_y^2 & 0 \\ 0 & 0 & n_z^2 \end{pmatrix} \vec{E}$$

# Uniaxial Materials

- anisotropic materials: $n_x \neq n_y \neq n_z$
- *uniaxial materials*: $n_x = n_y \neq n_z$
- *optic axis* is axis that has different index of refraction, also called $c$ or *crystallographic axis*
- *ordinary index*: $n_o = n_x = n_y$
- *extraordinary index*: $n_e = n_z$
- *fast axis*: axis with smallest index
- rotation of coordinate system around $z$ has no effect
- most materials used in polarimetry are (almost) uniaxial, e.g. calcite

# Plane Waves in Anisotropic Media

- no net charges,
  $\nabla \cdot \vec{D} = 0 \Rightarrow \vec{D} \cdot \vec{k} = 0 \Rightarrow \vec{D} \perp \vec{k}$
- $\vec{D} \nparallel \vec{E} \Rightarrow \vec{E} \not\perp \vec{k}$
- scalar $\mu$, no current density $\Rightarrow \vec{H} \parallel \vec{B}$
- $\nabla \cdot \vec{H} = 0 \Rightarrow \vec{H} \perp \vec{k}$
- $\nabla \times \vec{H} = \frac{1}{c}\frac{\partial \vec{D}}{\partial t} \Rightarrow \vec{H} \perp \vec{D}$
- $\nabla \times \vec{E} = -\frac{\mu}{c}\frac{\partial \vec{H}}{\partial t} \Rightarrow \vec{H} \perp \vec{E}$
- $\vec{D}$, $\vec{E}$, and $\vec{k}$ all in one plane
- $\vec{H}$, $\vec{B}$ perpendicular to that plane
- Poynting vector $\vec{S} = \frac{c}{4\pi}\vec{E} \times \vec{H}$ perpendicular to $\vec{E}$ and $\vec{H} \Rightarrow \vec{S}$ (in general) not parallel to $\vec{k}$
- energy (in general) not transported in direction of wave vector $\vec{k}$

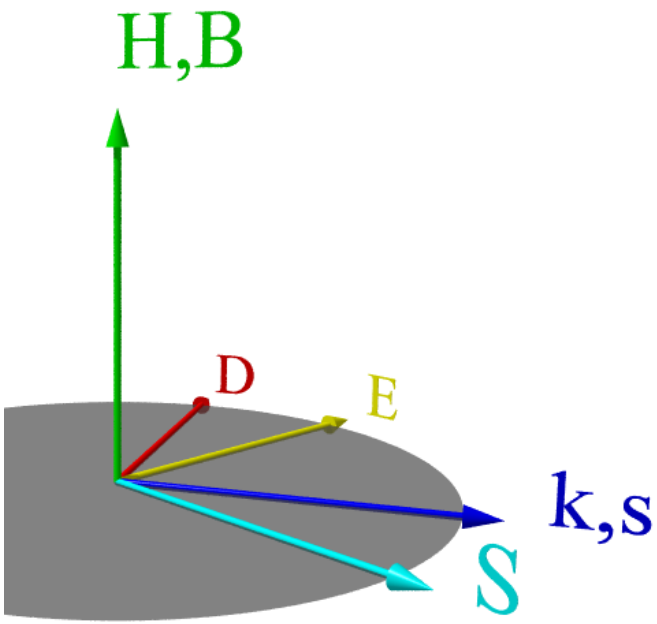

## Wave Propagation in Uniaxial Media

- two solutions to wave equation with orthogonal linear polarizations
- ordinary ray propagates as in isotropic medium with index $n_o$
- extraordinary ray sees direction-dependent index of refraction

$$n_2(\theta) = \frac{n_o n_e}{\sqrt{n_o^2 \sin^2\theta + n_e^2 \cos^2\theta}}$$

$n_2$ direction-dependent index of refraction of the extraordinary ray
$n_o$ ordinary index of refraction
$n_e$ extraordinary index of refraction
$\theta$ angle between extraordinary wave vector and optic axis

- for $\theta = 0$ $n_2 = n_o$, for $\theta = 90^\circ$ $n_2 = n_e$

# Energy Propagation in Uniaxial Media

- ordinary ray propagates along wave vector $\vec{k}$ with electric field perpendicular to c-axis
- extraordinary ray and wave vector make *dispersion angle* $\alpha$

$$\tan\alpha = \frac{(n_e^2 - n_o^2)\tan\theta}{n_e^2 + n_o^2\tan^2\theta}$$

- dispersion angle $\alpha = 0$ for $\theta = 0$ or $\theta = 90°$
- extraordinary electric field in plane of wave vector and optic axis

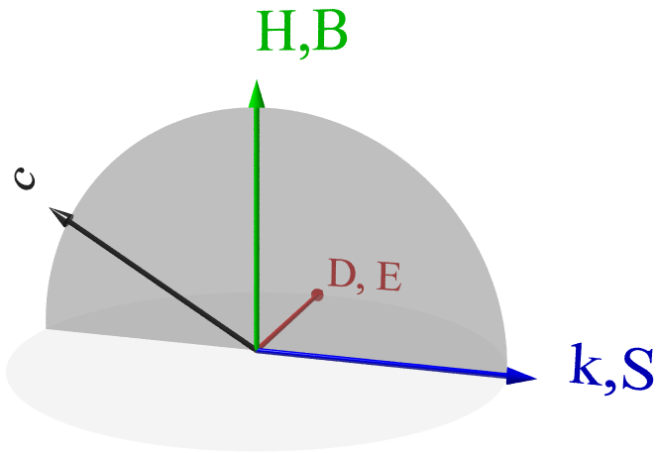


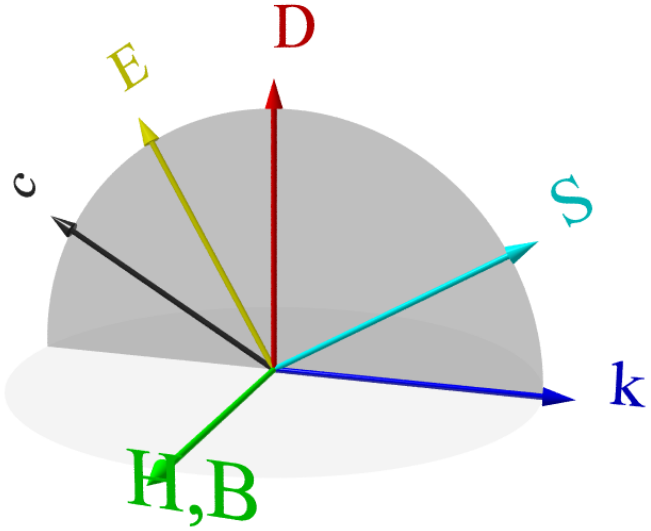

## Crystal-Based Polarizing Beamsplitter

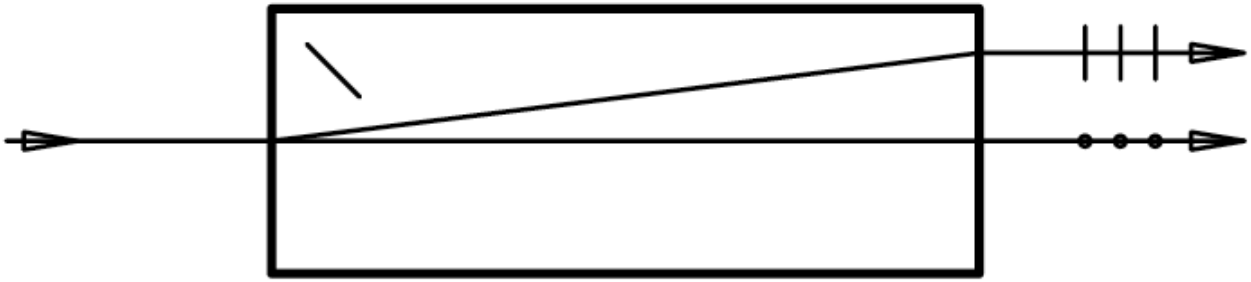

- one linear polarization goes straight through as in isotropic material (*ordinary ray*)
- perpendicular linear polarization propagates at an angle (*extraordinary ray*)
- different optical path lengths
- crystal aberrations

# Brewster Angle Polarizer

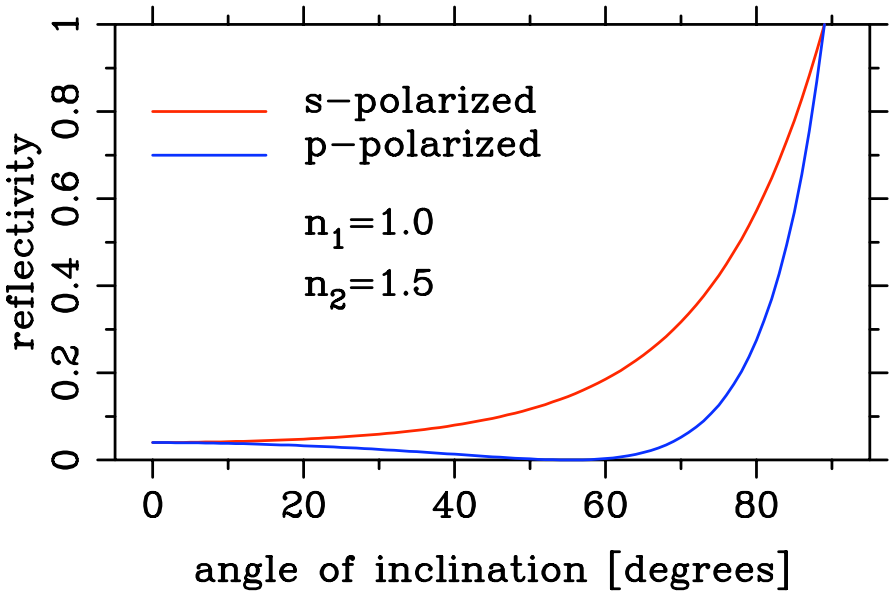


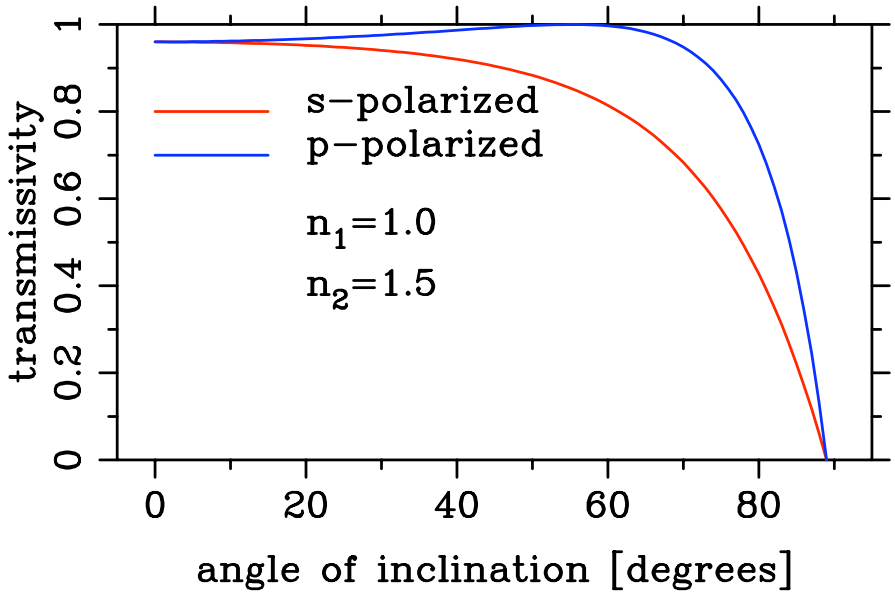


- $r_p = \frac{\tan(\theta_i - \theta_t)}{\tan(\theta_i + \theta_t)} = 0$ when $\theta_i + \theta_t = \frac{\pi}{2}$
- corresponds to *Brewster angle* of incidence of $\tan\theta_B = \frac{n_2}{n_1}$
- occurs when reflected wave is perpendicular to transmitted wave
- reflected light is completely s-polarized
- transmitted light is moderately polarized

# Total Internal Reflection (TIR)

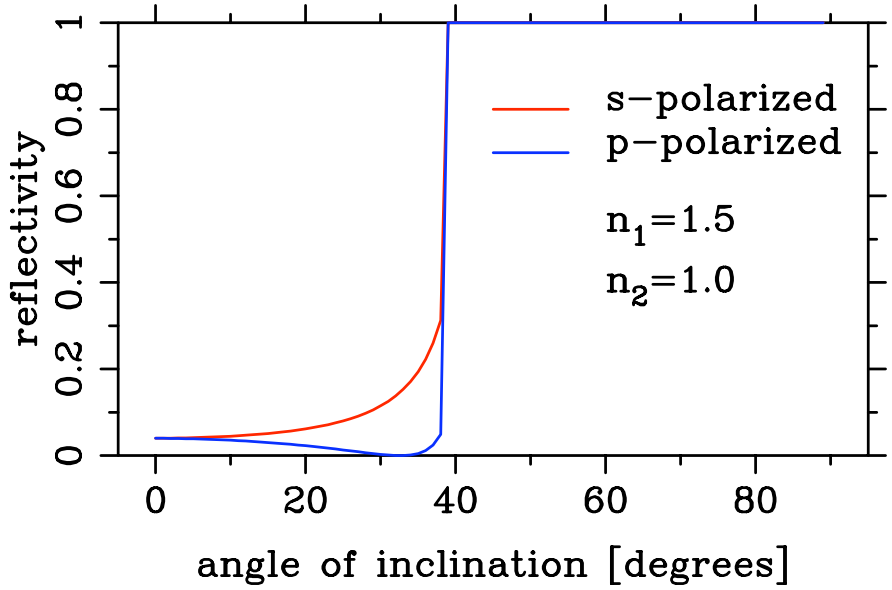


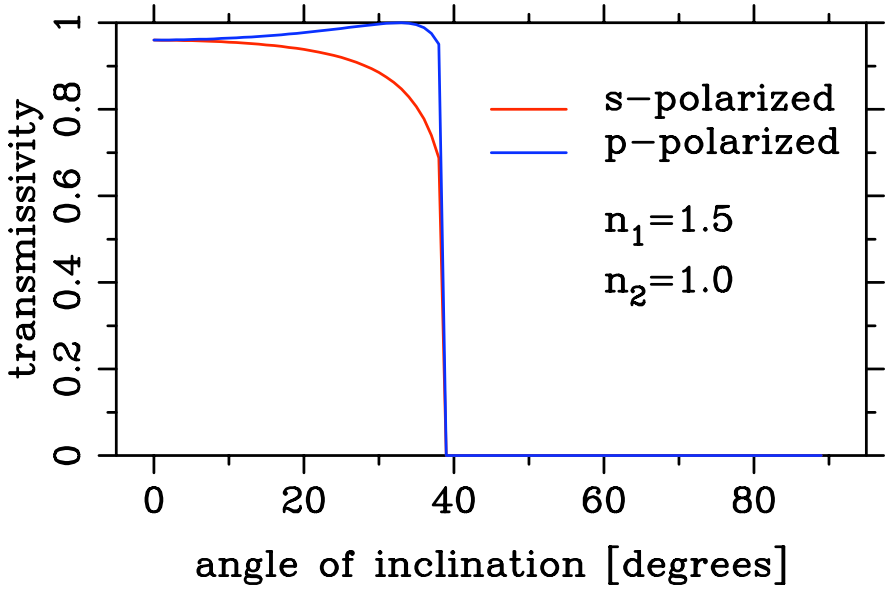


- Snell's law: $\sin\theta_t = \frac{n_1}{n_2}\sin\theta_i$
- high-index to lower index medium (e.g. glass to air): $n_1/n_2 > 1$
- right-hand side $> 1$ for $\sin\theta_i > \frac{n_2}{n_1}$
- all light is reflected in high-index medium $\Rightarrow$ *total internal reflection*
- transmitted wave has complex phase angle $\Rightarrow$ damped wave along interface

# Total Internal Reflection (TIR) in Crystals

- $n_o \neq n_e \Rightarrow$ one beam can be totally reflected while other is transmitted
- principal of most crystal polarizers
- calcite at 632.8 nm: $n_o = 1.6558$, $n_e = 1.4852$
- requirement for total reflection $\frac{n_2}{\sin}\theta > 1$
- entrance: extraordinary ray not refracted, two rays propagate according to indices $n_o$,$n_e$
- exit: rays (and wave vectors) at 40° to surface
- for $\theta = 40°$ extraordinary ray is transmitted, ordinary ray undergoes TIR

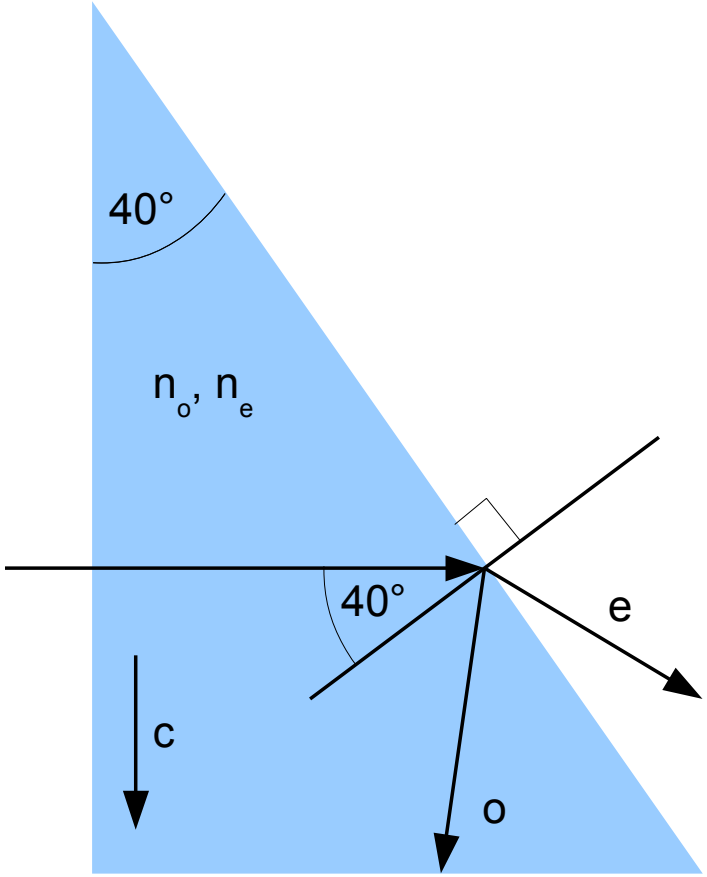

## Wollaston Prism

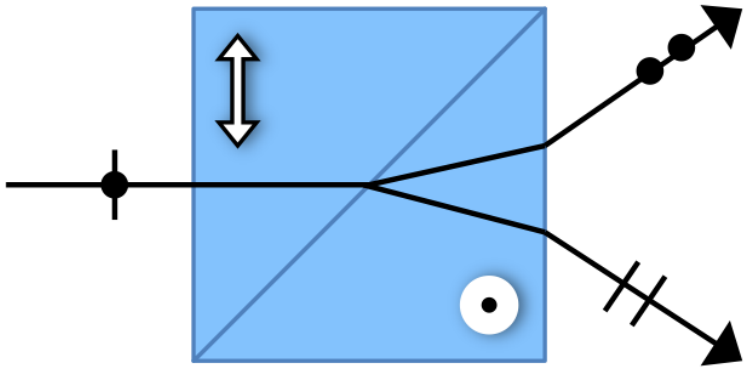

## Foster Prism

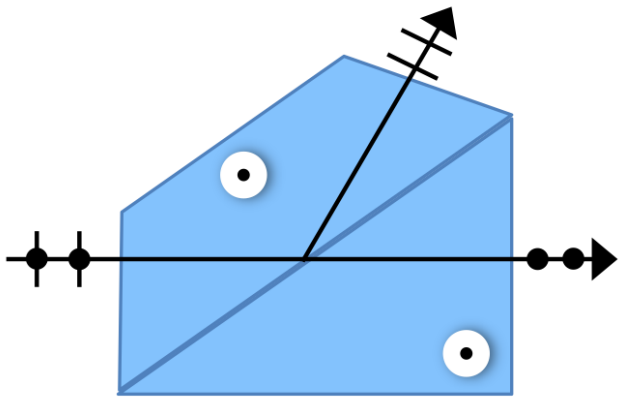

## Savart Plate

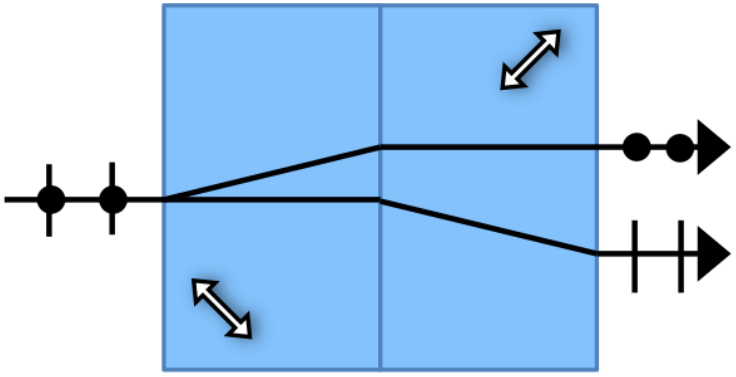

# Linear Retarders or Wave Plates

- uniaxial crystal, optic axis parallel to surface ($\theta = 90°$)
- fast axis (f) has lowest index, slow axis (s) has highest index
- example: halfwave retarder

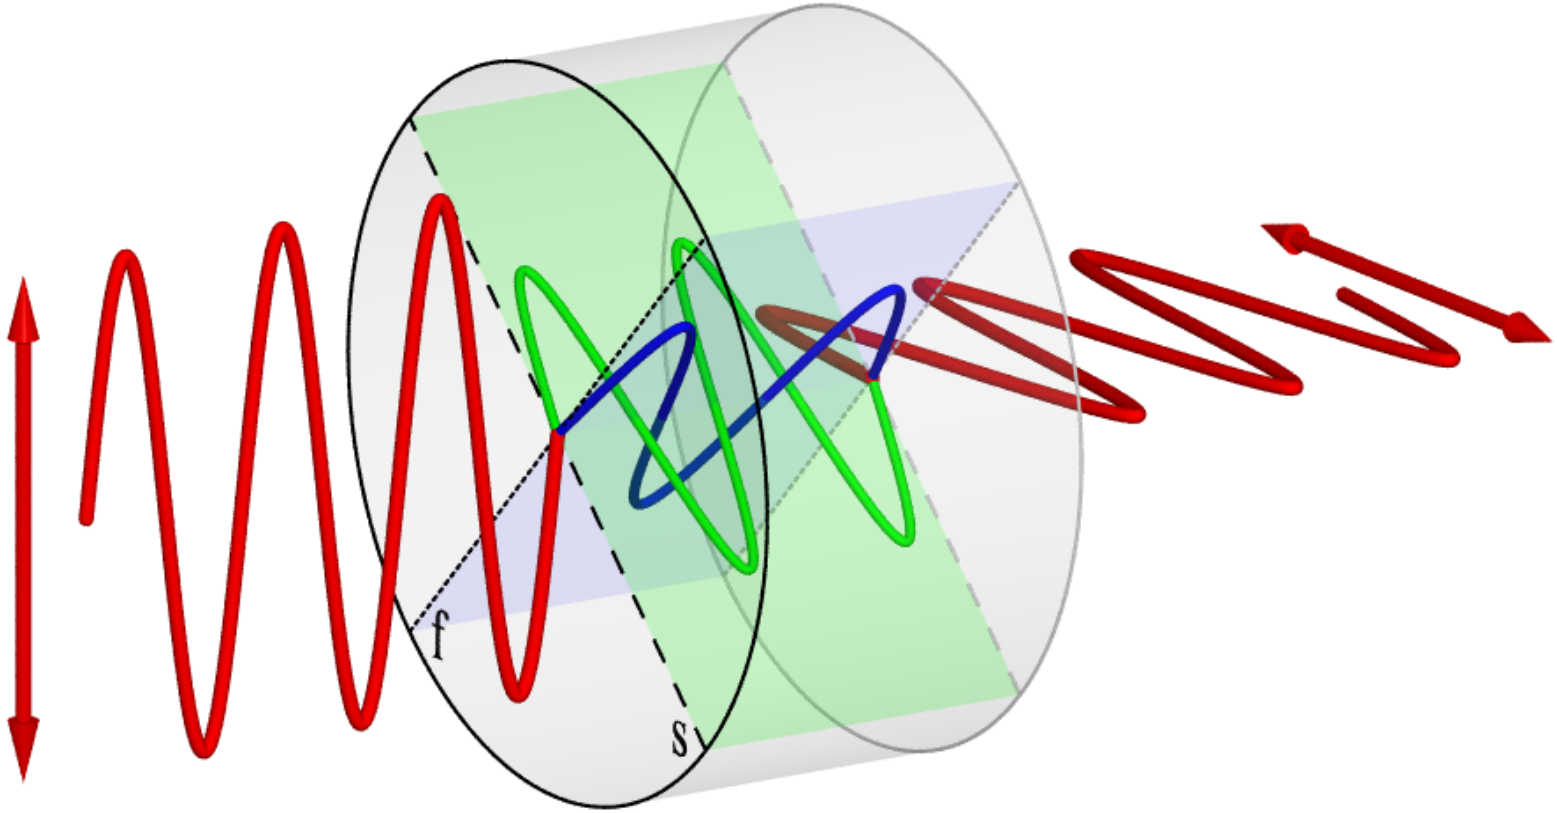

## Phase Delay between Ordinary and Extraordinary Rays

- ordinary and extraordinary wave propagate in same direction
- ordinary ray propagates with speed $\frac{c}{n_o}$
- extraordinary beam propagates at different speed $\frac{c}{n_e}$
- $\vec{E}_o$, $\vec{E}_e$ perpendicular to each other $\Rightarrow$ plane wave with arbitrary polarization can be (coherently) decomposed into components parallel to $\vec{E}_o$ and $\vec{E}_e$
- 2 components will travel at different speeds
- (coherently) superposing 2 components after distance $d \Rightarrow$ phase difference between 2 components $\frac{\omega}{c}(n_e - n_o)d$ radians
- phase difference $\Rightarrow$ change in polarization state
- basis for constructing linear retarders

## Retarder Properties

- does not change intensity or degree of polarization
- characterized by two (not identical, not trivial) Stokes vectors of incoming light that are not changed by retarder $\Rightarrow$ *eigenvectors* of retarder
- depending on polarization described by eigenvectors, retarder is
  - *linear retarder*
  - *circular retarder*
  - *elliptical retarder*
- linear, circular retarders are special cases of elliptical retarders
- circular retarders sometimes called *rotators* since they rotate the orientation of linearly polarized light
- linear retarders by far the most common type of retarder
- retardation depends strongly on wavelength
- achromatic retarders: combinations of different materials or the same materials with different fast axis directions

## Jones Matrix for Linear Retarders

- linear retarder with fast axis at 0° characterized by Jones matrix

$$\mathrm{J}_r(\delta) = \begin{pmatrix} e^{i\delta} & 0 \\ 0 & 1 \end{pmatrix}, \quad \mathrm{J}_r(\delta) = \begin{pmatrix} e^{i\frac{\delta}{2}} & 0 \\ 0 & e^{-i\frac{\delta}{2}} \end{pmatrix}$$

- $\delta$: phase shift between two linear polarization components (in radians)
- absolute phase does not matter

## Mueller Matrix for Linear Retarder

$$\mathrm{M}_r = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & \cos\delta & -\sin\delta \\ 0 & 0 & \sin\delta & \cos\delta \end{pmatrix}$$

# Quarter-Wave Plate on the Poincaré Sphere

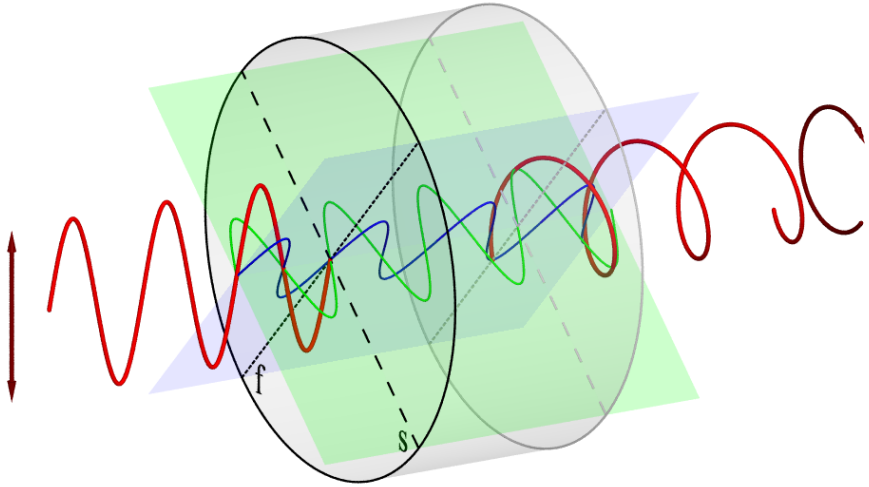


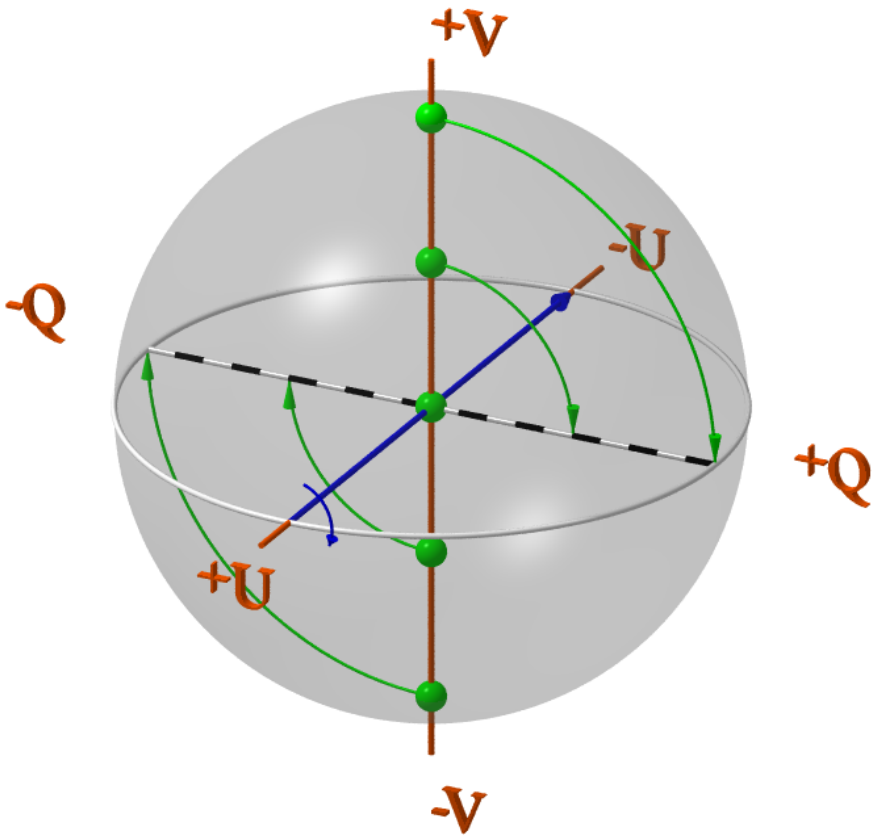


- retarder eigenvector (fast axis) in Poincaré sphere
- points on sphere are rotated around retarder axis by amount of retardation

# Phase Change on Total Internal Reflection (TIR)

- TIR induces phase change that depends on polarization
- complex ratios: $r_{s,p} = |r_{s,p}| e^{i\delta_{s,p}}$
- phase change $\delta = \delta_s - \delta_p$

$$\tan\frac{\delta}{2} = \frac{\cos\theta_i \sqrt{\sin^2\theta_i - \left(\frac{n_2}{n_1}\right)^2}}{\sin^2\theta_i}$$

- relation valid between critical angle and grazing incidence
- at critical angle and grazing incidence $\delta = 0$

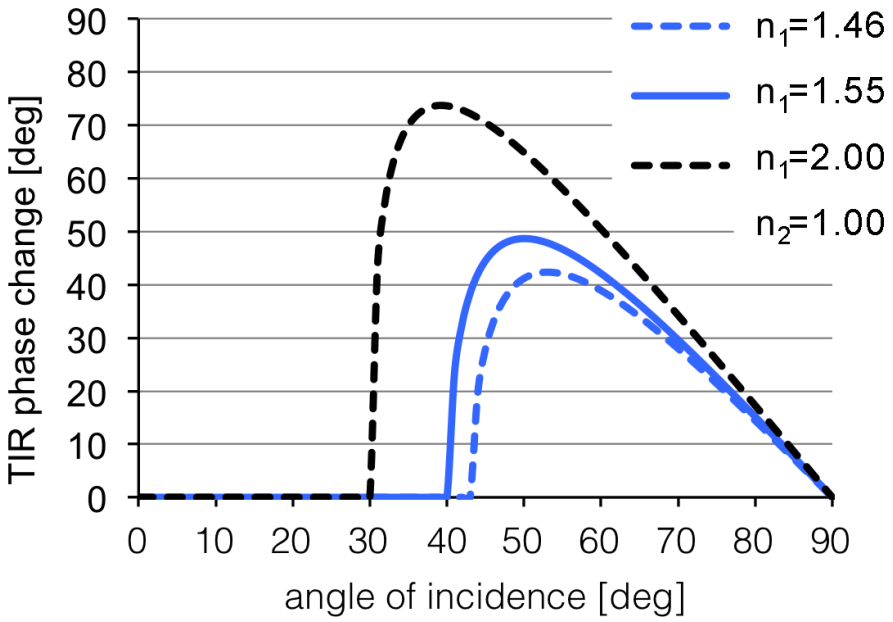


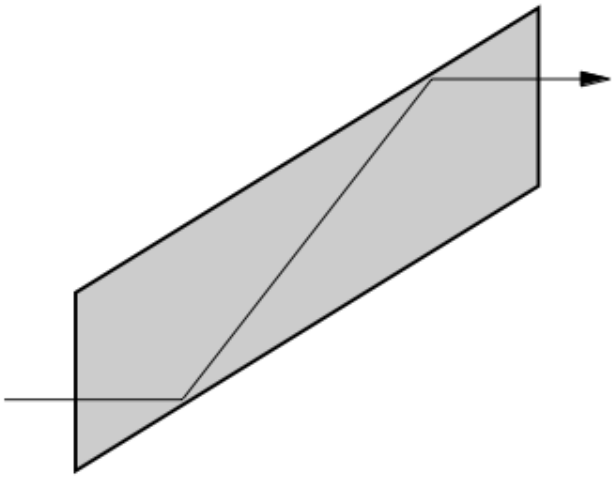

## Variable Retarders

- sensitive polarimeters requires retarders whose properties (retardance, fast axis orientation) can be varied quickly (*modulated*)
- retardance changes (change of birefringence):
  - liquid crystals
  - Faraday, Kerr, Pockels cells
  - piezo-elastic modulators (PEM)
- fast axis orientation changes (change of *c*-axis direction):
  - rotating fixed retarder
  - ferro-electric liquid crystals (FLC)

# Liquid Crystals

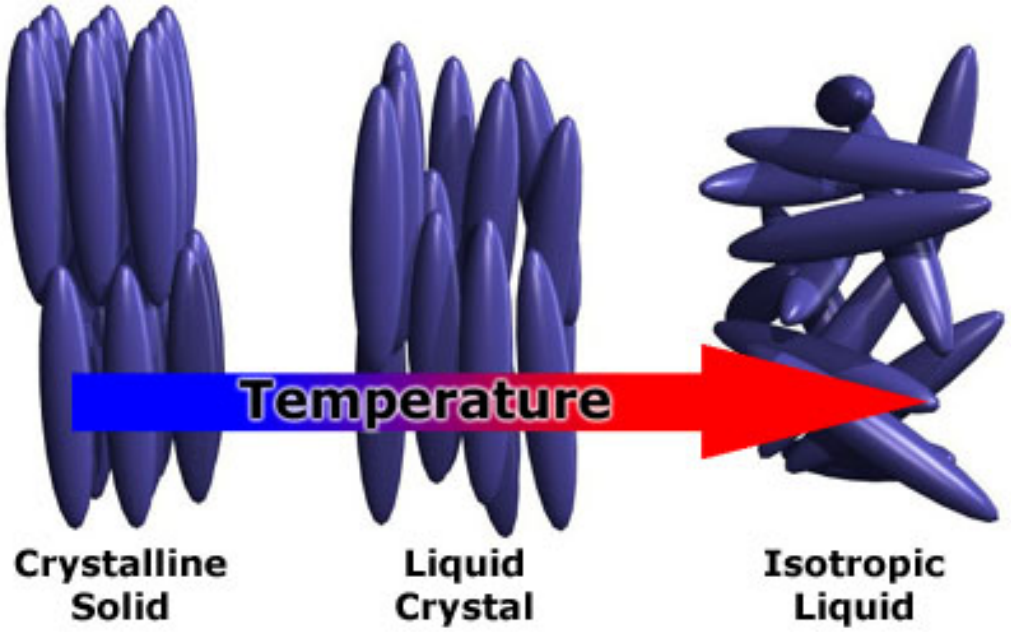


- liquid crystals: fluids with elongated molecules
- at high temperatures: liquid crystal is isotropic
- at lower temperature: molecules become ordered in orientation and sometimes also space in one or more dimensions
- liquid crystals can line up parallel or perpendicular to external electrical field

# Liquid Crystal Retarders

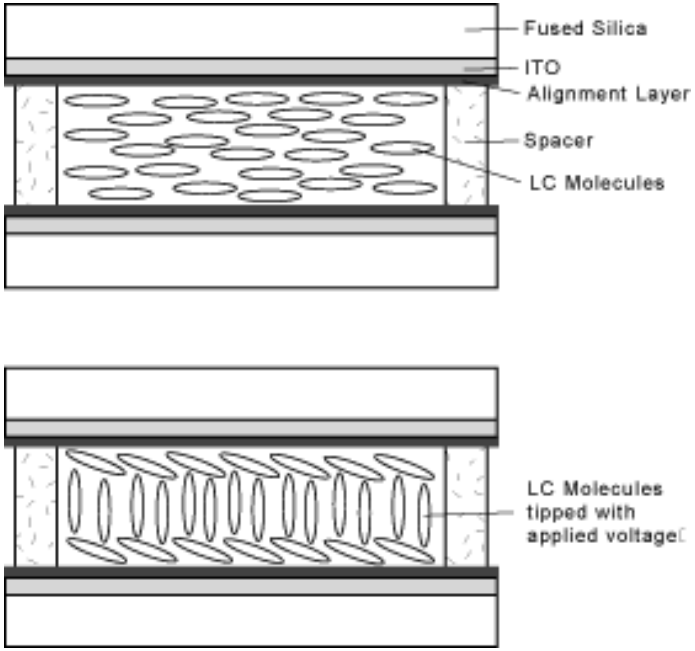


- dielectric constant anisotropy often large $\Rightarrow$ very responsive to changes in applied electric field
- birefringence $\delta n$ can be very large (larger than typical crystal birefringence)
- liquid crystal layer only a few $\mu$m thick
- birefringence shows strong temperature dependence