

Interferometers

OAI 2015 Lecture 12
Kenworthy and Keller

Interferometry is the combination of amplitude and phase from different telescopes

Telescope positions must be known $\ll \lambda$


Lots of small telescopes are cheaper than one big telescope!

Done for radio telescopes but difficult for optical telescopes - why?



An Antenna converts EM radiation in space into electrical currents in conductors

They can be used for transmitting and receiving

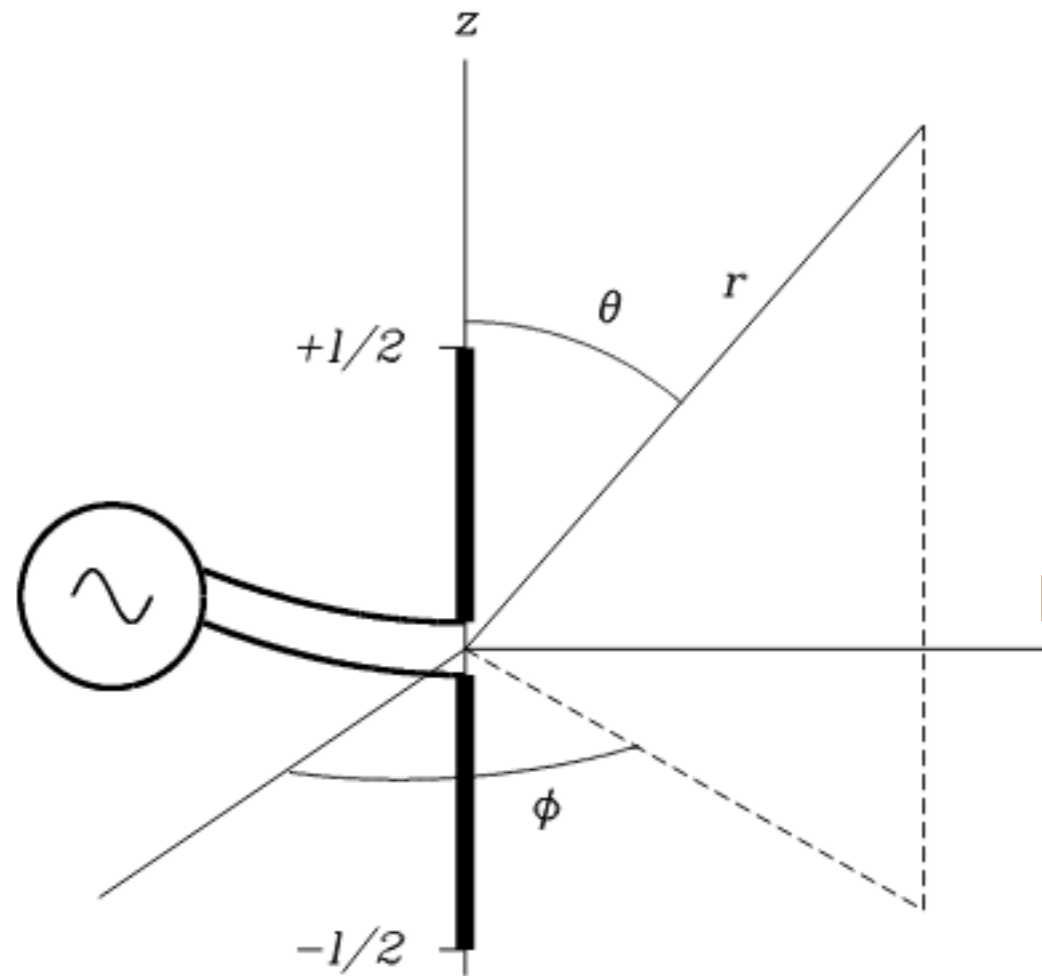

A dipole antenna converts EM to accelerating charges appearing as an alternating electric current

Phase of alternating current is correlated with **phase** of incoming EM wave

A simple dipole antenna


The Antenna Theorem

The radiation pattern of an antenna is time-reversible

The transmission pattern is the same as the reception pattern!

Thermodynamic cavity temperature T

Resistor R also at temperature T

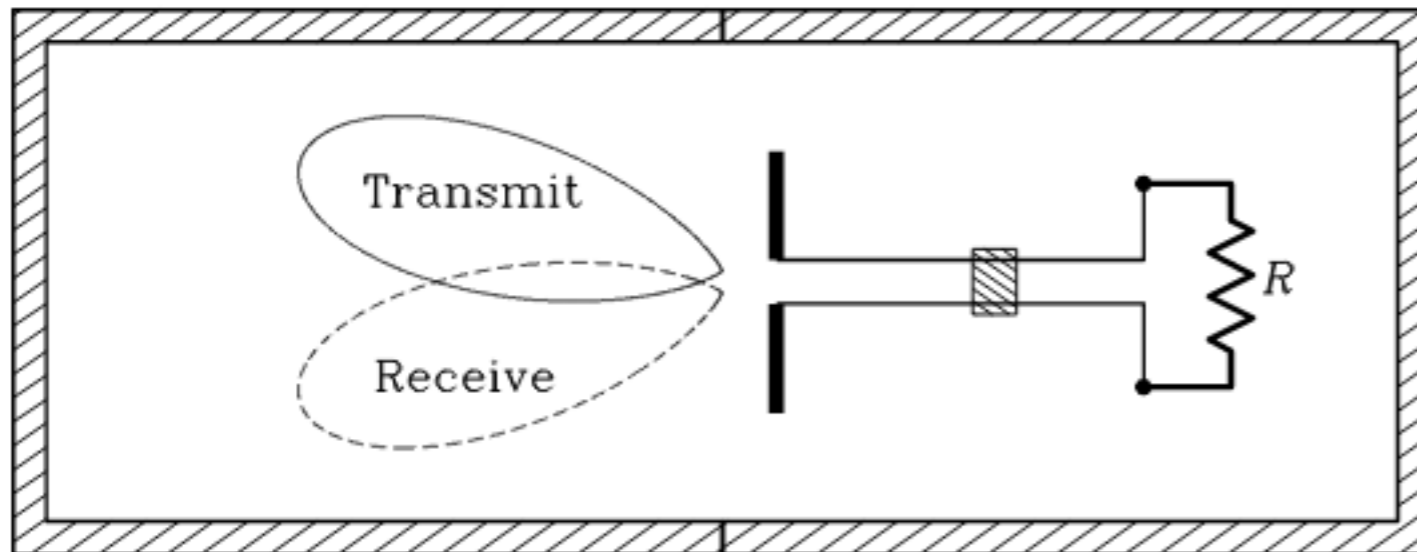

Antenna transmits power generated by the resistor R

Antenna receives power absorbed from cavity walls


Power in equals power out otherwise resistor temperature changes from T .

The power received and transmitted by the antenna **must be the same**, otherwise the cavity wall in directions where the transmitted power was greater than the received power would rise in temperature and the cavity wall in directions of lower transmitted/received power ratio would cool, leading to **a violation of the second law of thermodynamics**.

Interferometers developed at radio wavelengths


Wavelength of radio means that galaxies are barely resolved with single dish telescopes

Radio telescopes can record **AMPLITUDE** and **PHASE** of incoming radiation

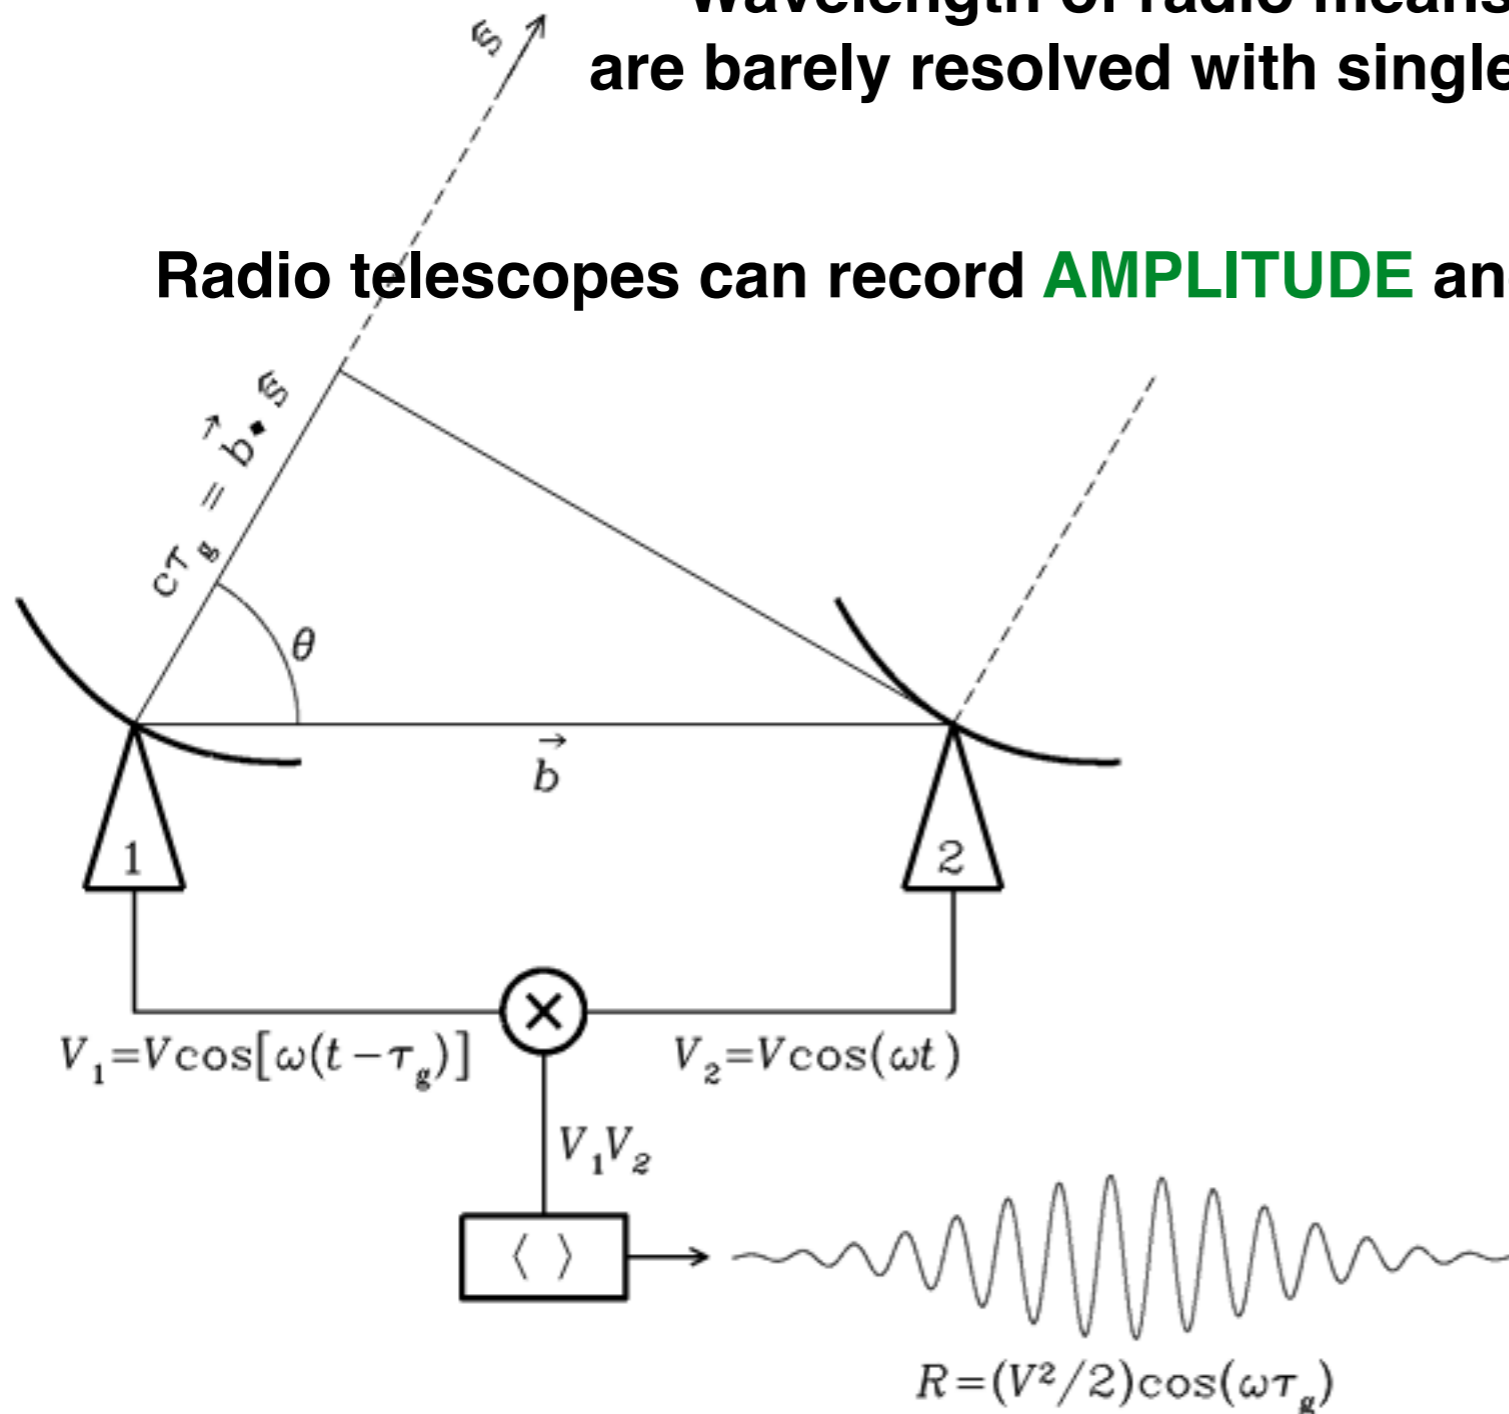

Interference


Two point interferometer fringes from a monochromatic point source

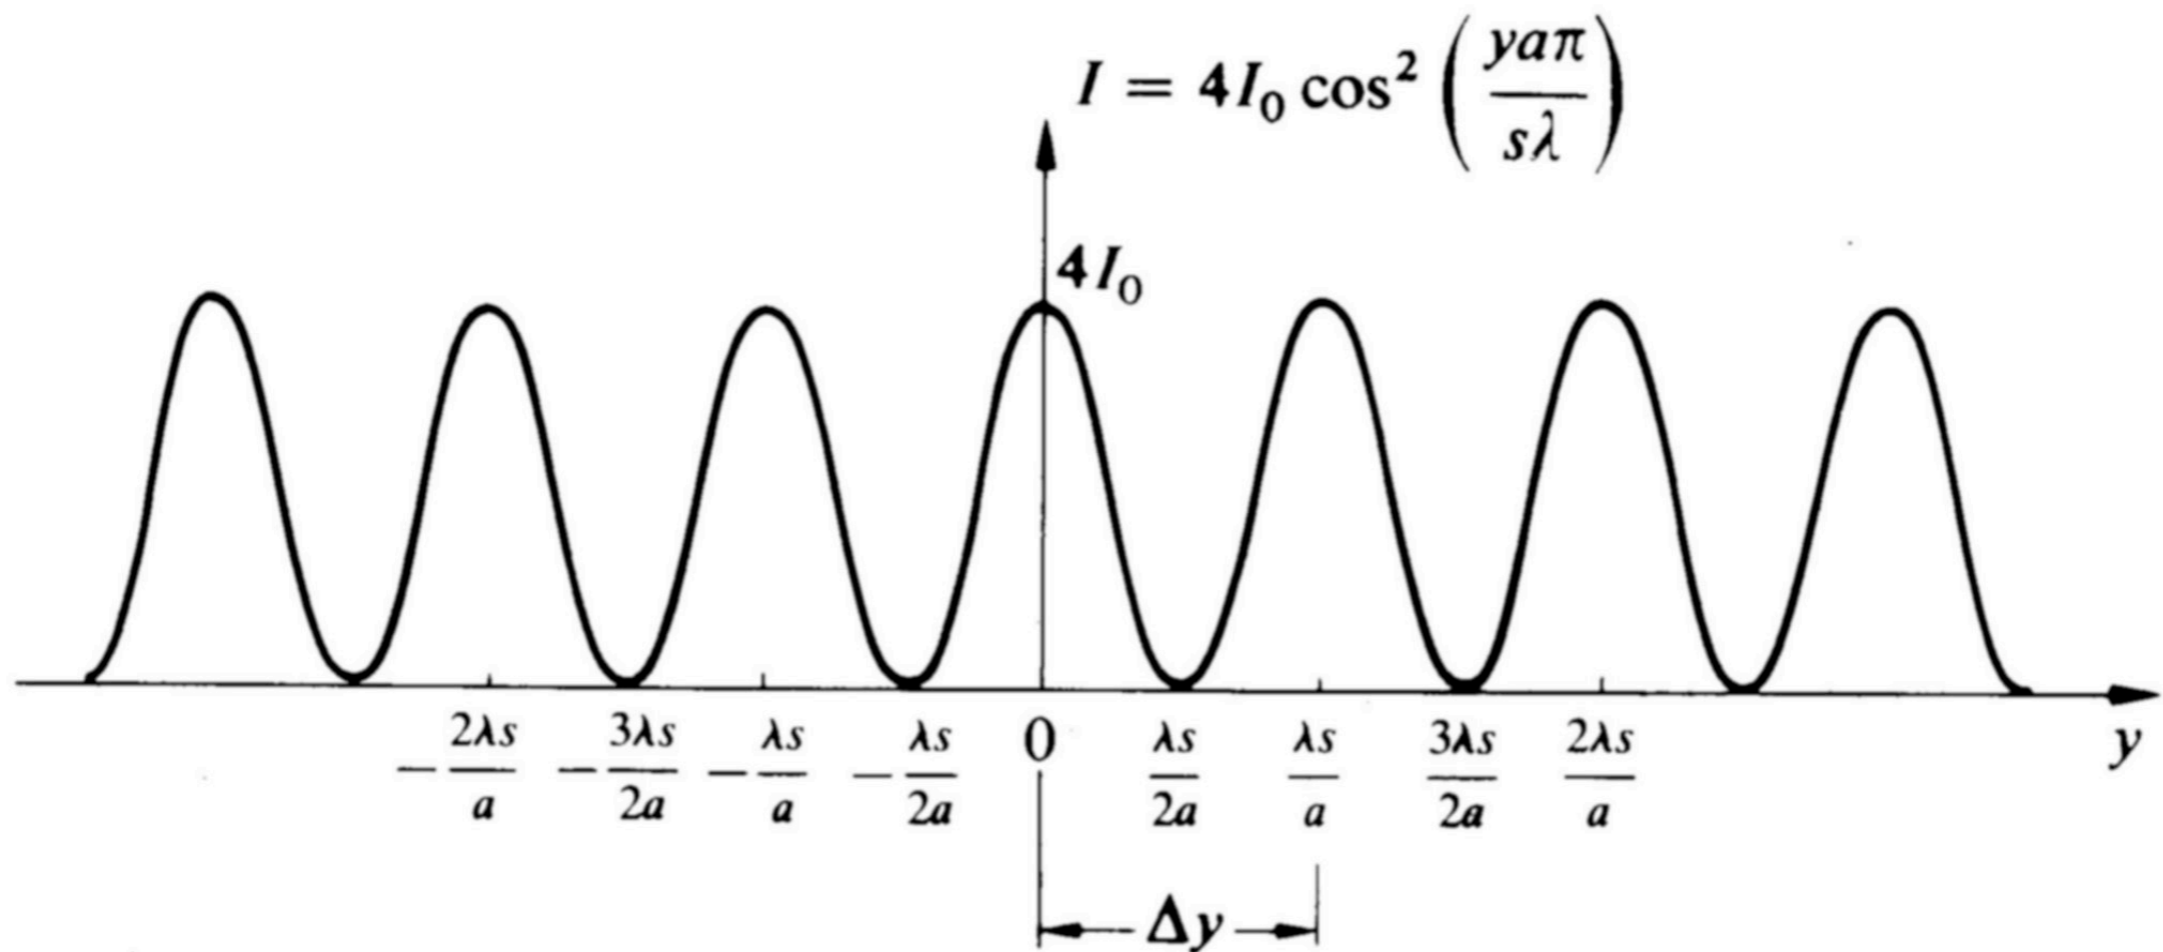

- λ Wavelength of observation
- s Distance to the observing plane
- y Coordinate perpendicular to fringes
- a Interferometer element spacing


The radiation pattern for an antenna is exactly equivalent to the PSF for a telescope

Dipole has transmission over 1 steradian

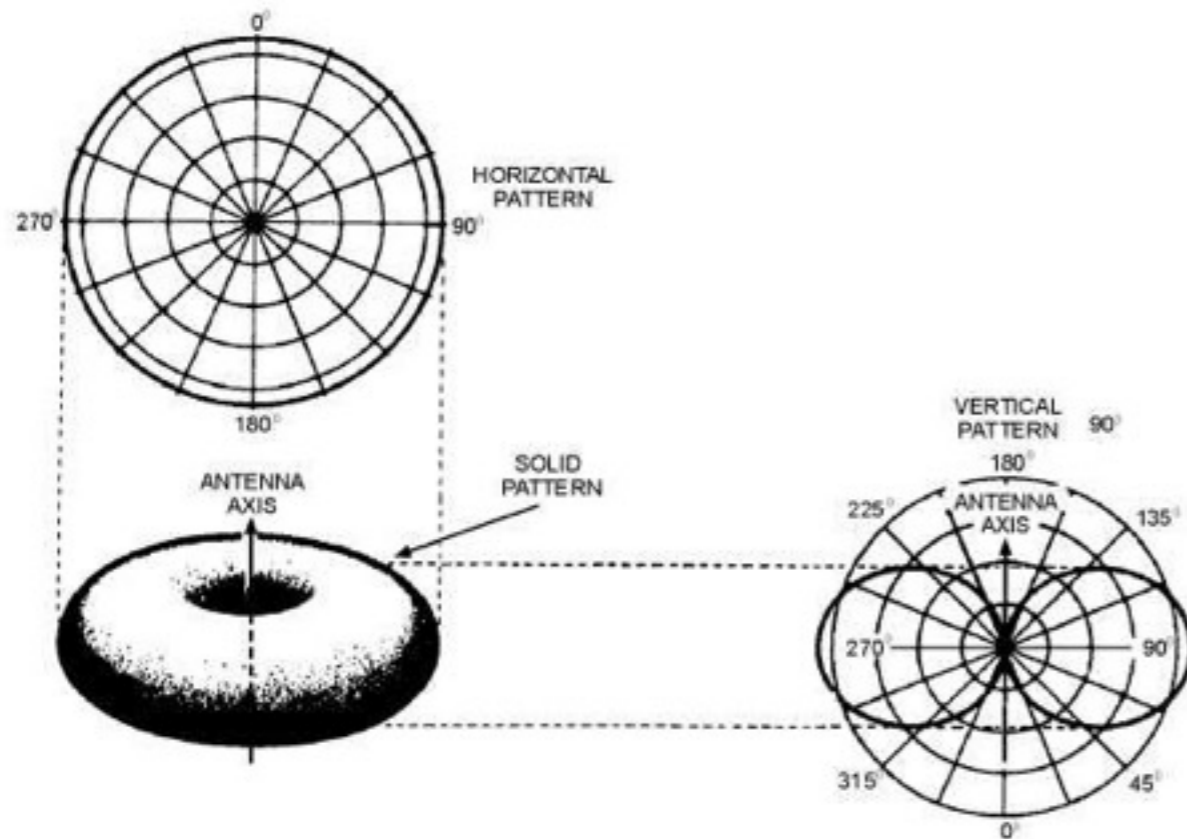

http://electriciantraining.tpub.com/14182/css/14182_186.htm

Radio telescope parabolic dishes give FWHM beam widths of few degrees

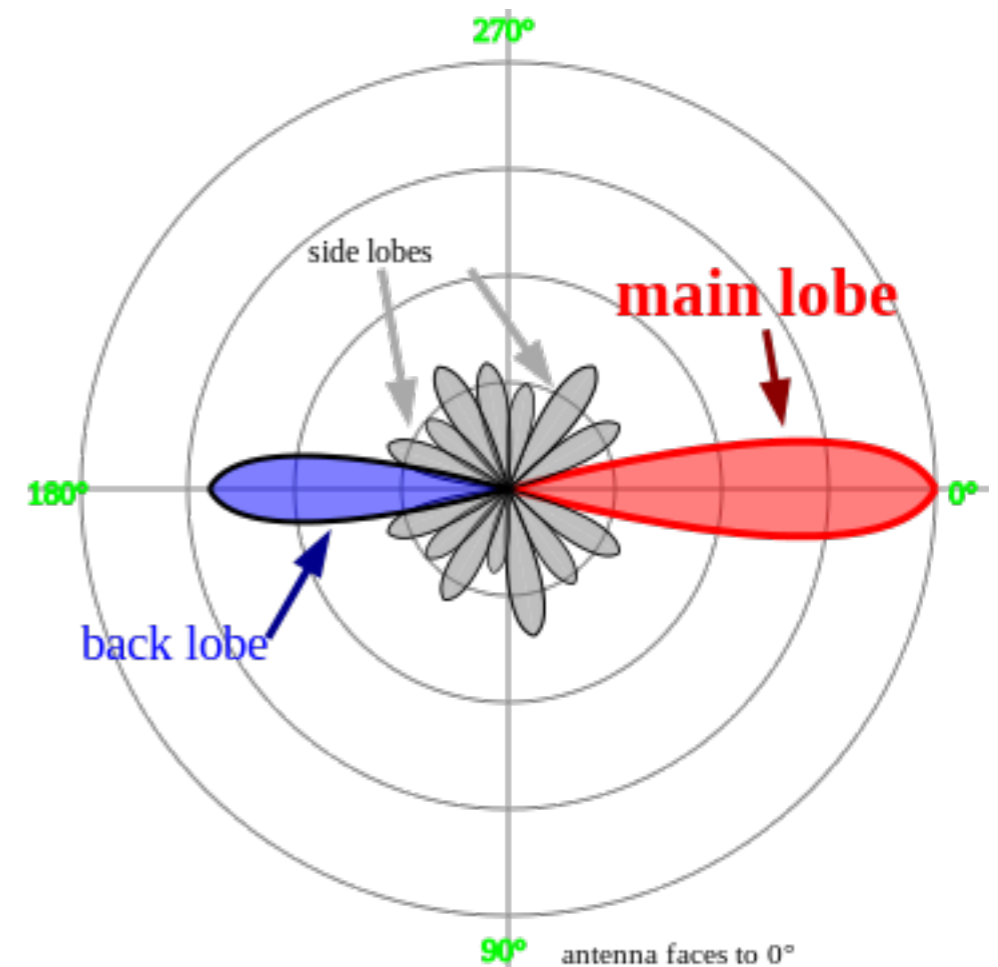


http://en.wikipedia.org/wiki/Radiation_pattern#mediaviewer/File:Sidelobes_en.svg

Reminder: single dish angular resolution


Single filled dish telescopes have angular resolutions of $\sim \frac{\lambda}{D}$

Imaging at optical on 10m telescopes ~ 10 mas

Pupil

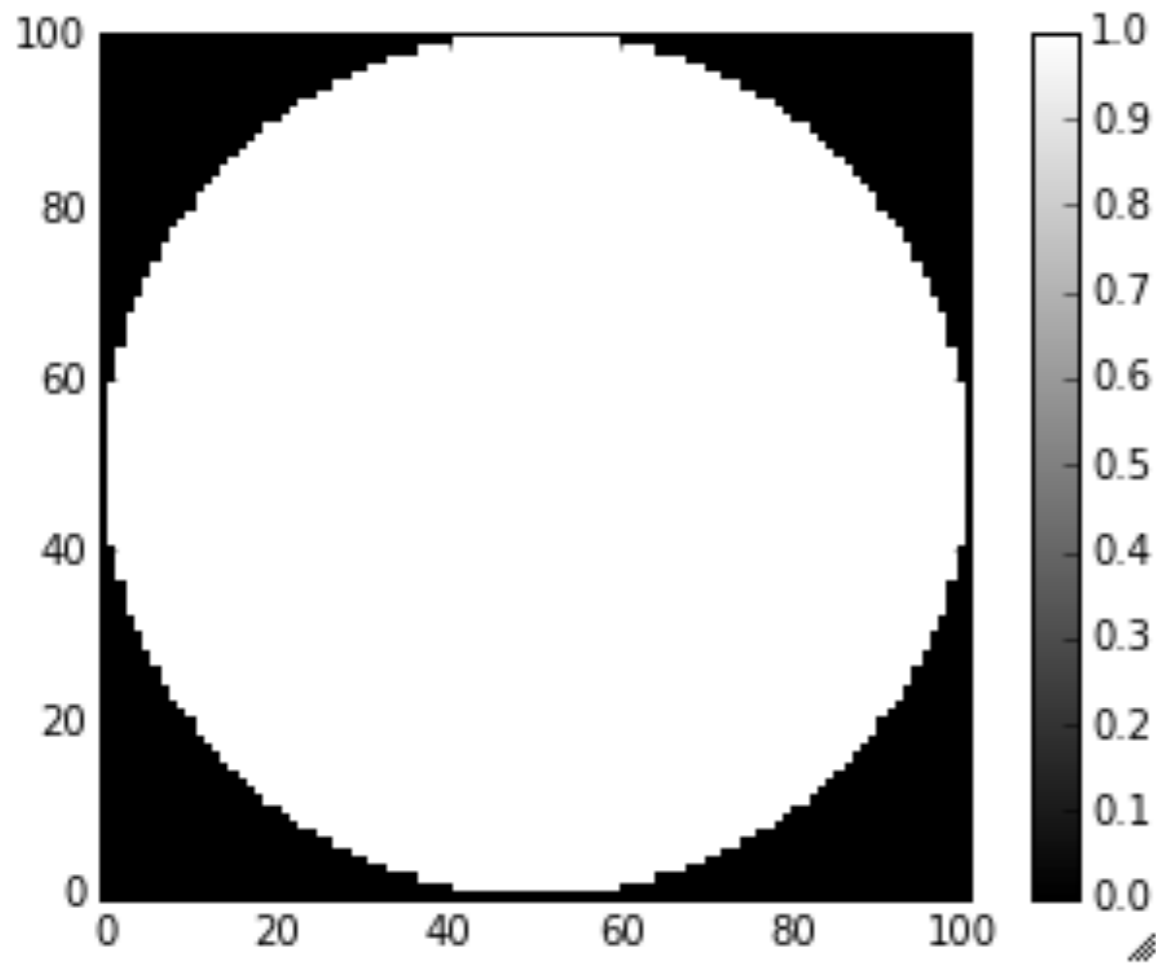



PSF

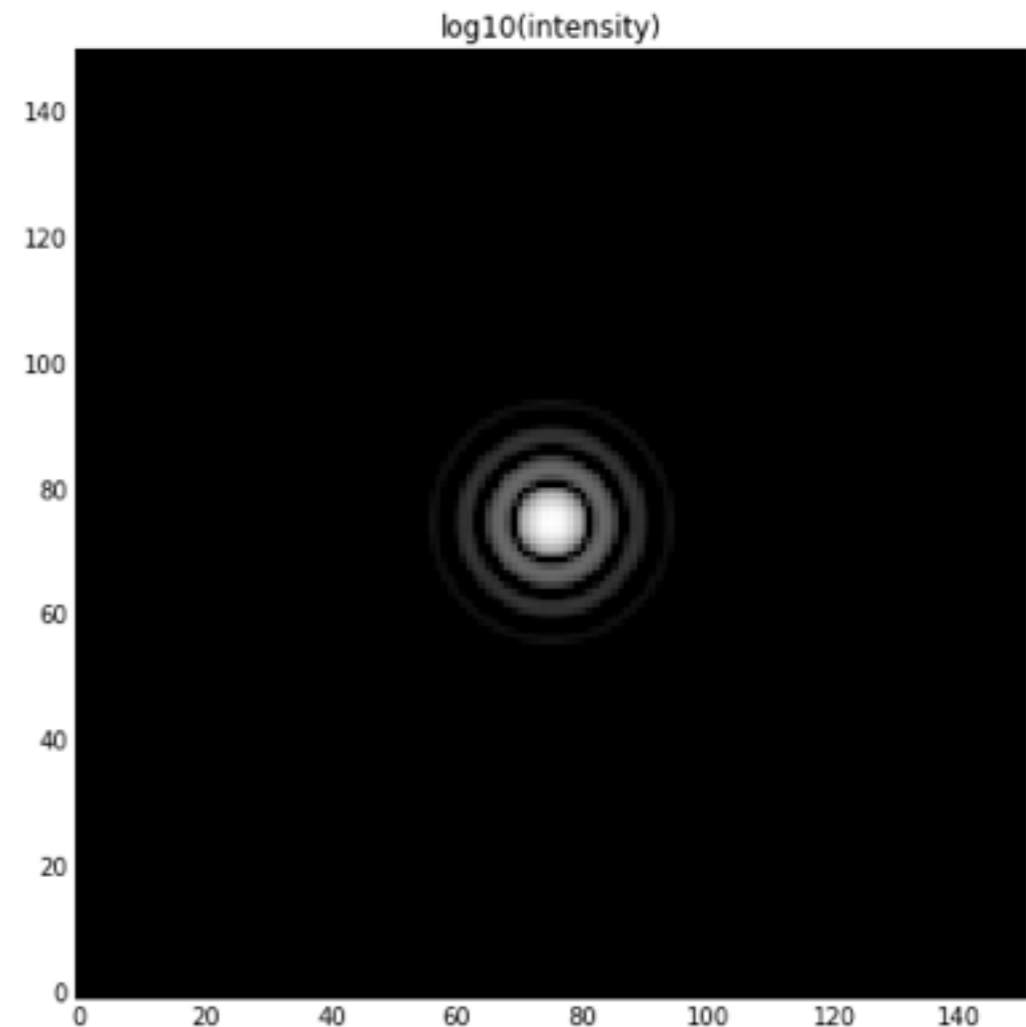


Higher angular resolution with multiple telescopes

A sparsely filled aperture of diameter D has the same angular resolution but total flux is lower and PSF has power removed from the Airy core

Individual apertures of diameter d lead to first minimum of λ/d

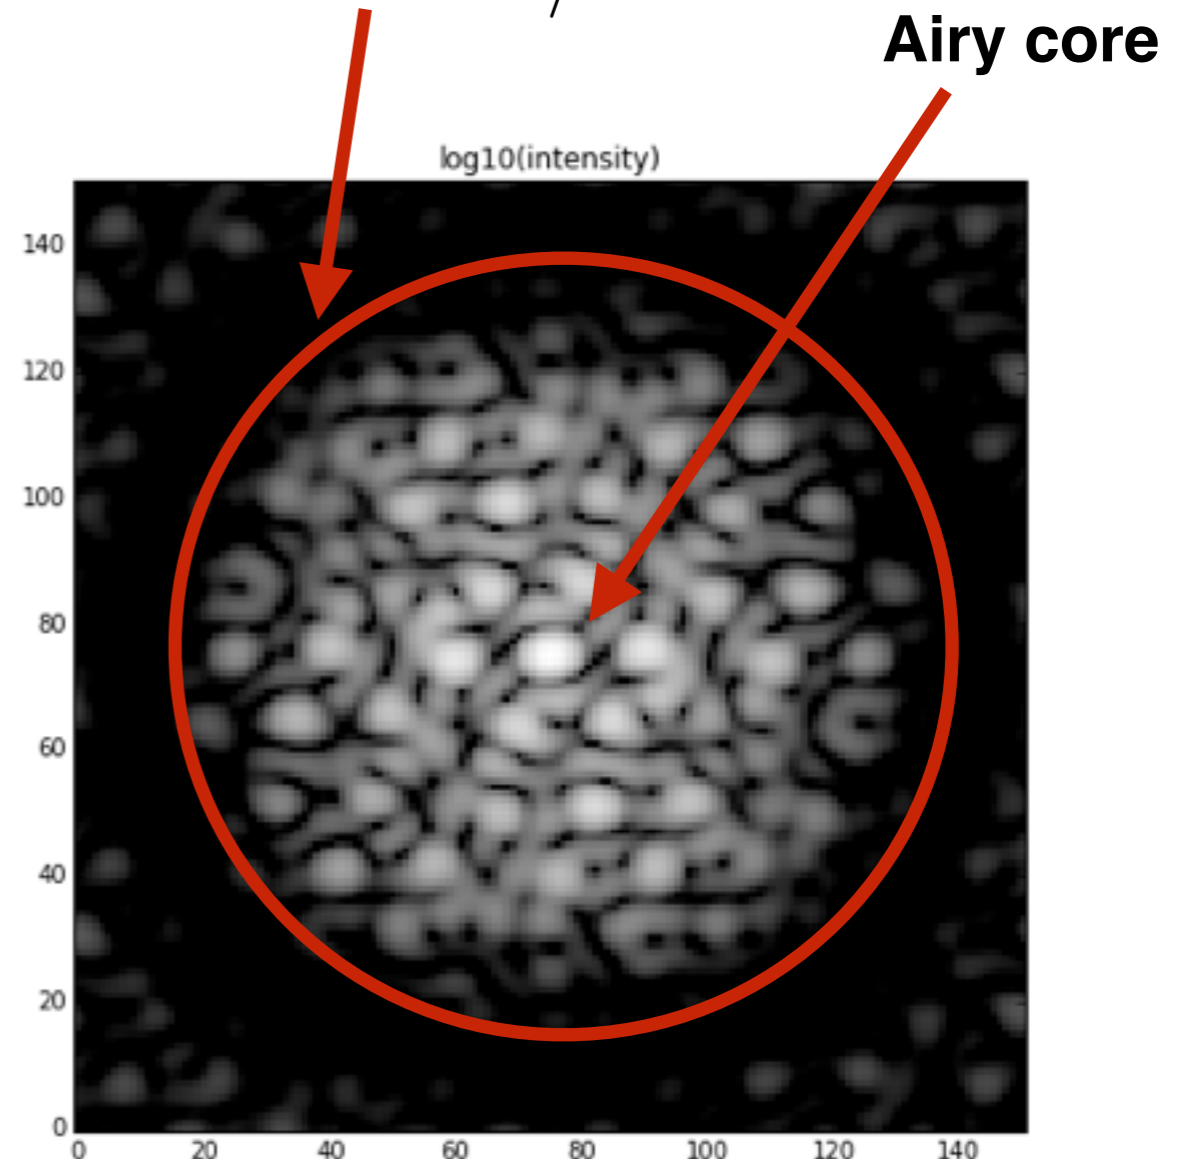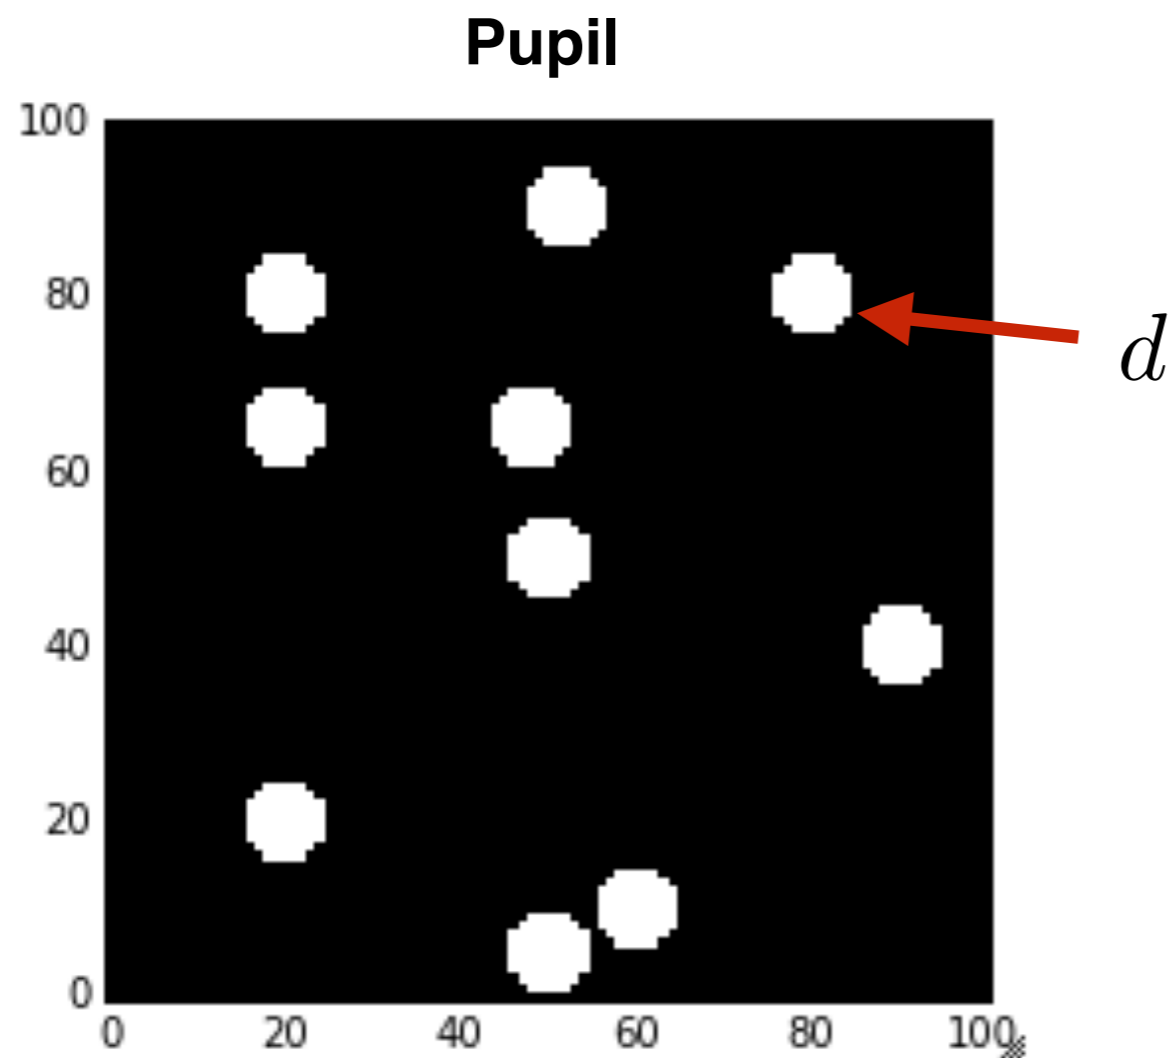

VLA point spread function

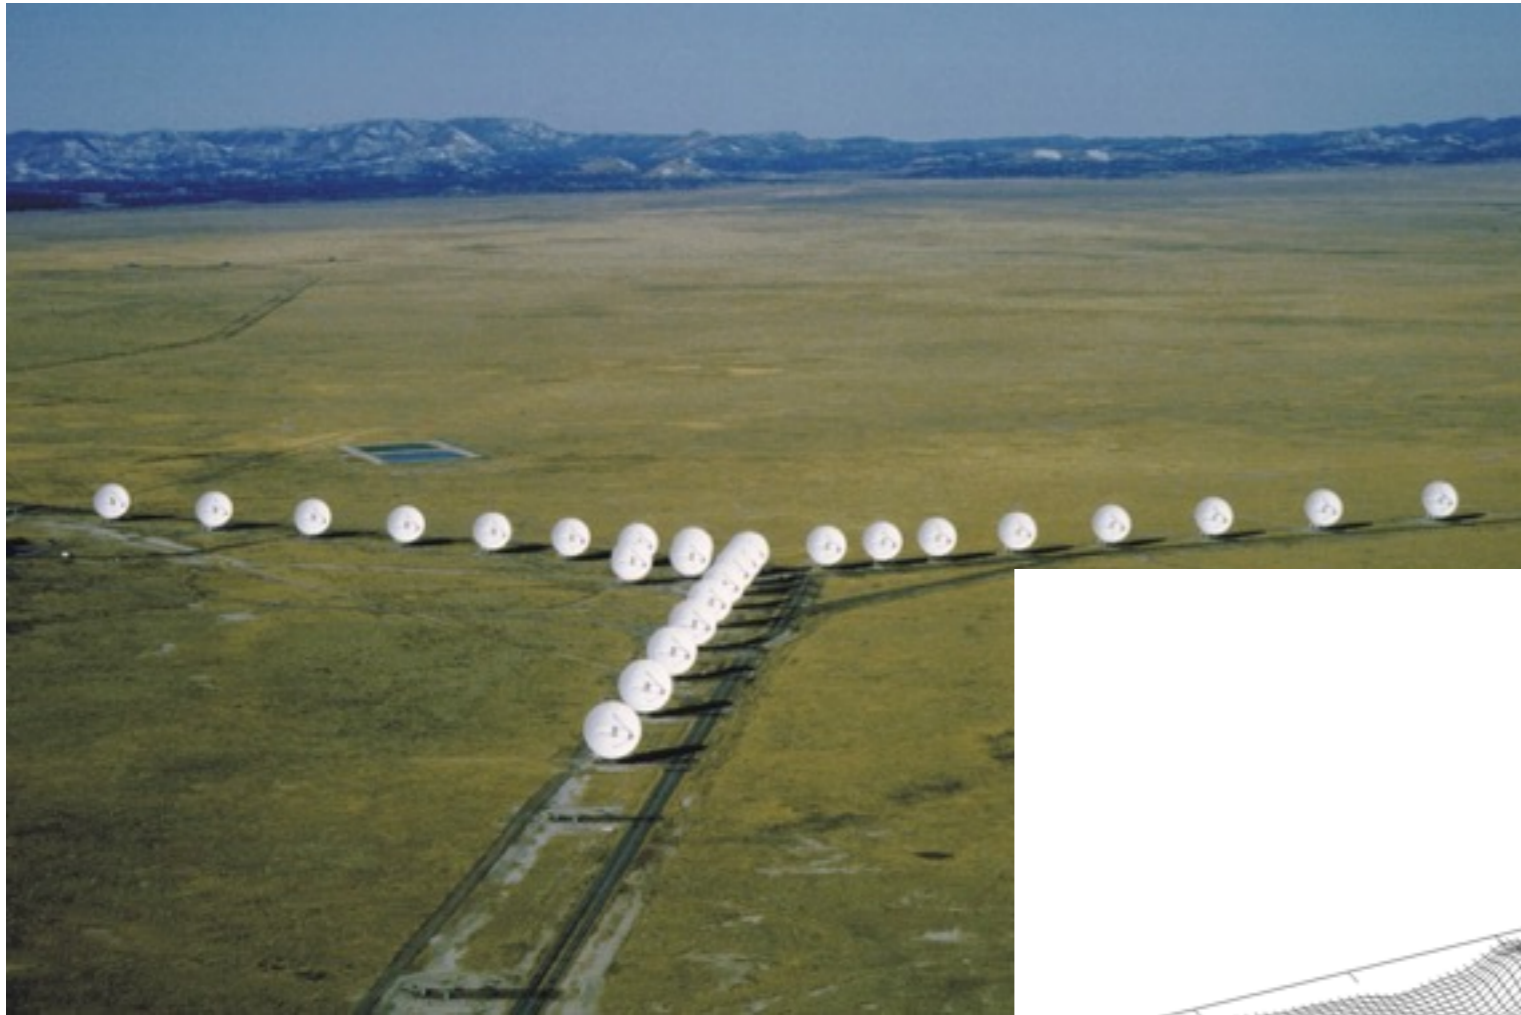

The PSF of the VLA radio telescope.

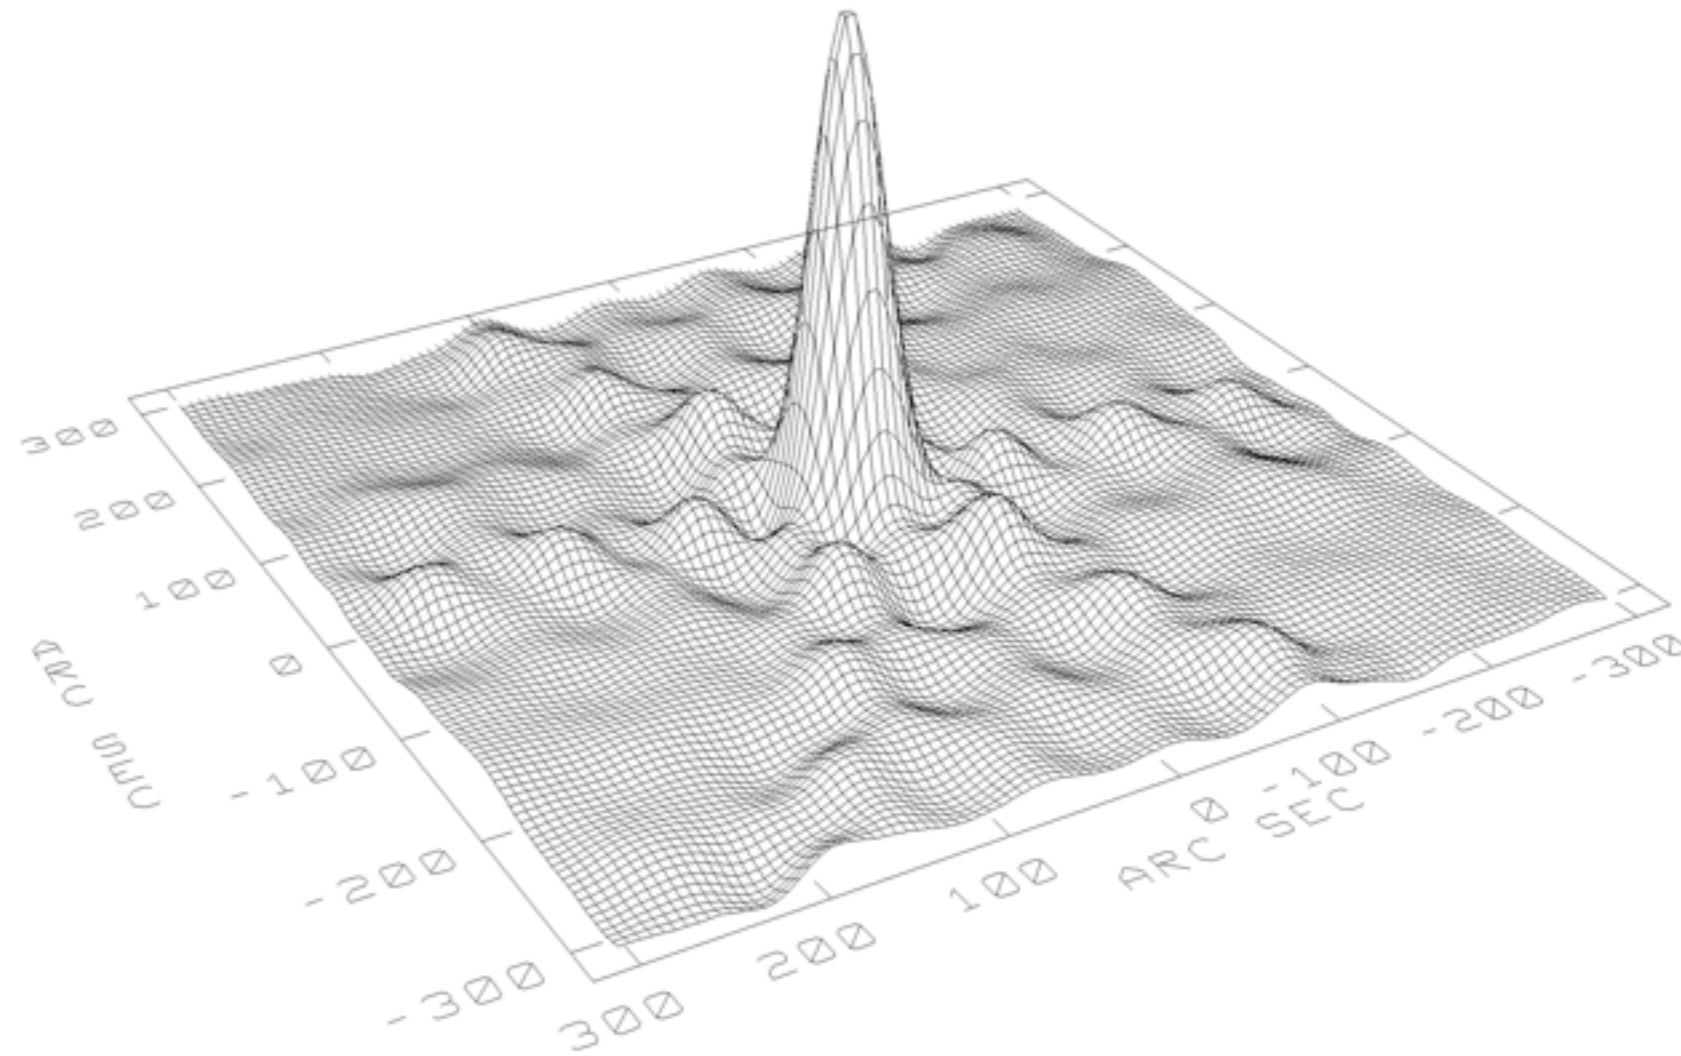


Image of M51 with LOFAR




$$\lambda = 2 \text{ m}$$

LOFAR Superterp, Exloo, Netherlands

LOFAR array consists of thousands of radio antennae over large baselines

Image of M51 with LOFAR

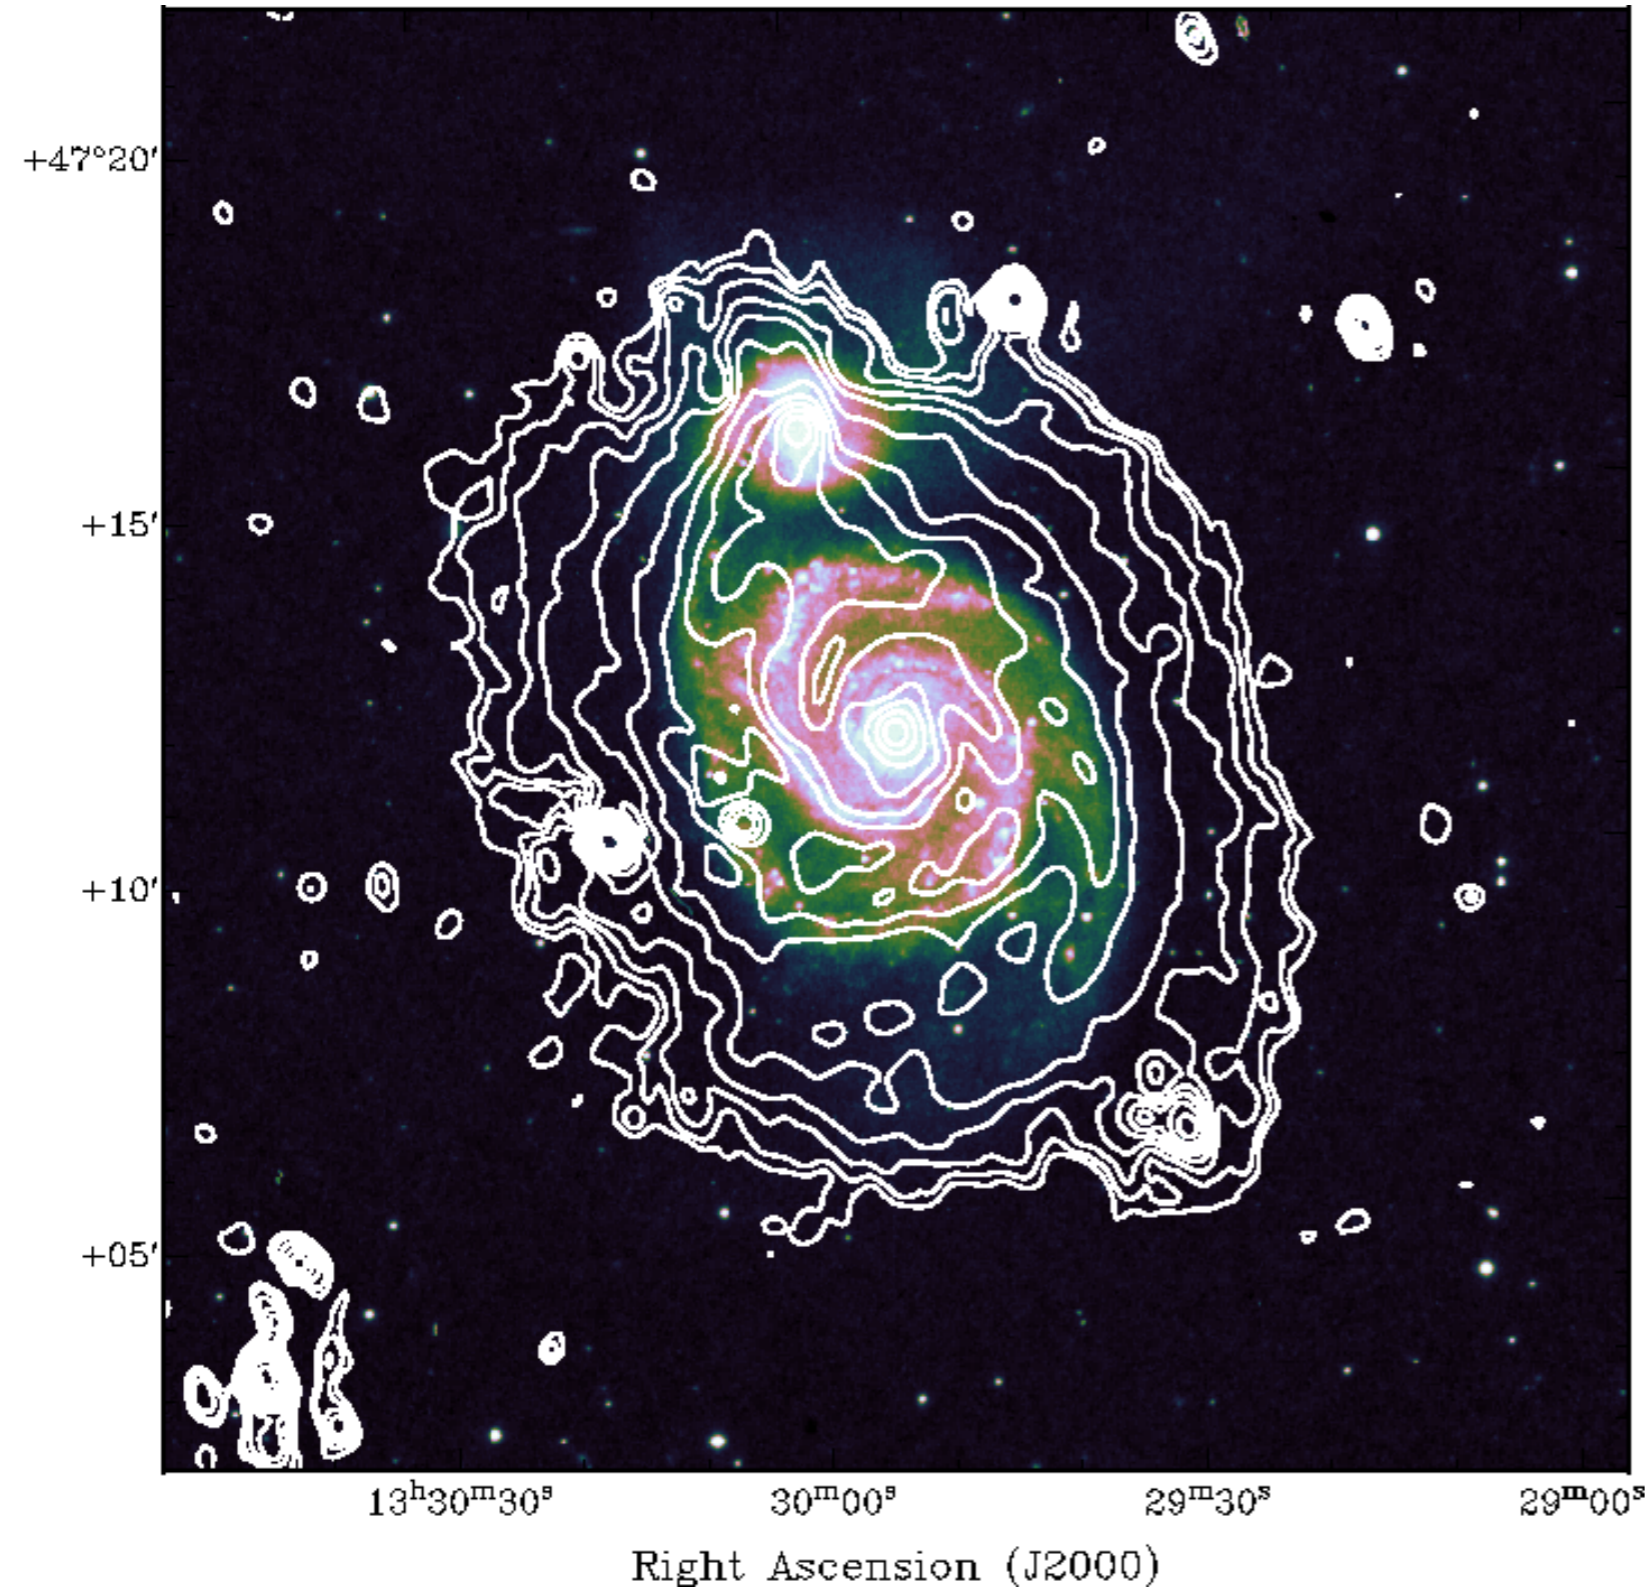

$$\lambda = 2 \text{ m}$$


$$\theta_{diff} = 20''$$

$$D \sim 20 \text{ km}$$


**LOFAR array coherently combines
antennae scattered over
many kilometres**

Mulcahy 2014 A&A


One pair of telescopes makes a set of fringes projected on the sky

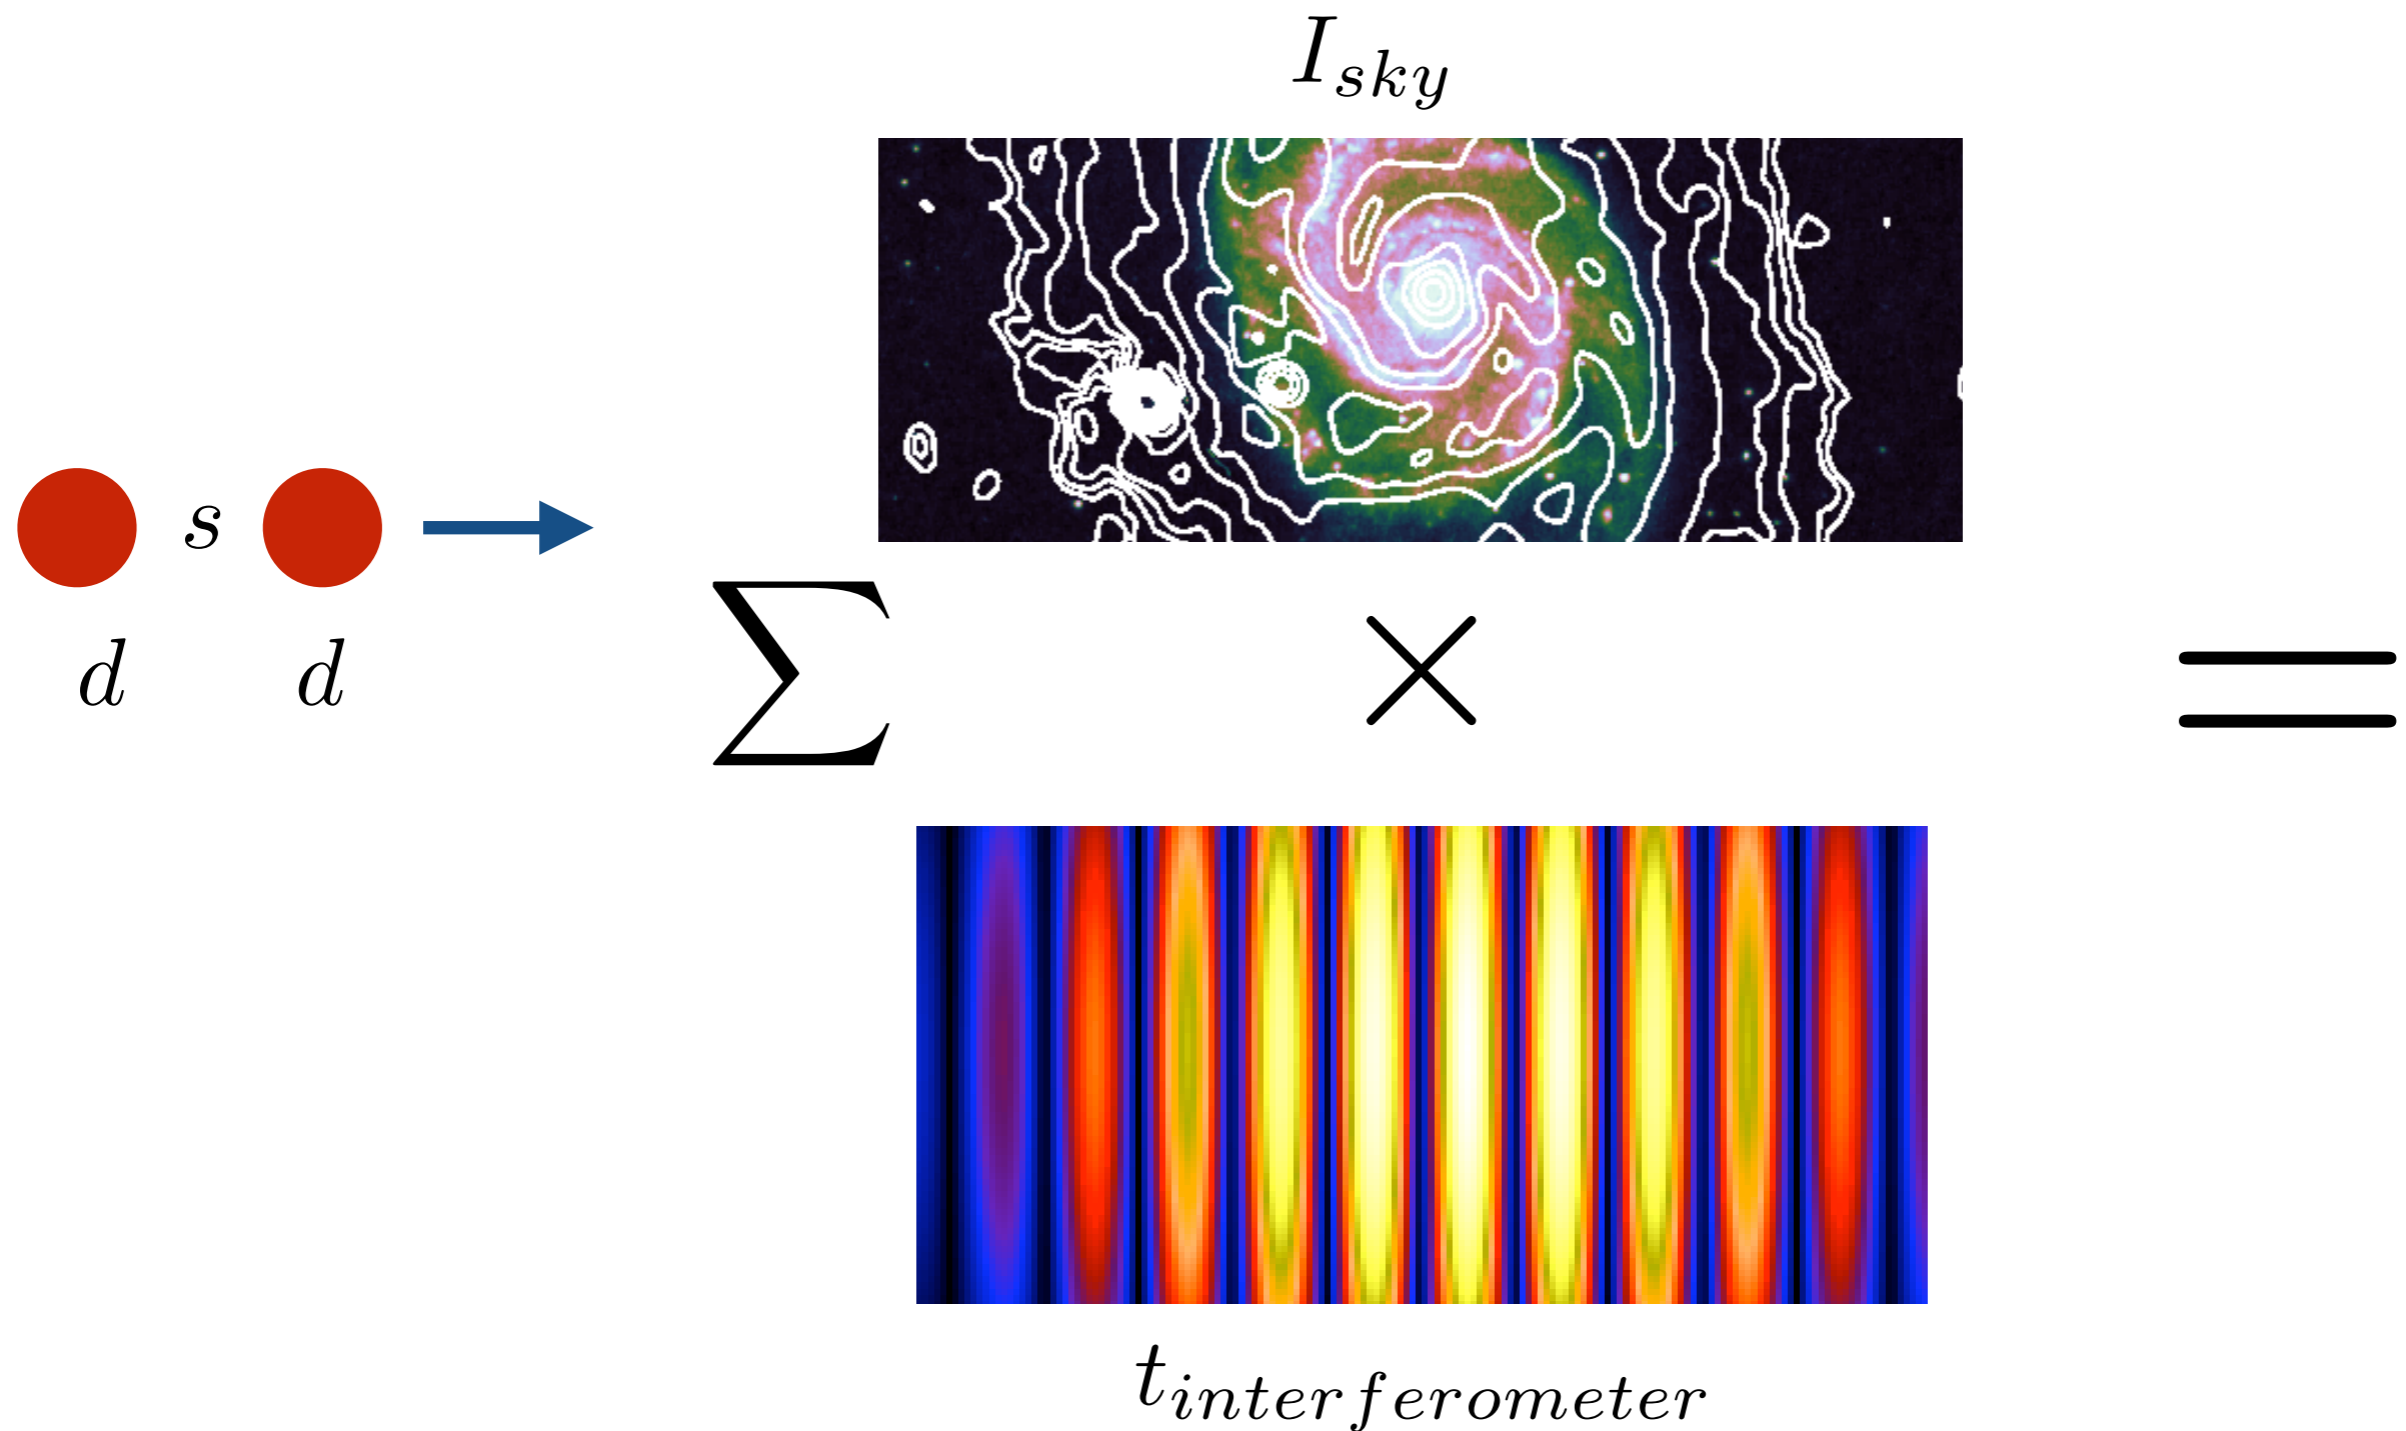



One pair of telescopes samples one point in the $u - v$ spatial frequency plane

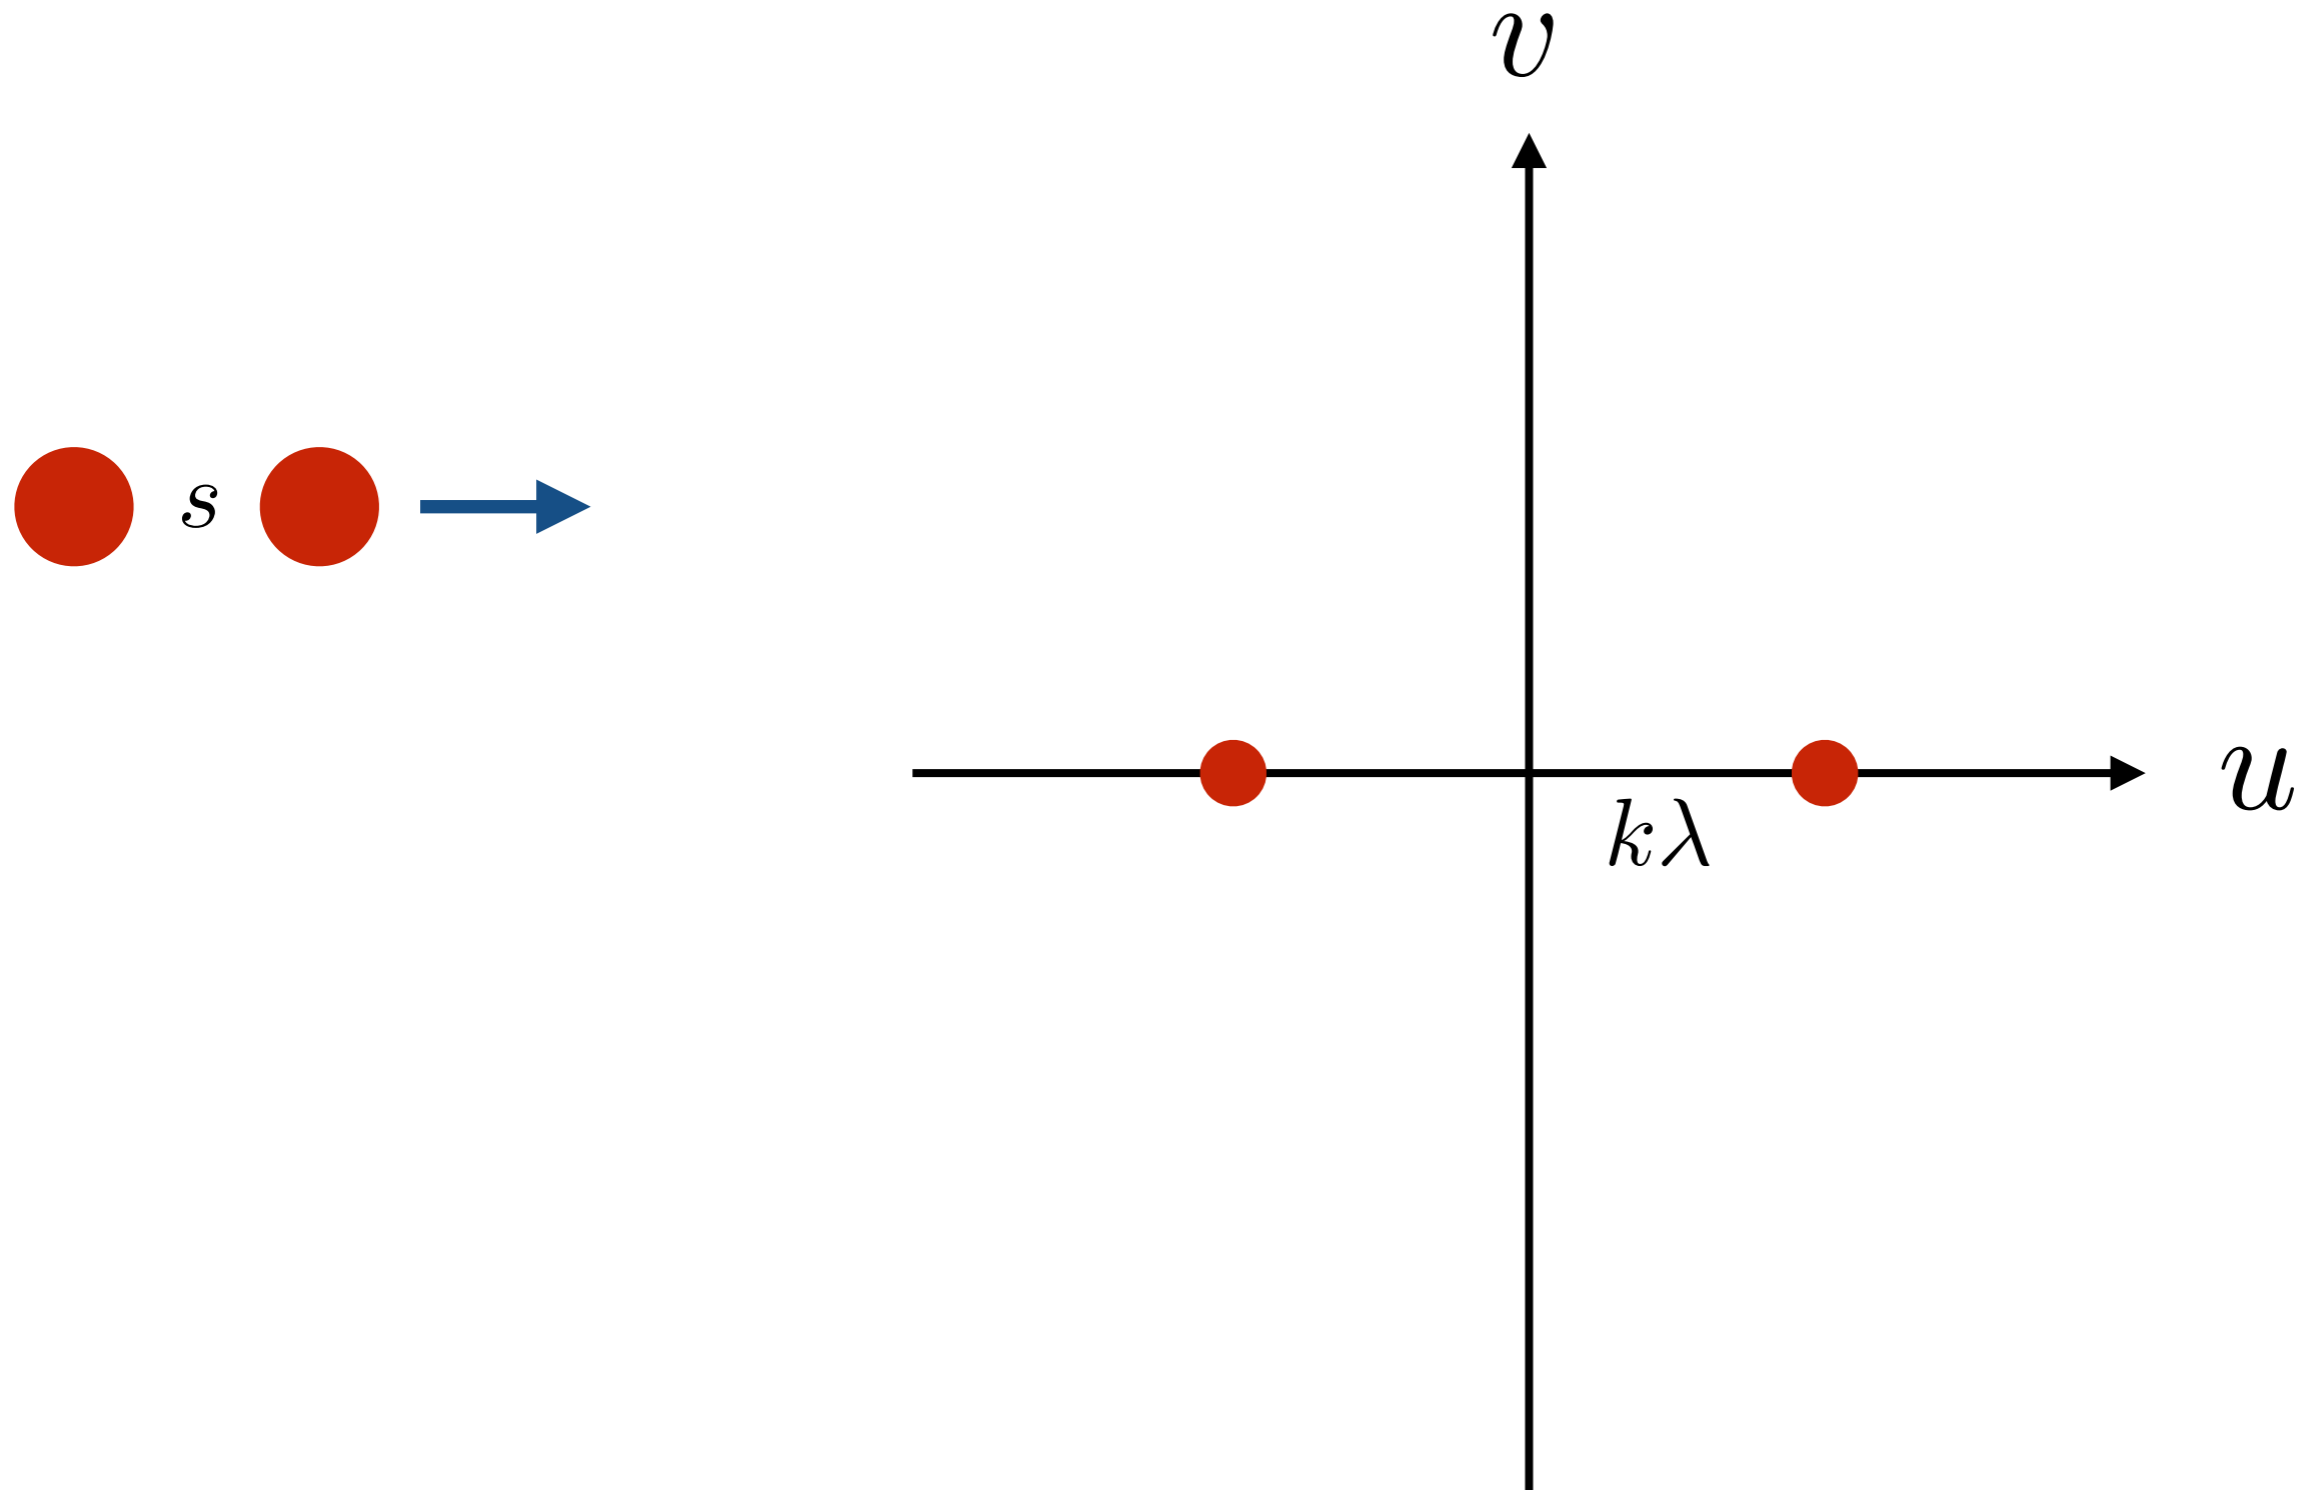

Adding one more telescope adds many more points in the $u - v$ plane

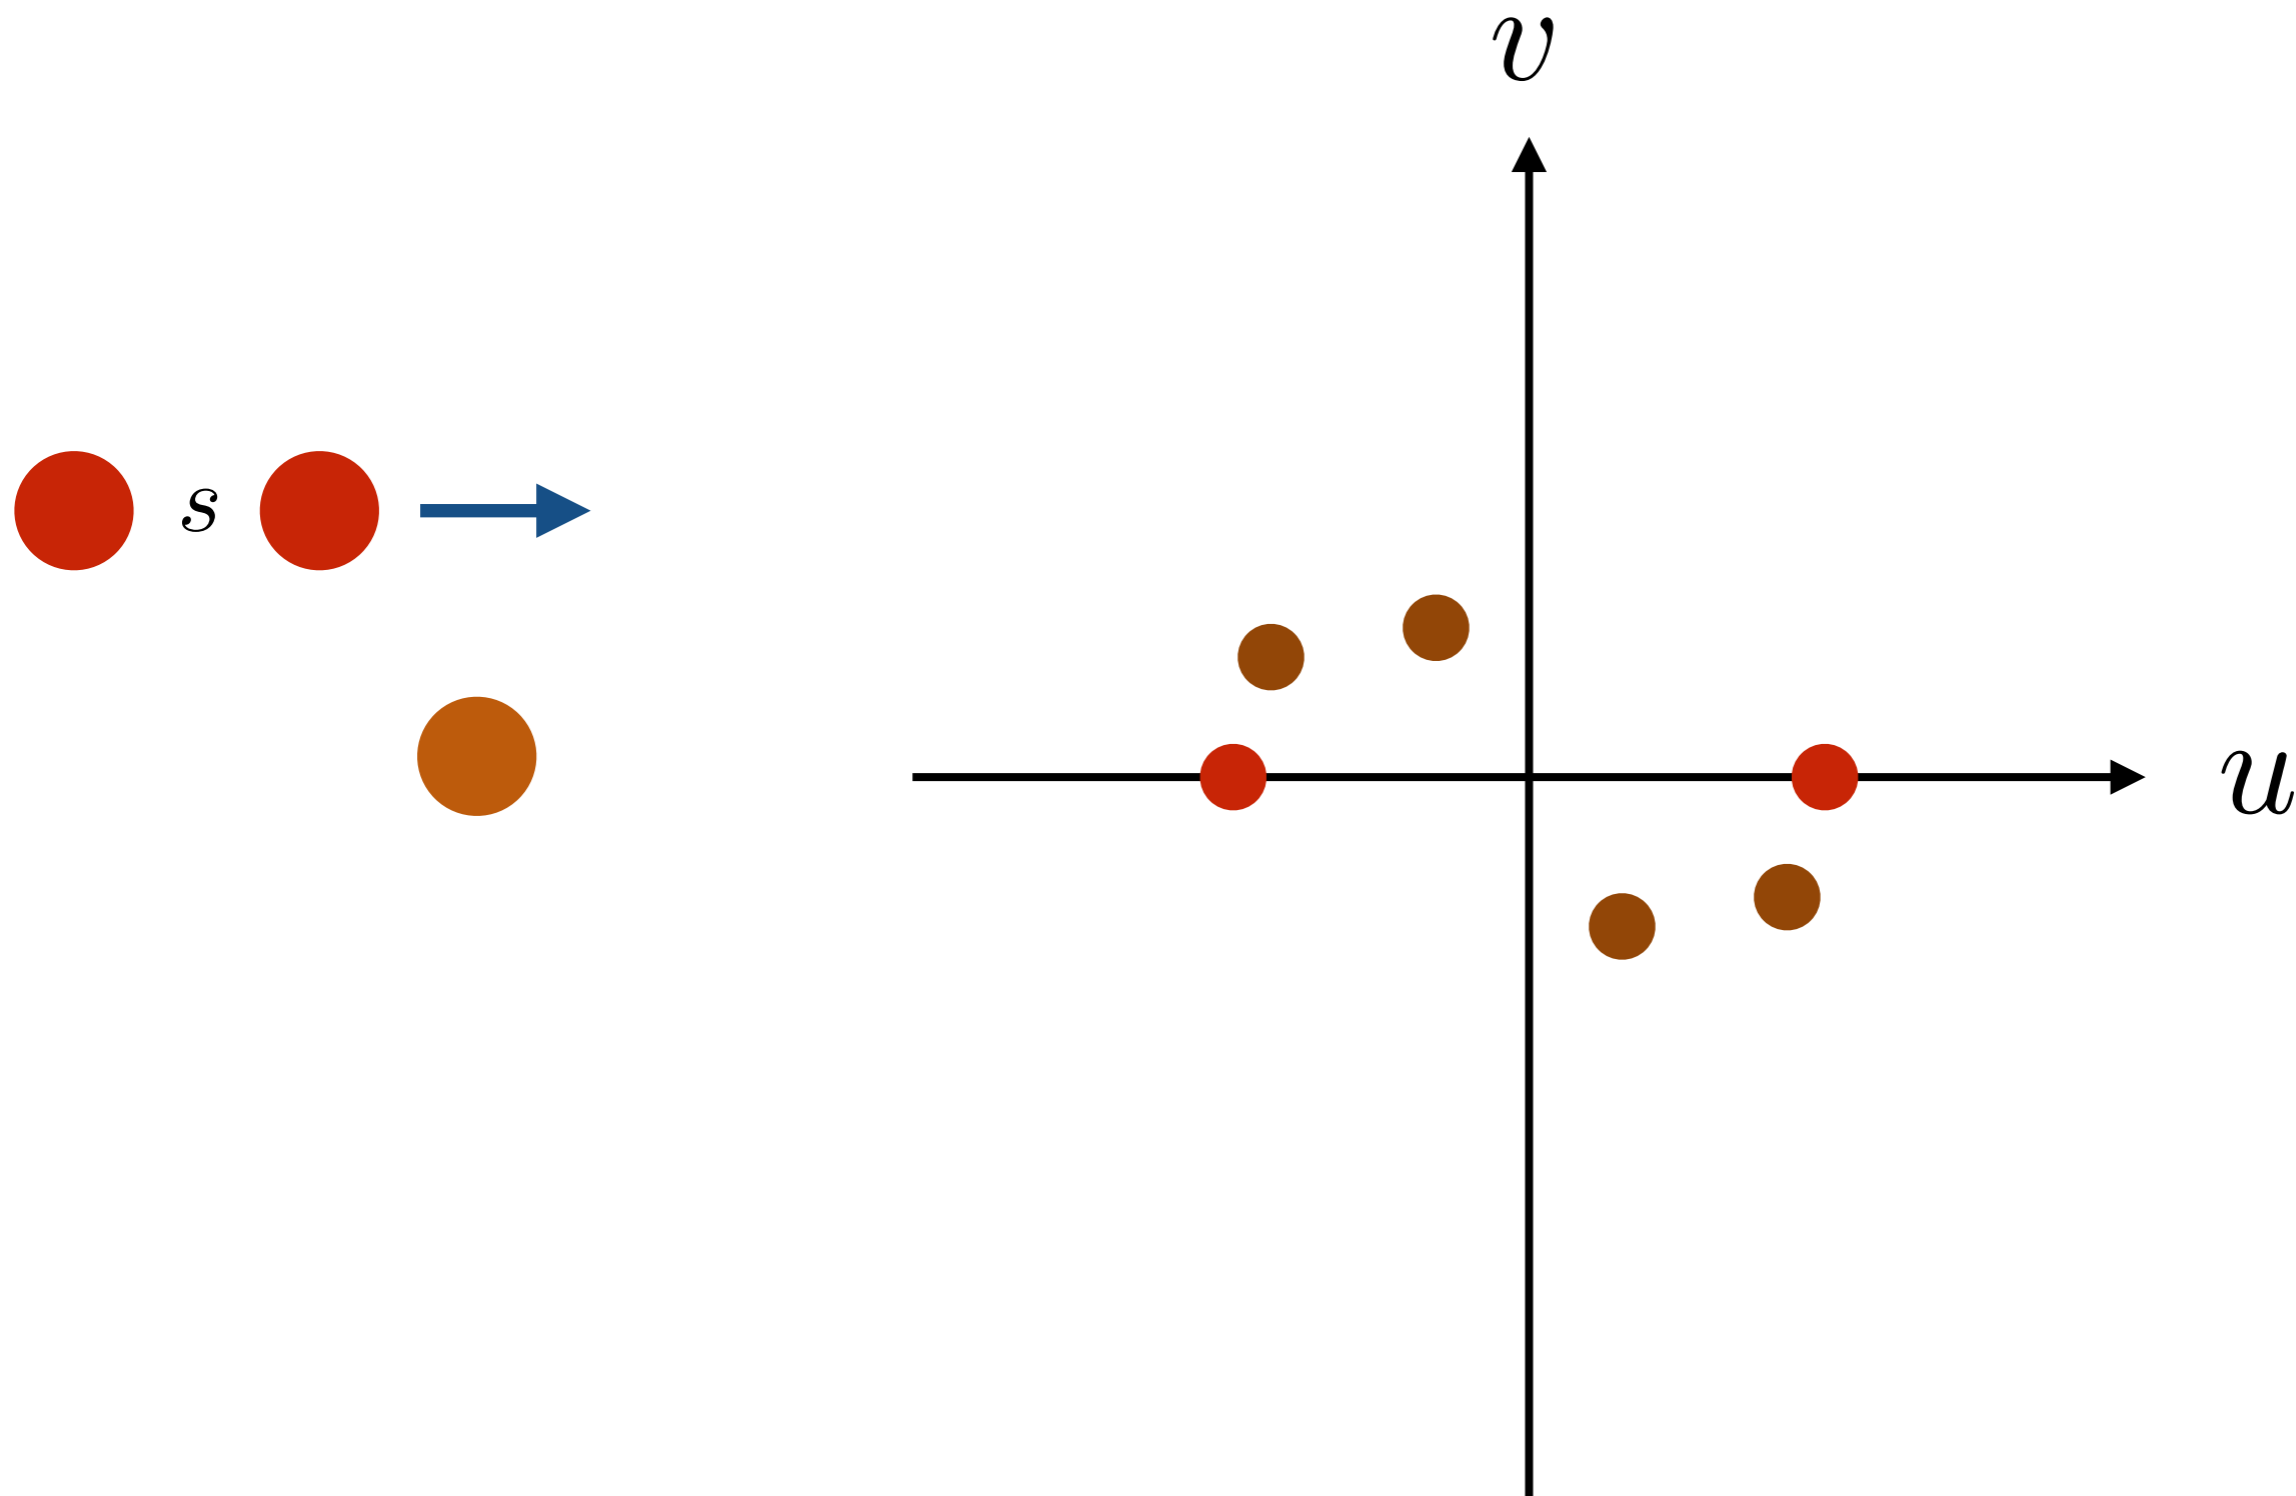


...but if you duplicate a baseline, you are wasting your resources

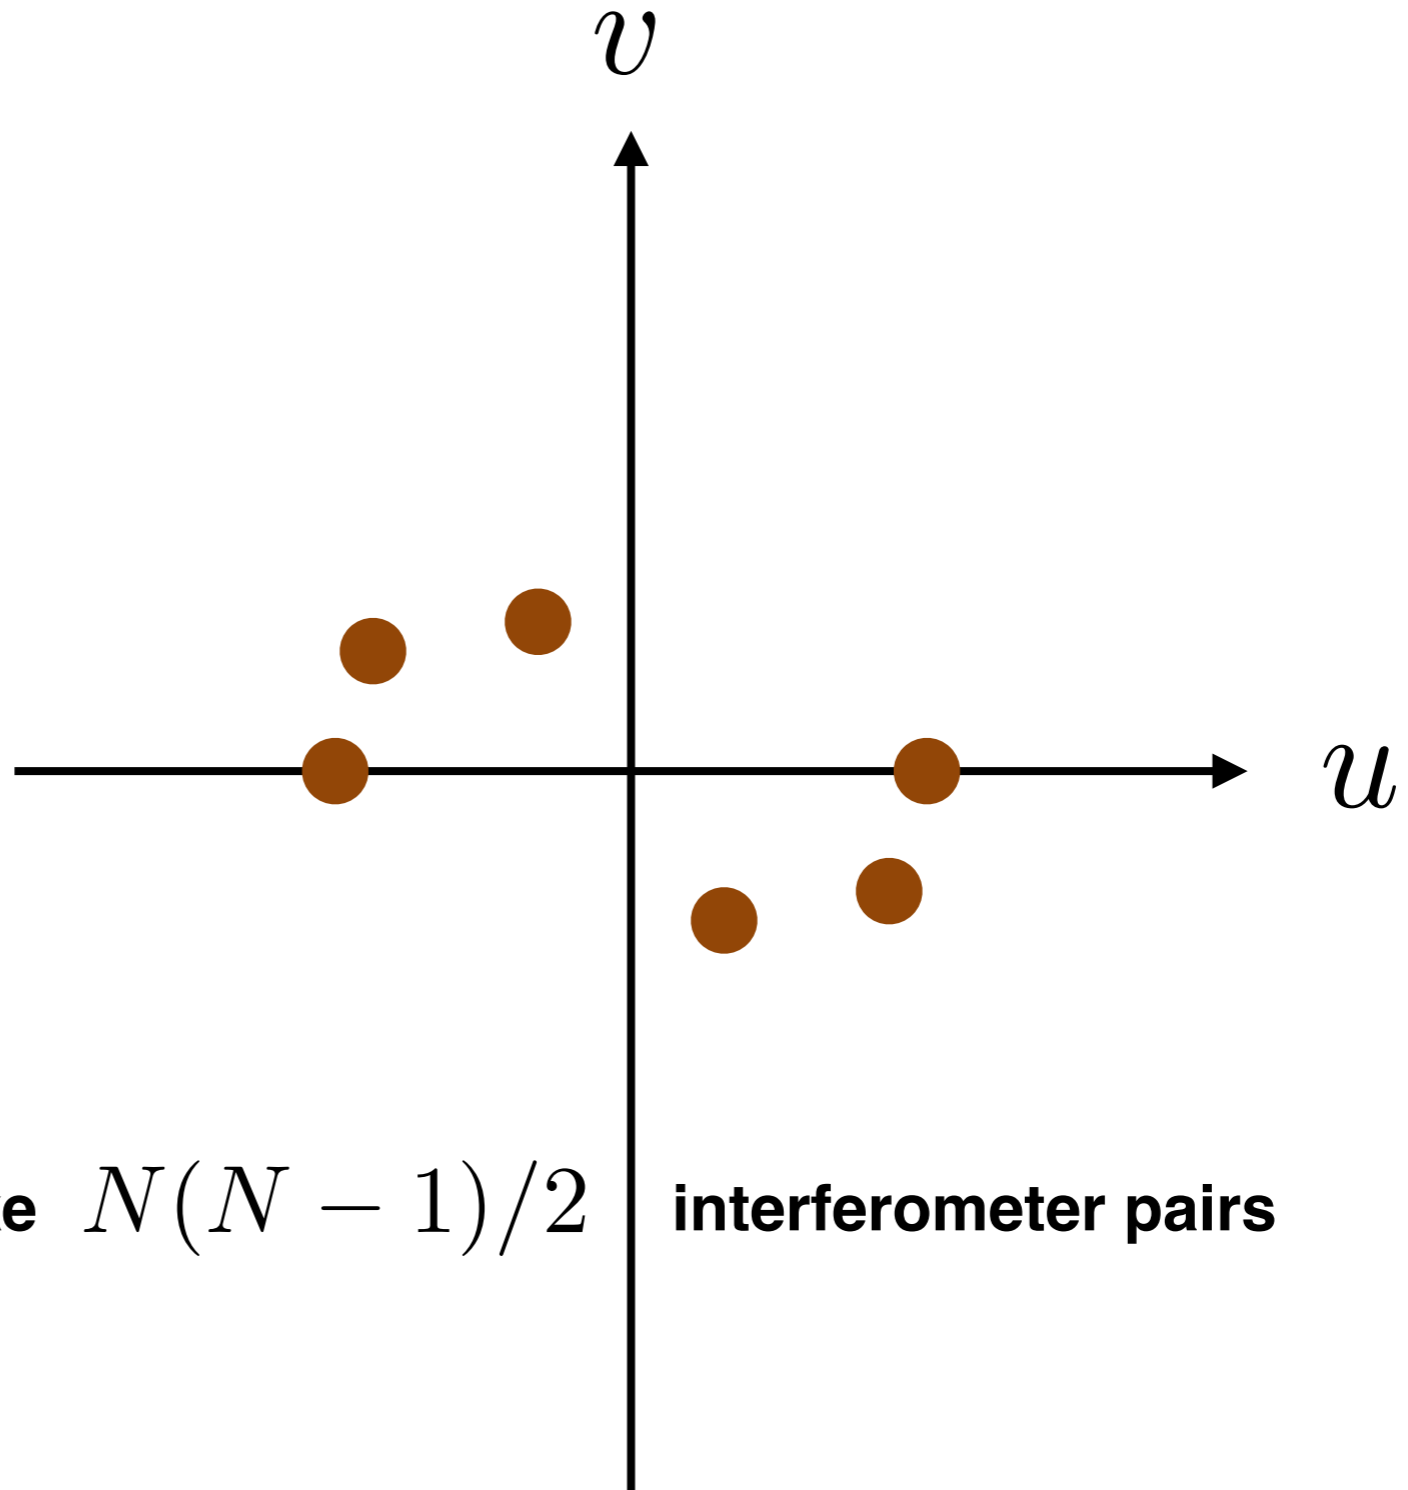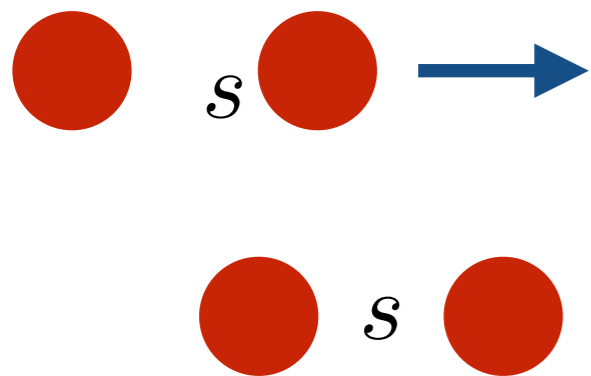




N telescopes make $N(N - 1)/2$ interferometer pairs

You put your telescopes in a non-redundant pattern so that you sample the uv plane equally

Telescopes on ground

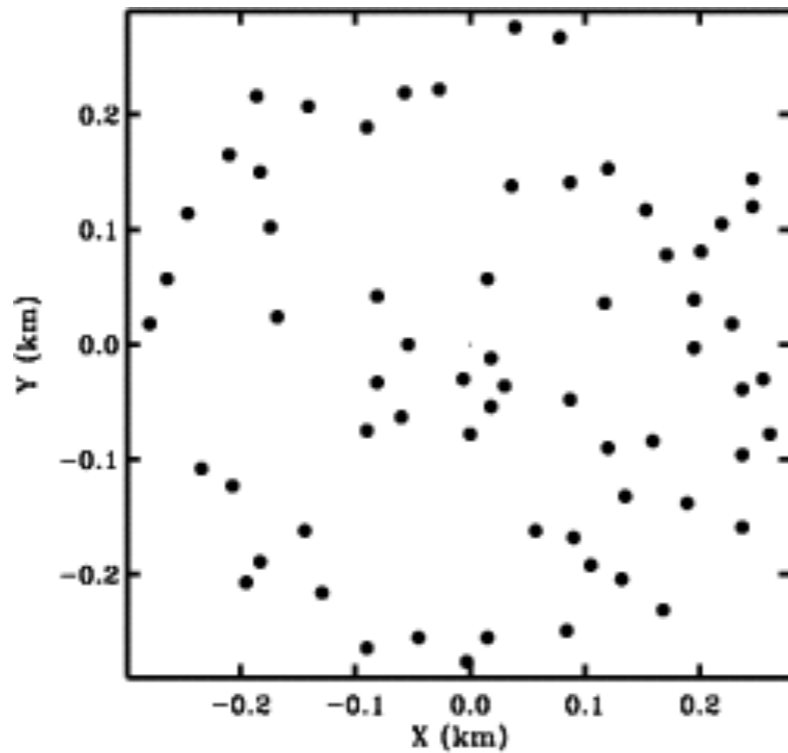

u-v distribution

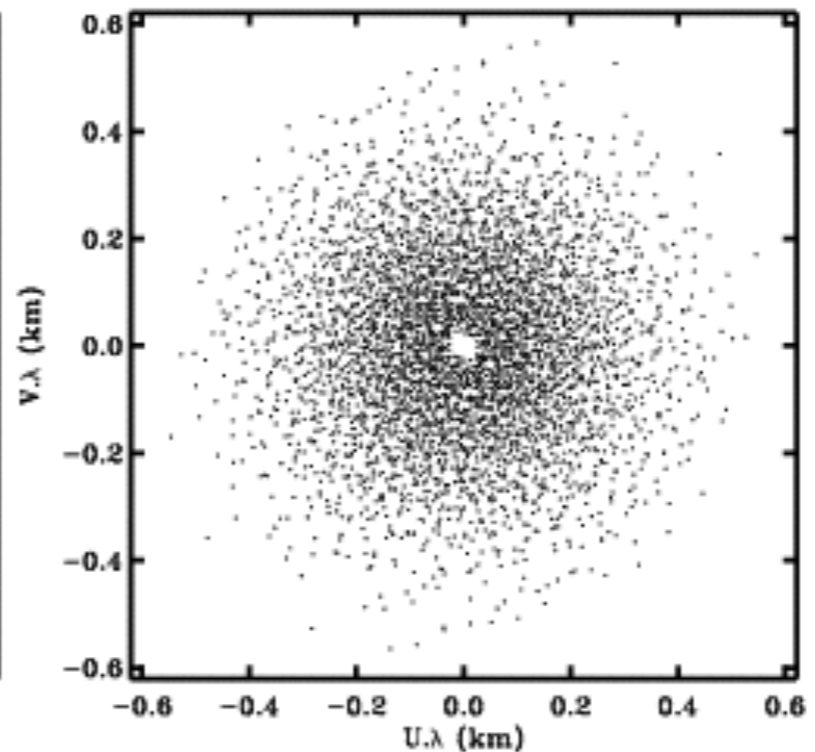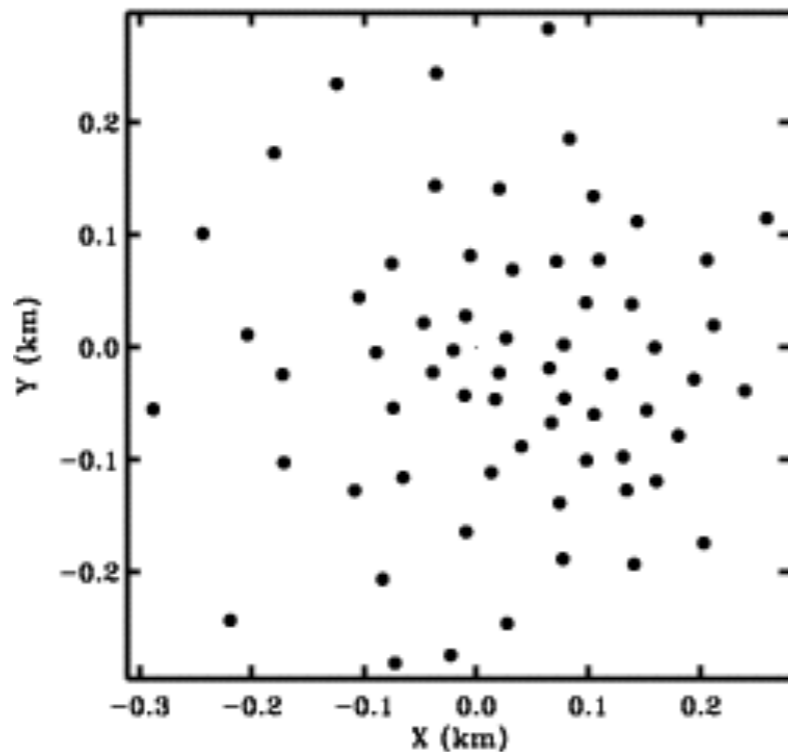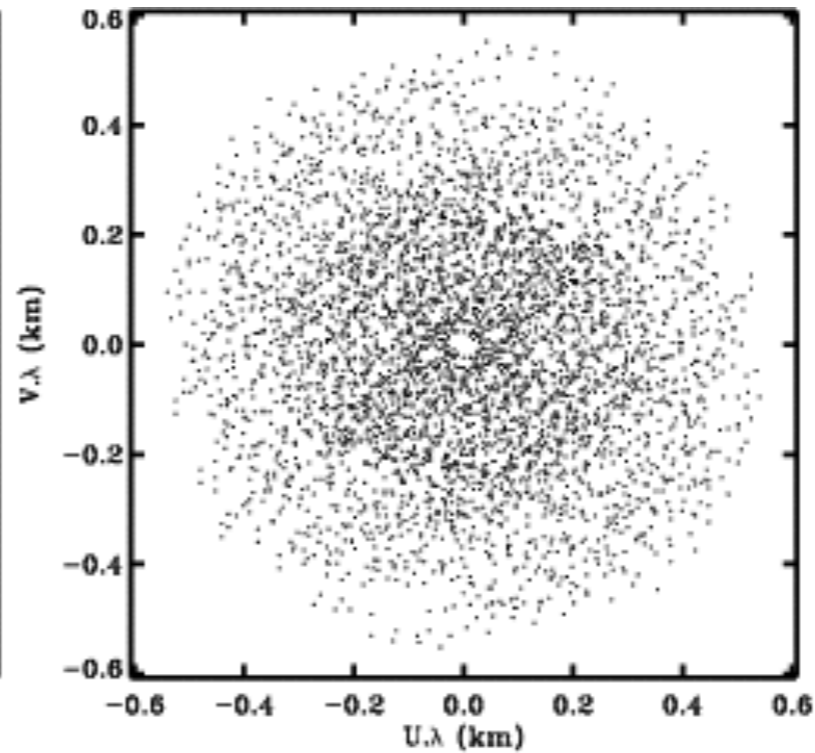

PSF and OTF (Optical Transfer Function)

We know that the image of a point source gives the Point Source Function (PSF):

$$PSF = |FT(A)|^2$$

where A is the aperture function (==pupil shape) and FT is the Fourier transform.

The image of any general object i is then the convolution of the object O with the PSF:

$$i = O * S$$

The Optical Transfer Function (OTF) is the FT of the PSF:

$$I = O \times S$$

OTF is then the auto-correlation of the aperture function A

Optical Transfer Function of 2 aperture interferometer

$$OTF = 2 \left(\frac{\lambda}{R} \right)^2 \left[\delta(\vec{\zeta}) + \frac{1}{2} \delta \left(\vec{\zeta} - \vec{s}/\lambda \right) + \frac{1}{2} \delta \left(\vec{\zeta} + \vec{s}/\lambda \right) \right]$$

- pair of pinholes transmits three spatial frequencies
 - DC-component $\delta(\vec{0})$
 - two high frequencies related to length of baseline vector \vec{s} at $\pm\vec{s}/\lambda$
- 3 spatial frequencies represent three-point sampling of the **uv-plane** in 2-d spatial frequency space
- complete sampling of uv-plane provides sufficient information to completely reconstruct original brightness distribution

Point Spread Function of 2 aperture interferometer

- PSF is Fourier Transform of OTF



$$\begin{aligned}\delta(\vec{\zeta}) &\Leftrightarrow 1 \\ \delta\left(\vec{\zeta} - \vec{s}/\lambda\right) &\Leftrightarrow e^{i2\pi\vec{\theta} \cdot \vec{s}/\lambda} \\ \delta\left(\vec{\zeta} + \vec{s}/\lambda\right) &\Leftrightarrow e^{-i2\pi\vec{\theta} \cdot \vec{s}/\lambda}\end{aligned}$$

- Point-Spread Function of 2-element interferometer

$$\left(\frac{\lambda}{R}\right)^2 \left[2(1 + \cos 2\pi\vec{\theta} \cdot \vec{s}/\lambda)\right] = 4 \left(\frac{\lambda}{R}\right)^2 \cos^2 \pi\vec{\theta} \cdot \vec{s}/\lambda$$

- $\vec{\theta}$: 2-d angular coordinate vector
- attenuation factor $(\lambda/R)^2$ from spherical expansion



Two element interferometer

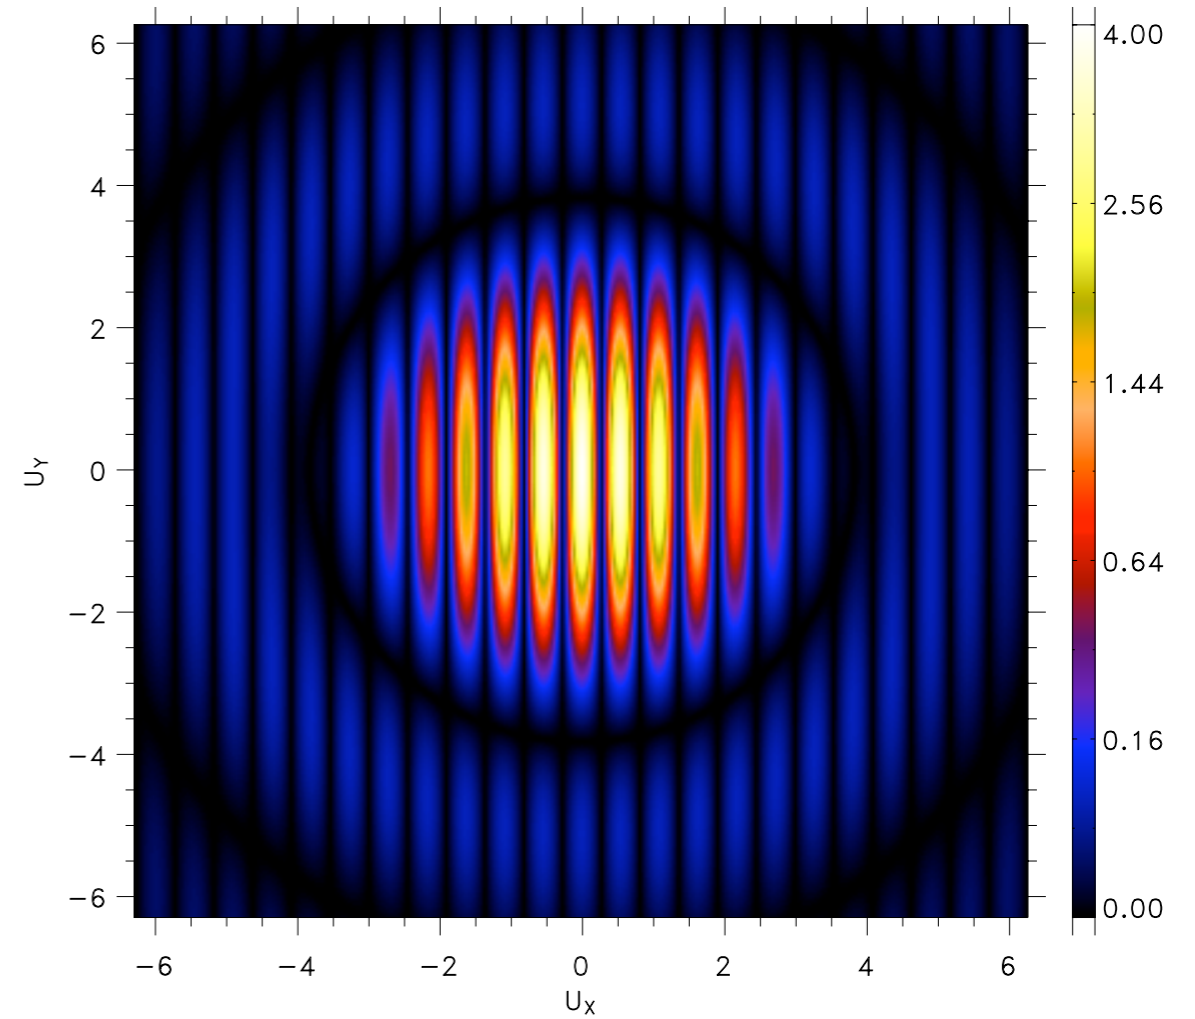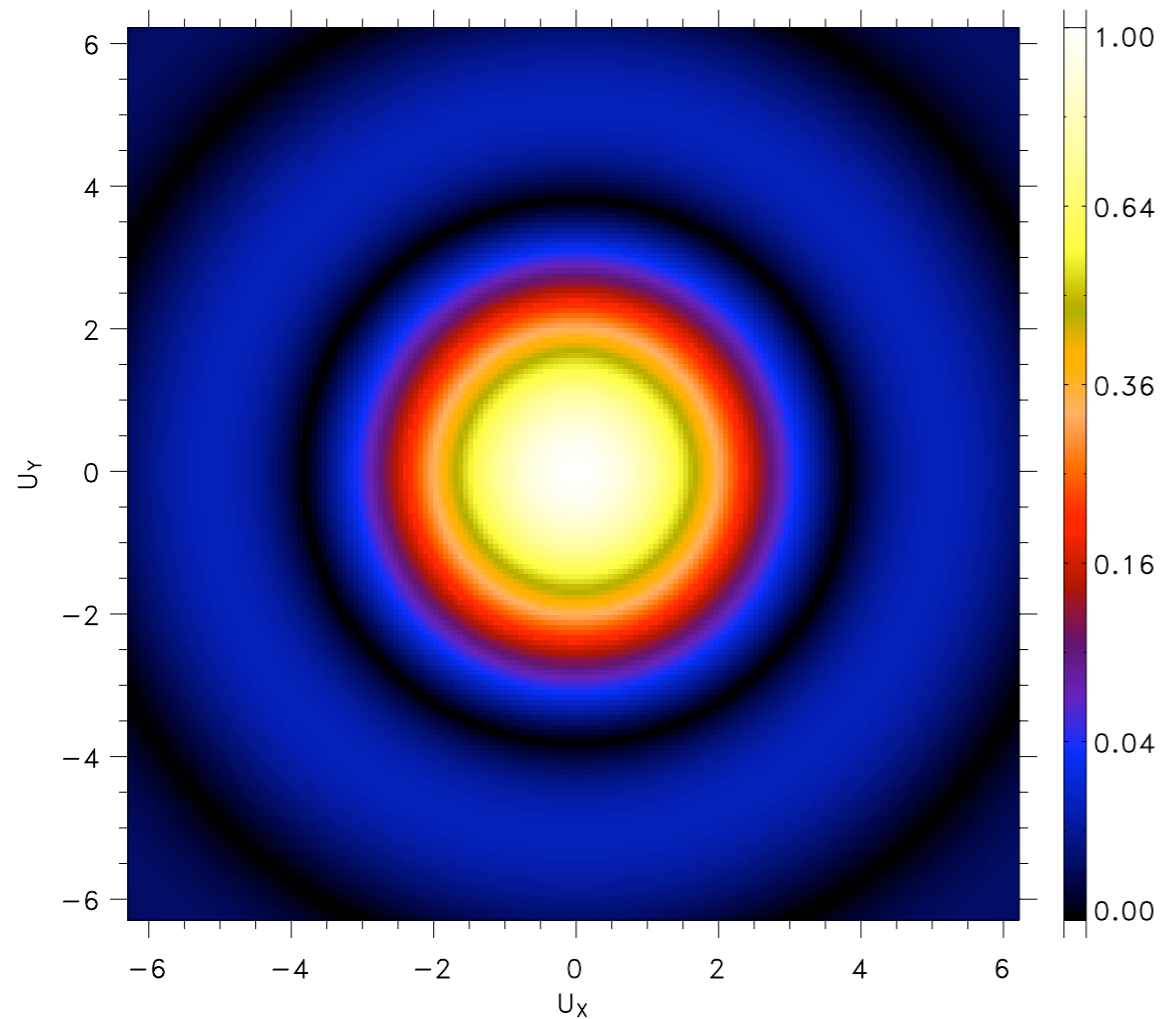

A single dish PSF on the sky

**Two dishes on the sky diameter $d = 25\text{m}$
separated by $s=144\text{m}$**

Ten element interferometer

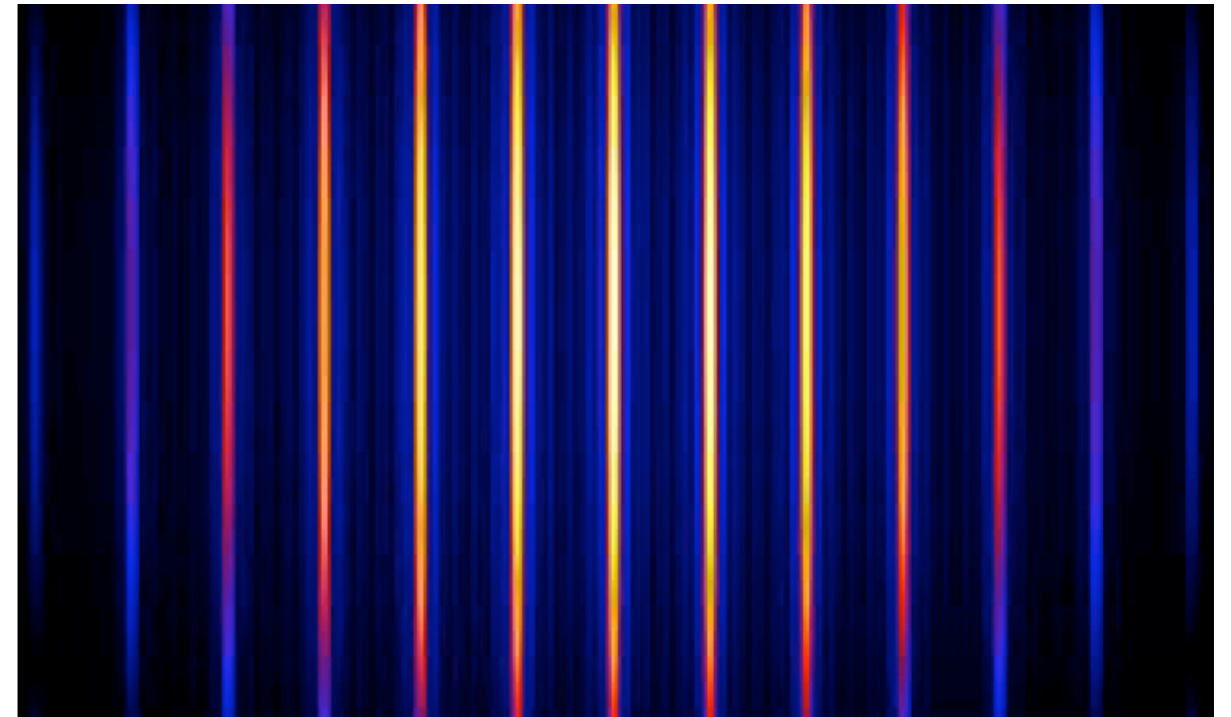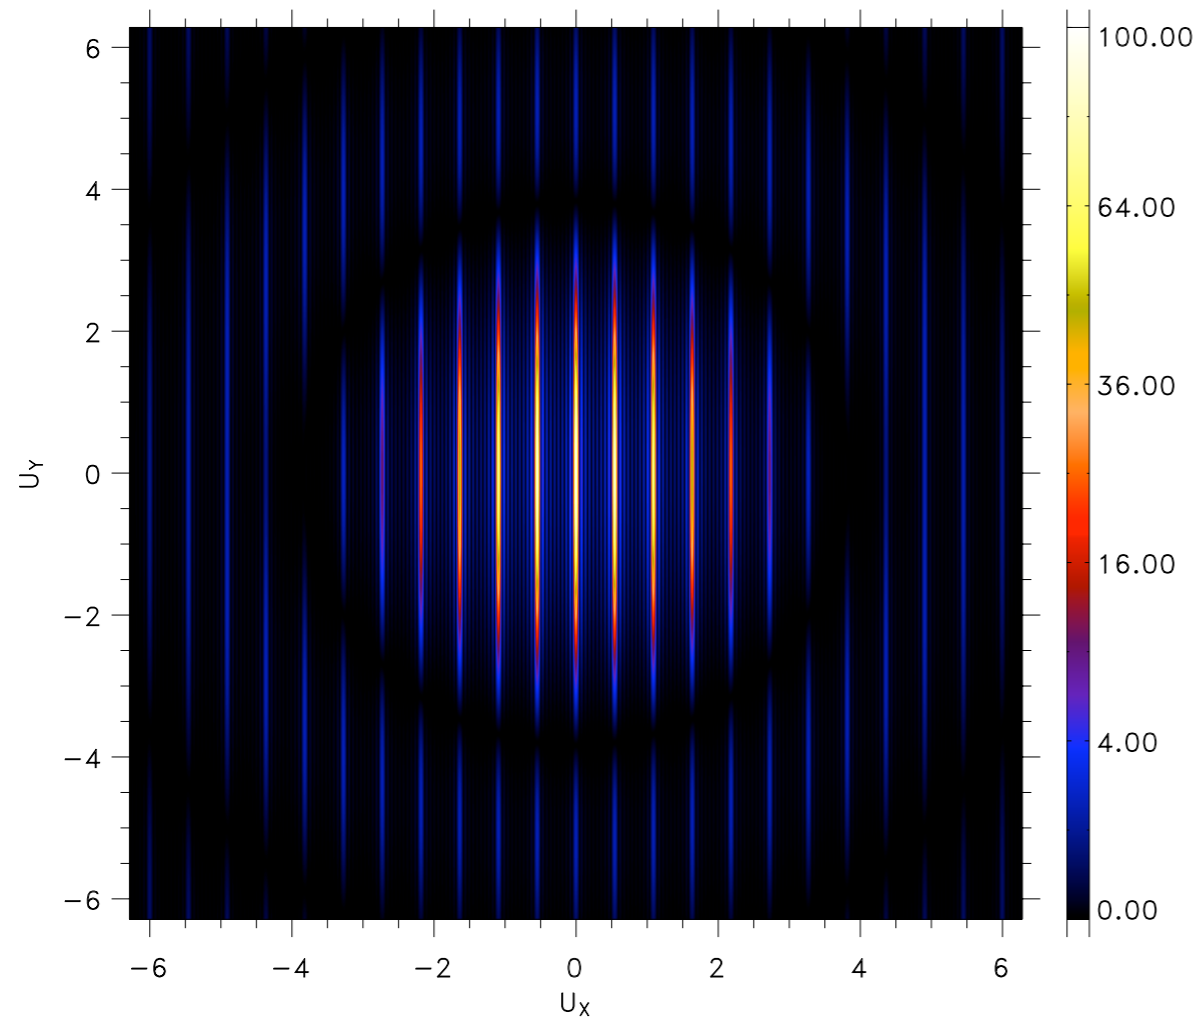

10 elements makes the fringes narrower

Equally spaced array of telescopes

- scalar function due to circular symmetry

$$PSF_{ERAS} = \left(\frac{\lambda}{R}\right)^2 \left[\frac{1}{4}\pi (d/\lambda)^2\right]^2 \left[\frac{2J_1(u)}{u}\right]^2 \frac{\sin^2 N(u\Delta L/D)}{\sin^2(u\Delta L/D)}$$

with $u = \pi\theta D/\lambda$ and θ , the radially symmetric, diffraction angle


- central peak: similar to Airy function with spatial resolution

$$\Delta\theta = \frac{\lambda}{2L_{max}} \text{ radians}$$

with $2L_{max}$ the maximum diameter of the array in the YZ-plane

- concentric grating lobes: angular distances of annuli from central peak follow from the location of principal maxima given by modulation term $\sin^2 N(u\Delta L/D) / \sin^2(u\Delta L/D)$


Rotating this array of telescopes on the sky causes symmetric PSF

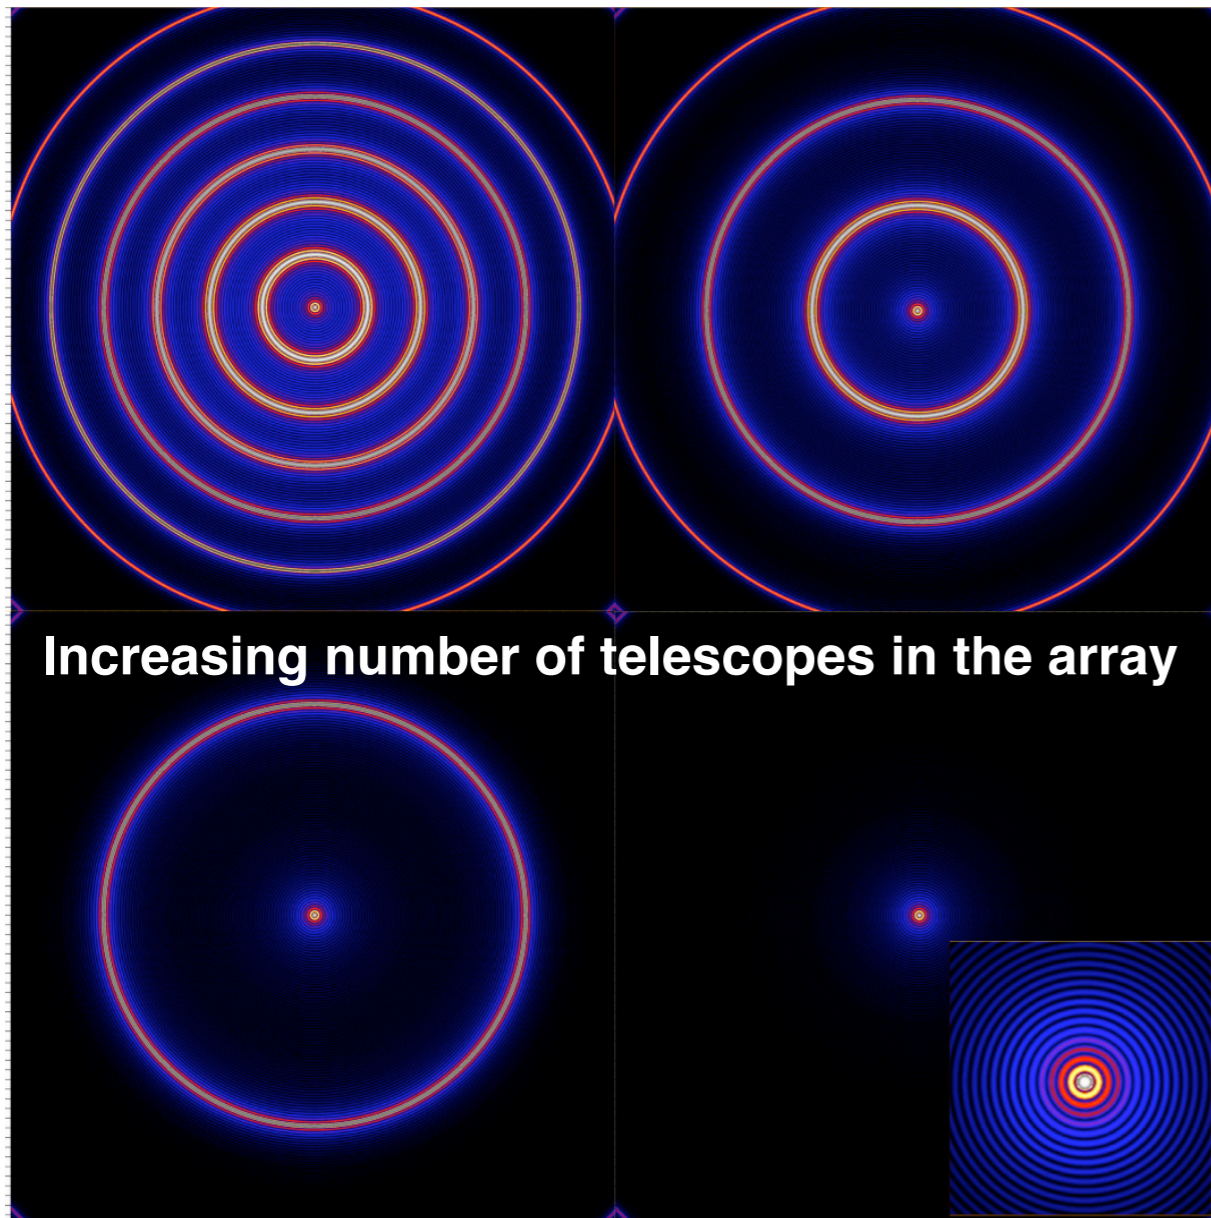


For an N element array with separation these angular positions are:

$$\theta_{grating} = \frac{\lambda}{\Delta L}, 2\frac{\lambda}{\Delta L}, \dots, (N - 1)\frac{\lambda}{\Delta L}$$

Reconstruction of a pair of point sources seen by an array of telescopes

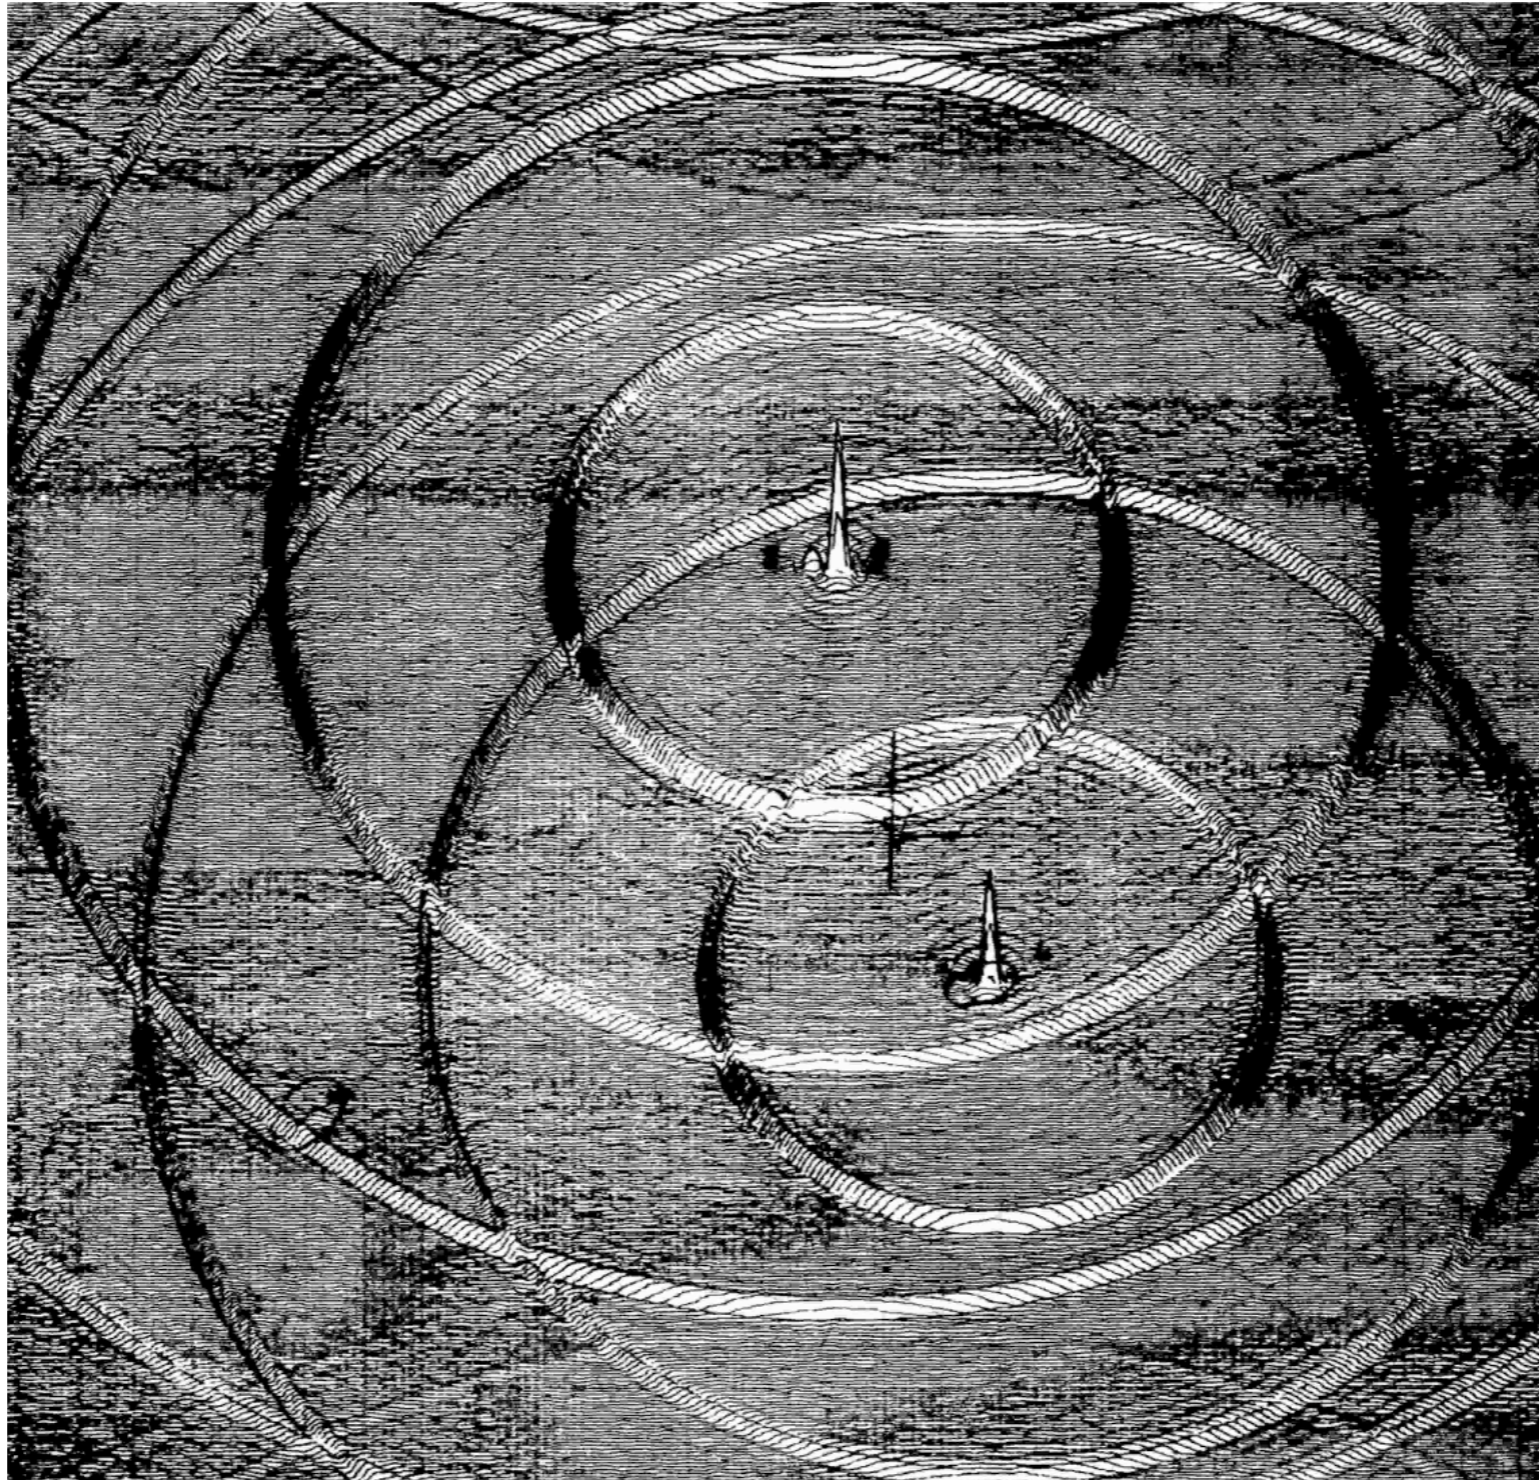



Fit the PSF of the array and remove it, but it is a tricky inverse problem....

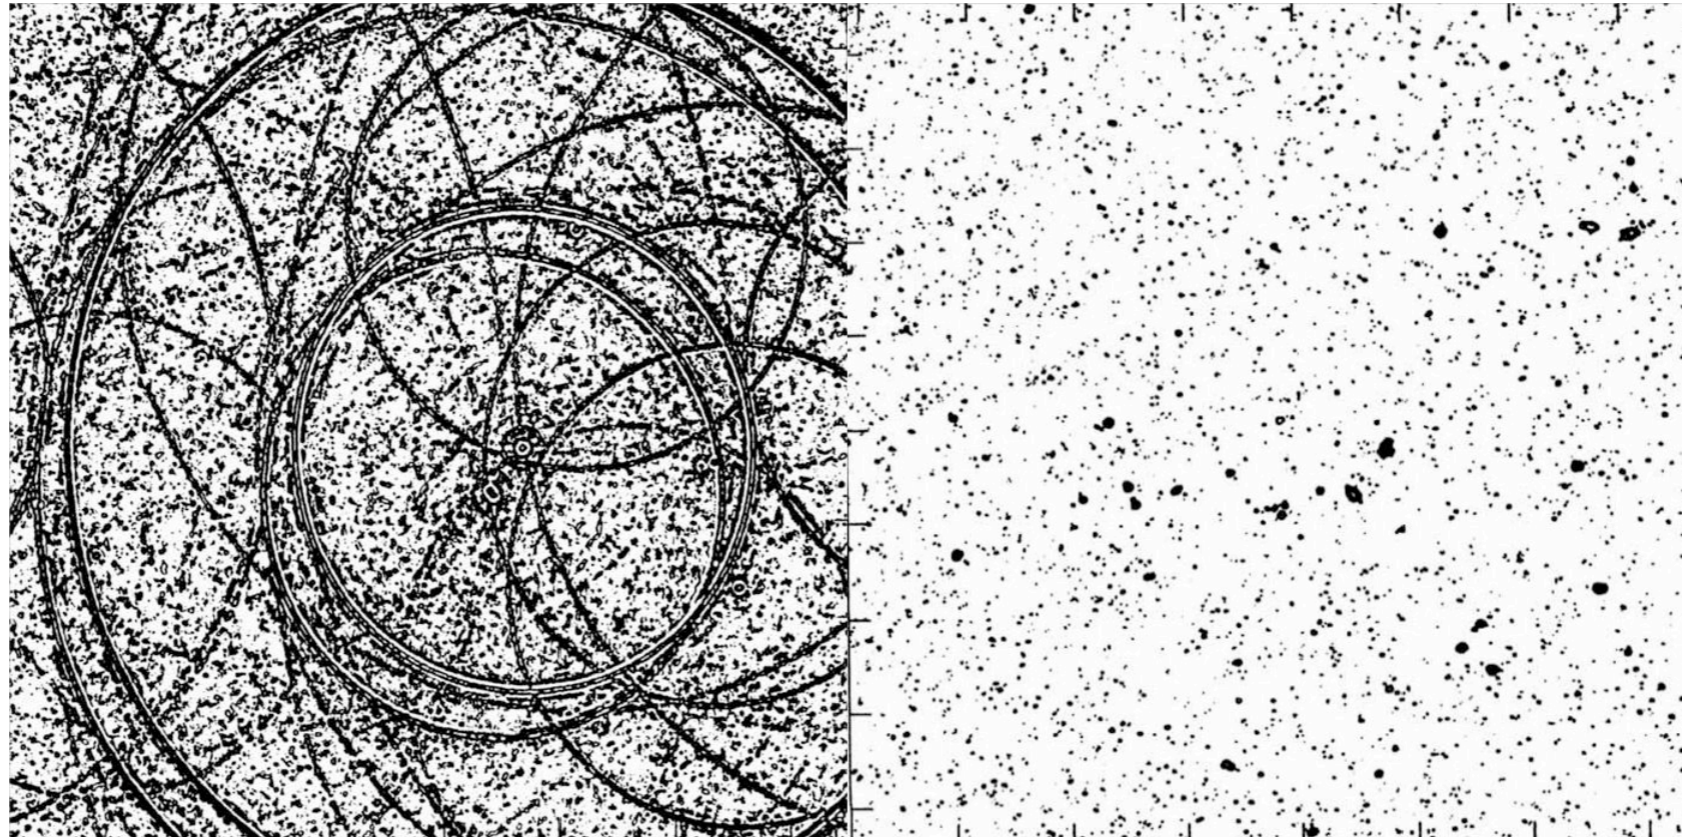

undersampling of uv-plane, grating lobes within field of view
decrease distance between antennas 9 and A during second half
of rotation for 36 meter increment coverage
four half rotations in 48 hours can increase coverage to 18 meter
increments \Rightarrow complete uv coverage

Earth Rotation fills in uv plane



Pair of telescopes in East-West line appear to rotate about each other once every 24 hours when see by a celestial object

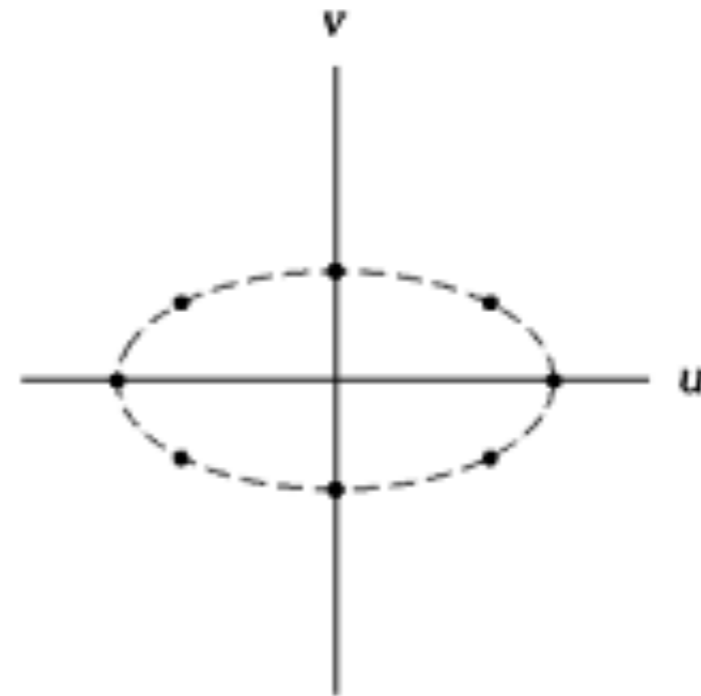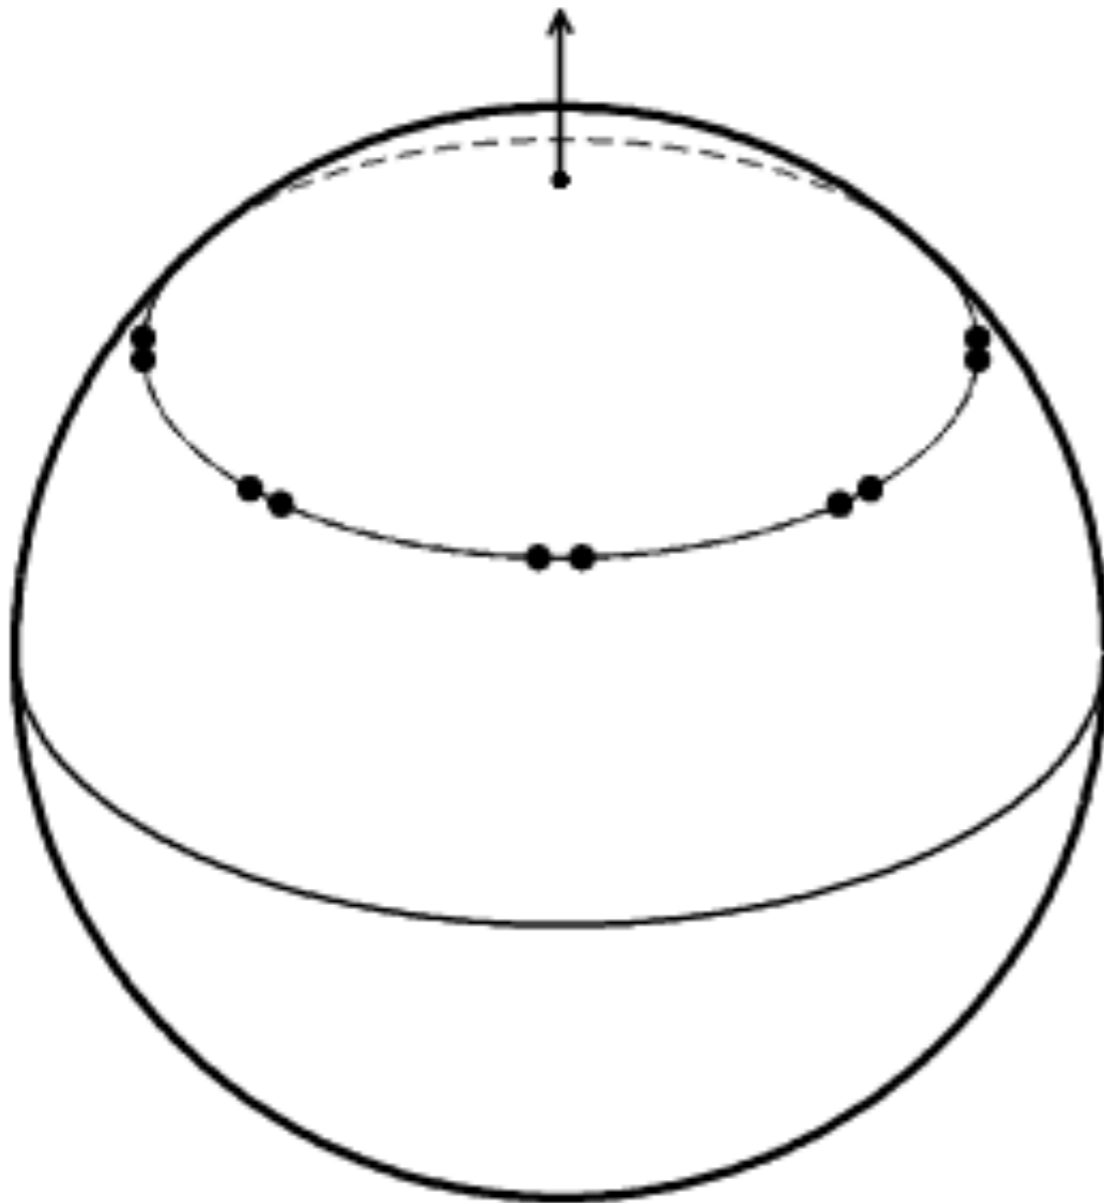



The v axis of the ellipse is smaller by cosine (declination)

Earth Rotation fills in uv plane


2 configurations of 8 SMA telescopes

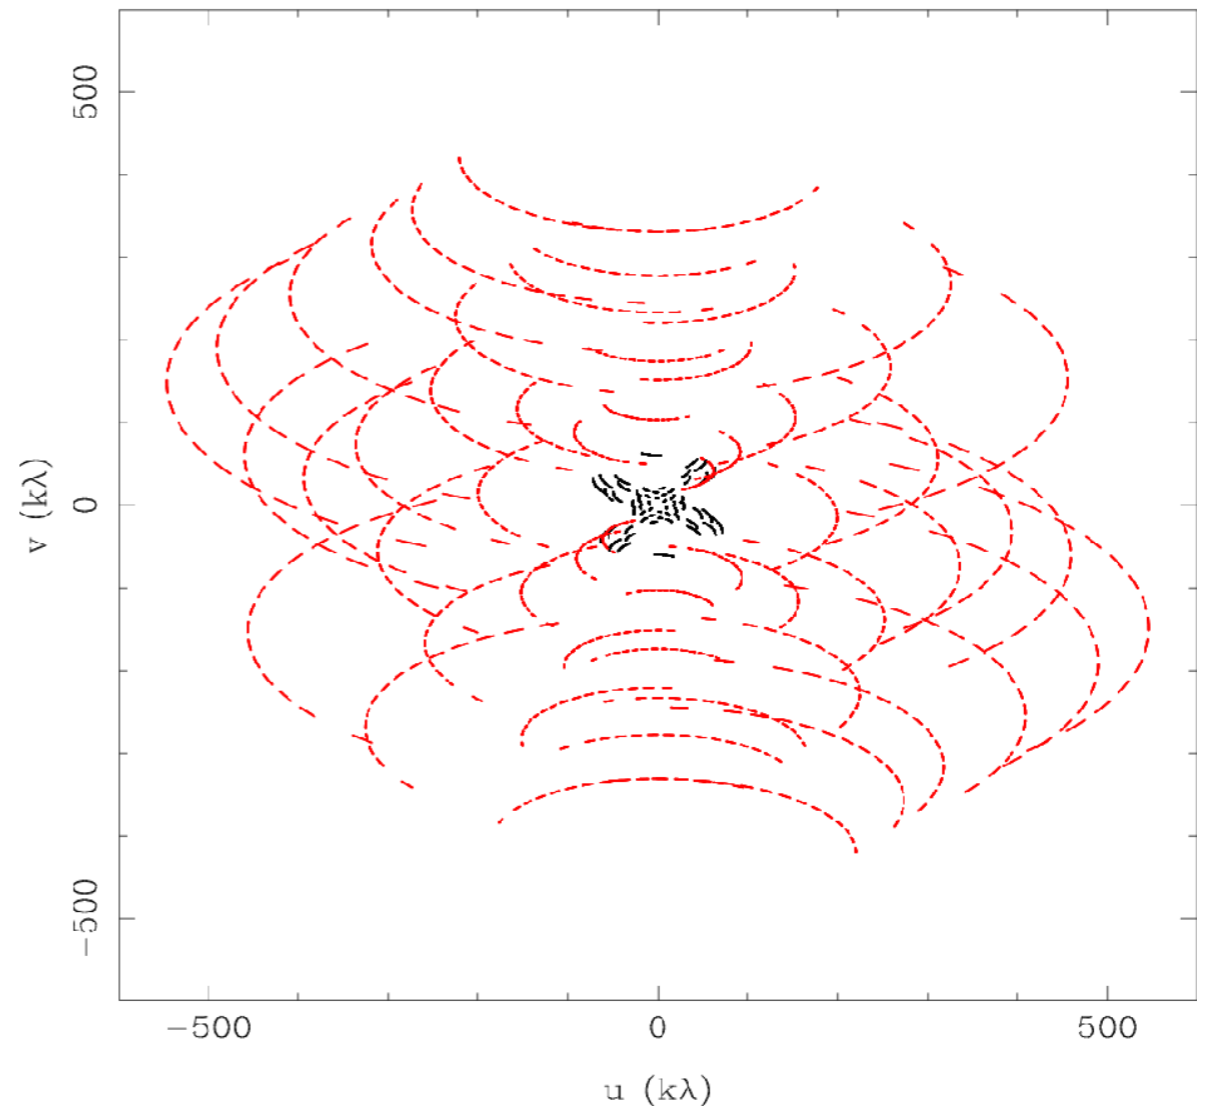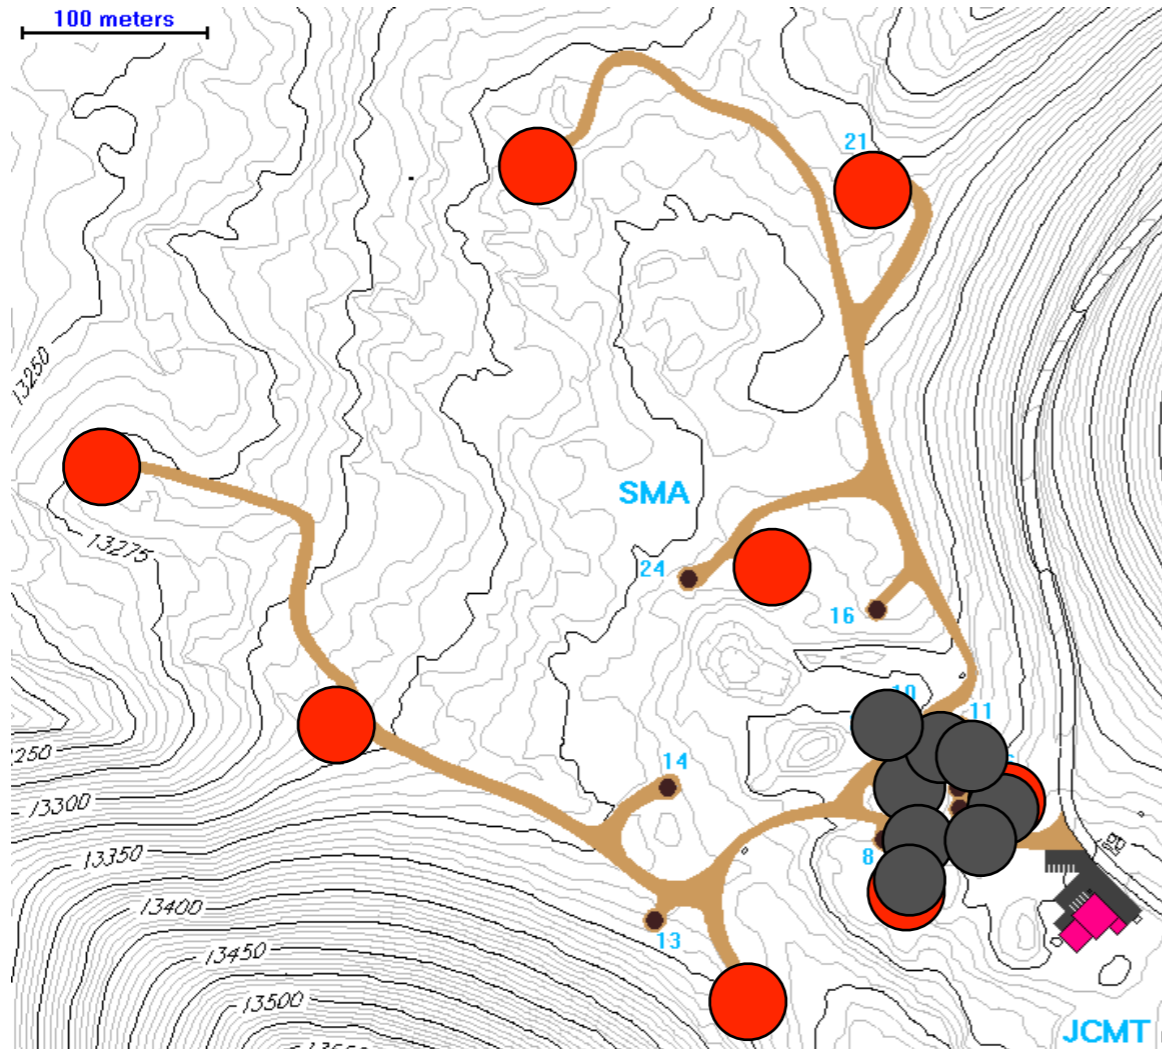

Rotation of Earth during observations 'fills in' the uv plane

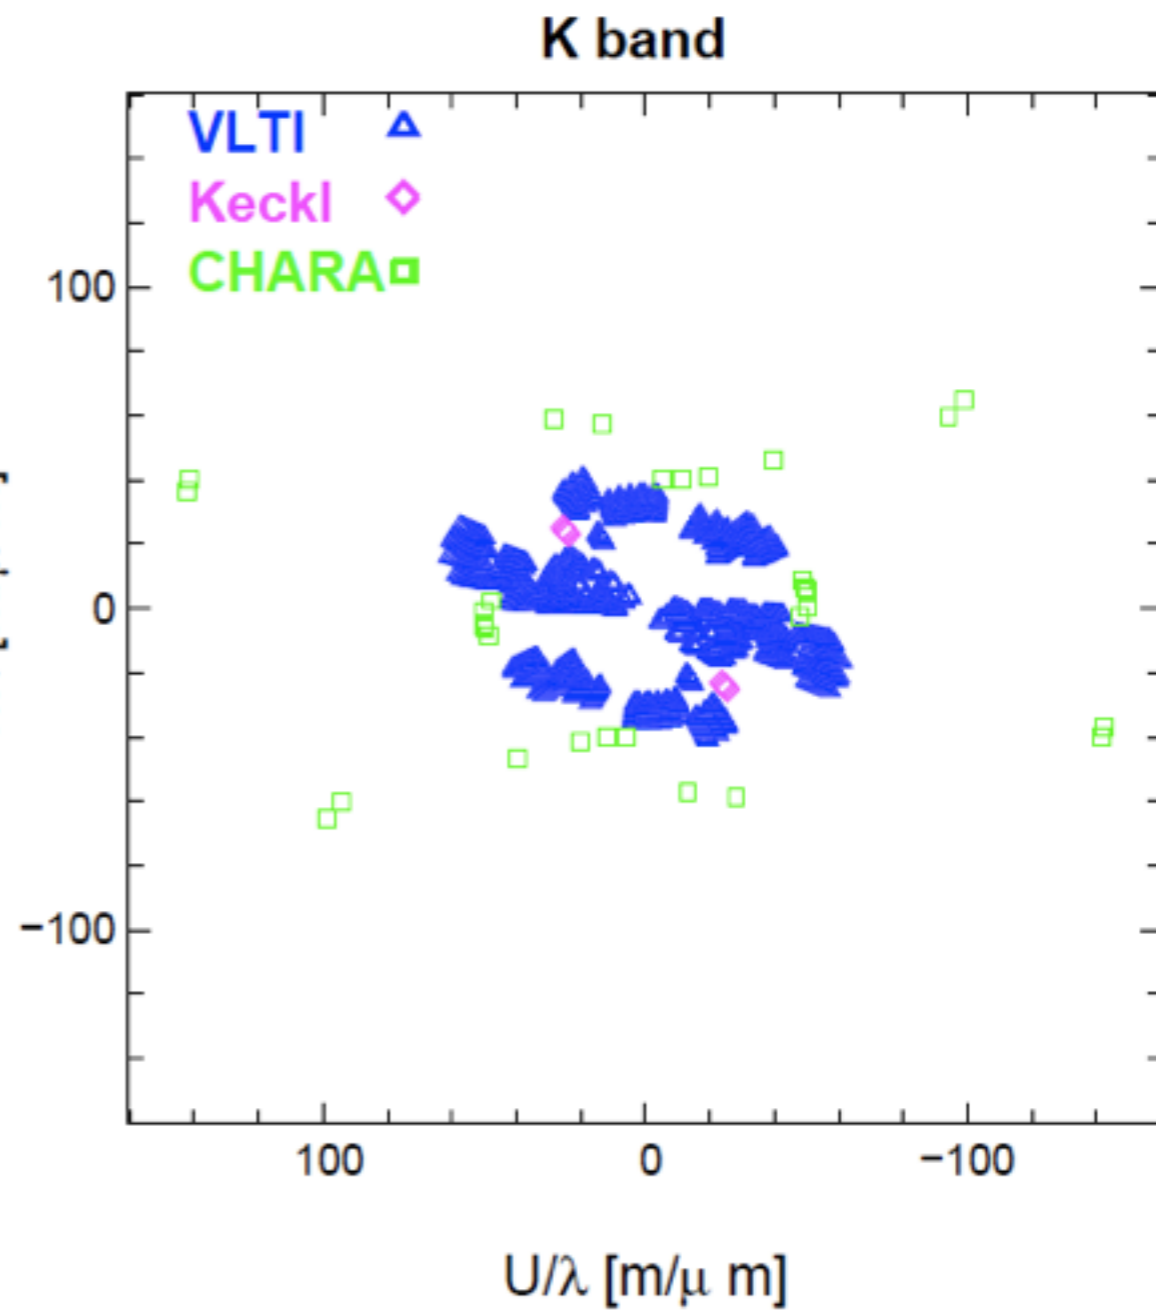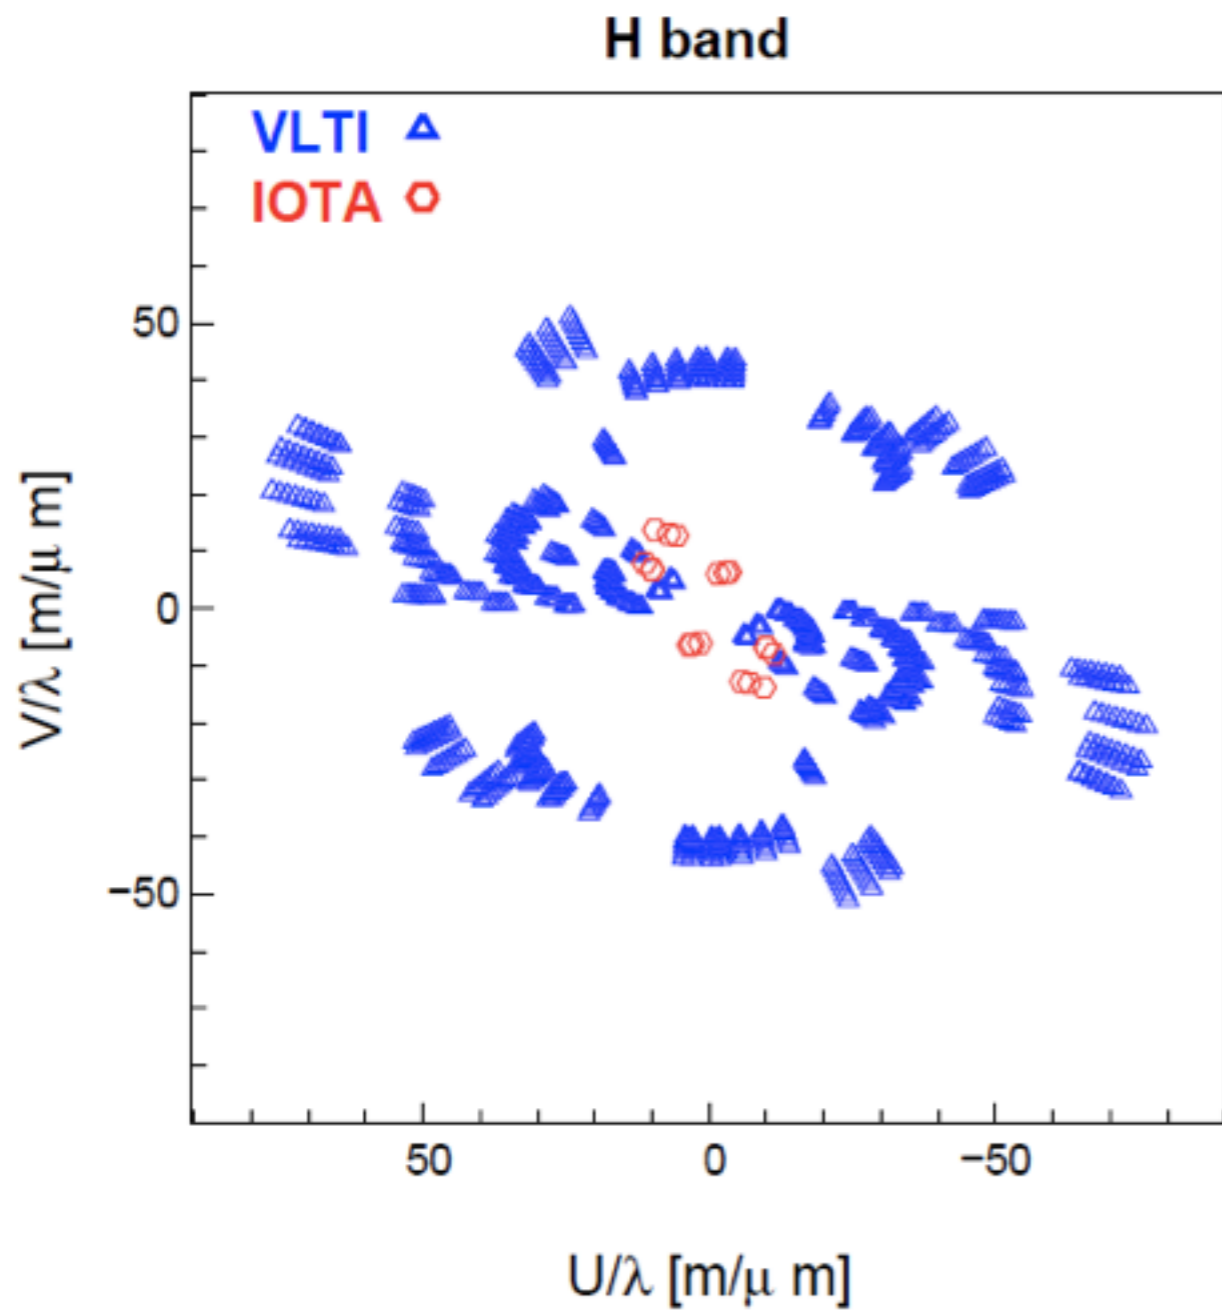


Westerbork Synthesis Radio Telescope (WSRT)

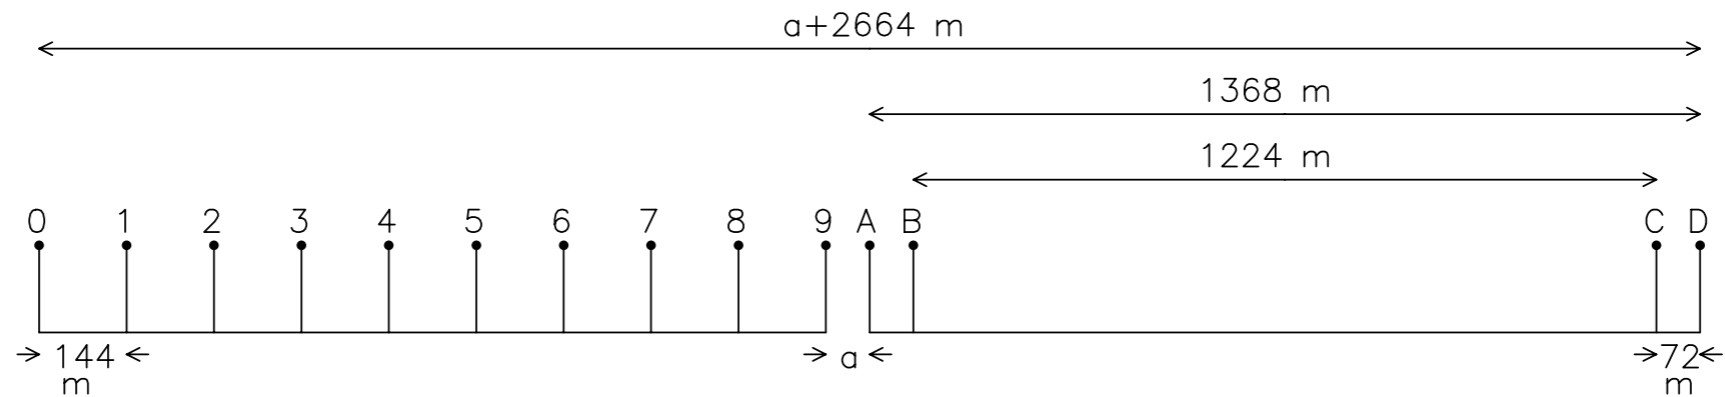

- 14 parabolic antennae, diameters $D = 25$ m
- lined up along East-West direction over ≈ 2750 m
- 10 antennae have fixed mutual distance of 144 m
- 4 antennae can be moved collectively with respect to fixed array
- 14 antennae comprise 40 simultaneously operating interferometers
- array is rotated in plane containing Westerbork perpendicular to Earth's rotation axis
- limited to sources near the North polar axis
- standard distance a between 9 and A equals 72 meters


Westerbork Synthesis Radio Telescope (WSRT)

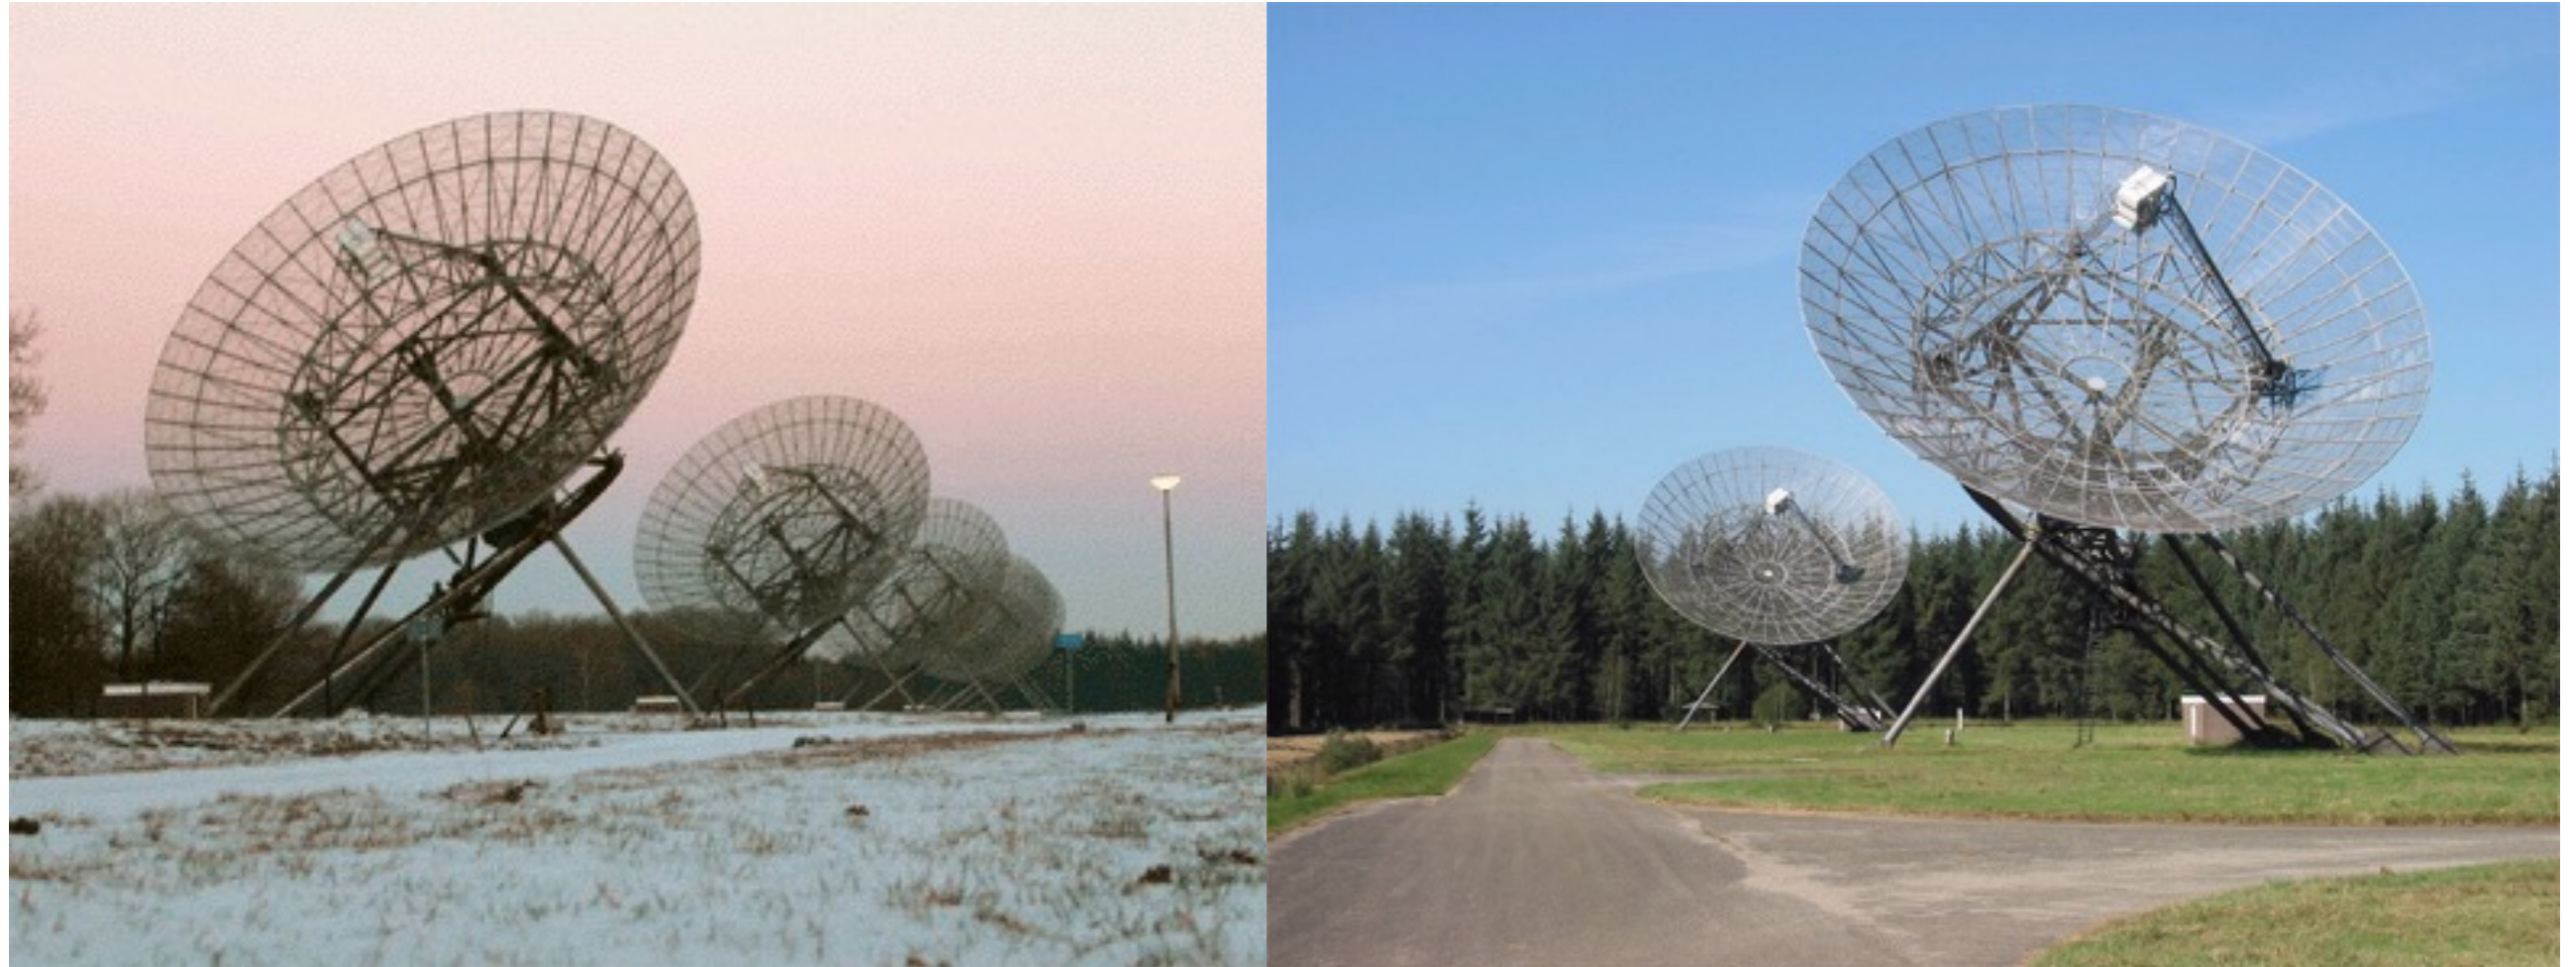


- after 12 hours, 38 concentric semi-circles with radii ranging from $L_{min} = 72$ meters to $L_{max} = 2736$ meters in increments of $\Delta L = 72$ meters
- correlators integrate over 10 s, sampling of semi-circles every $1/24$ degrees

Michelson's Interferometer

1908 on the 200 inch telescope at Palomar

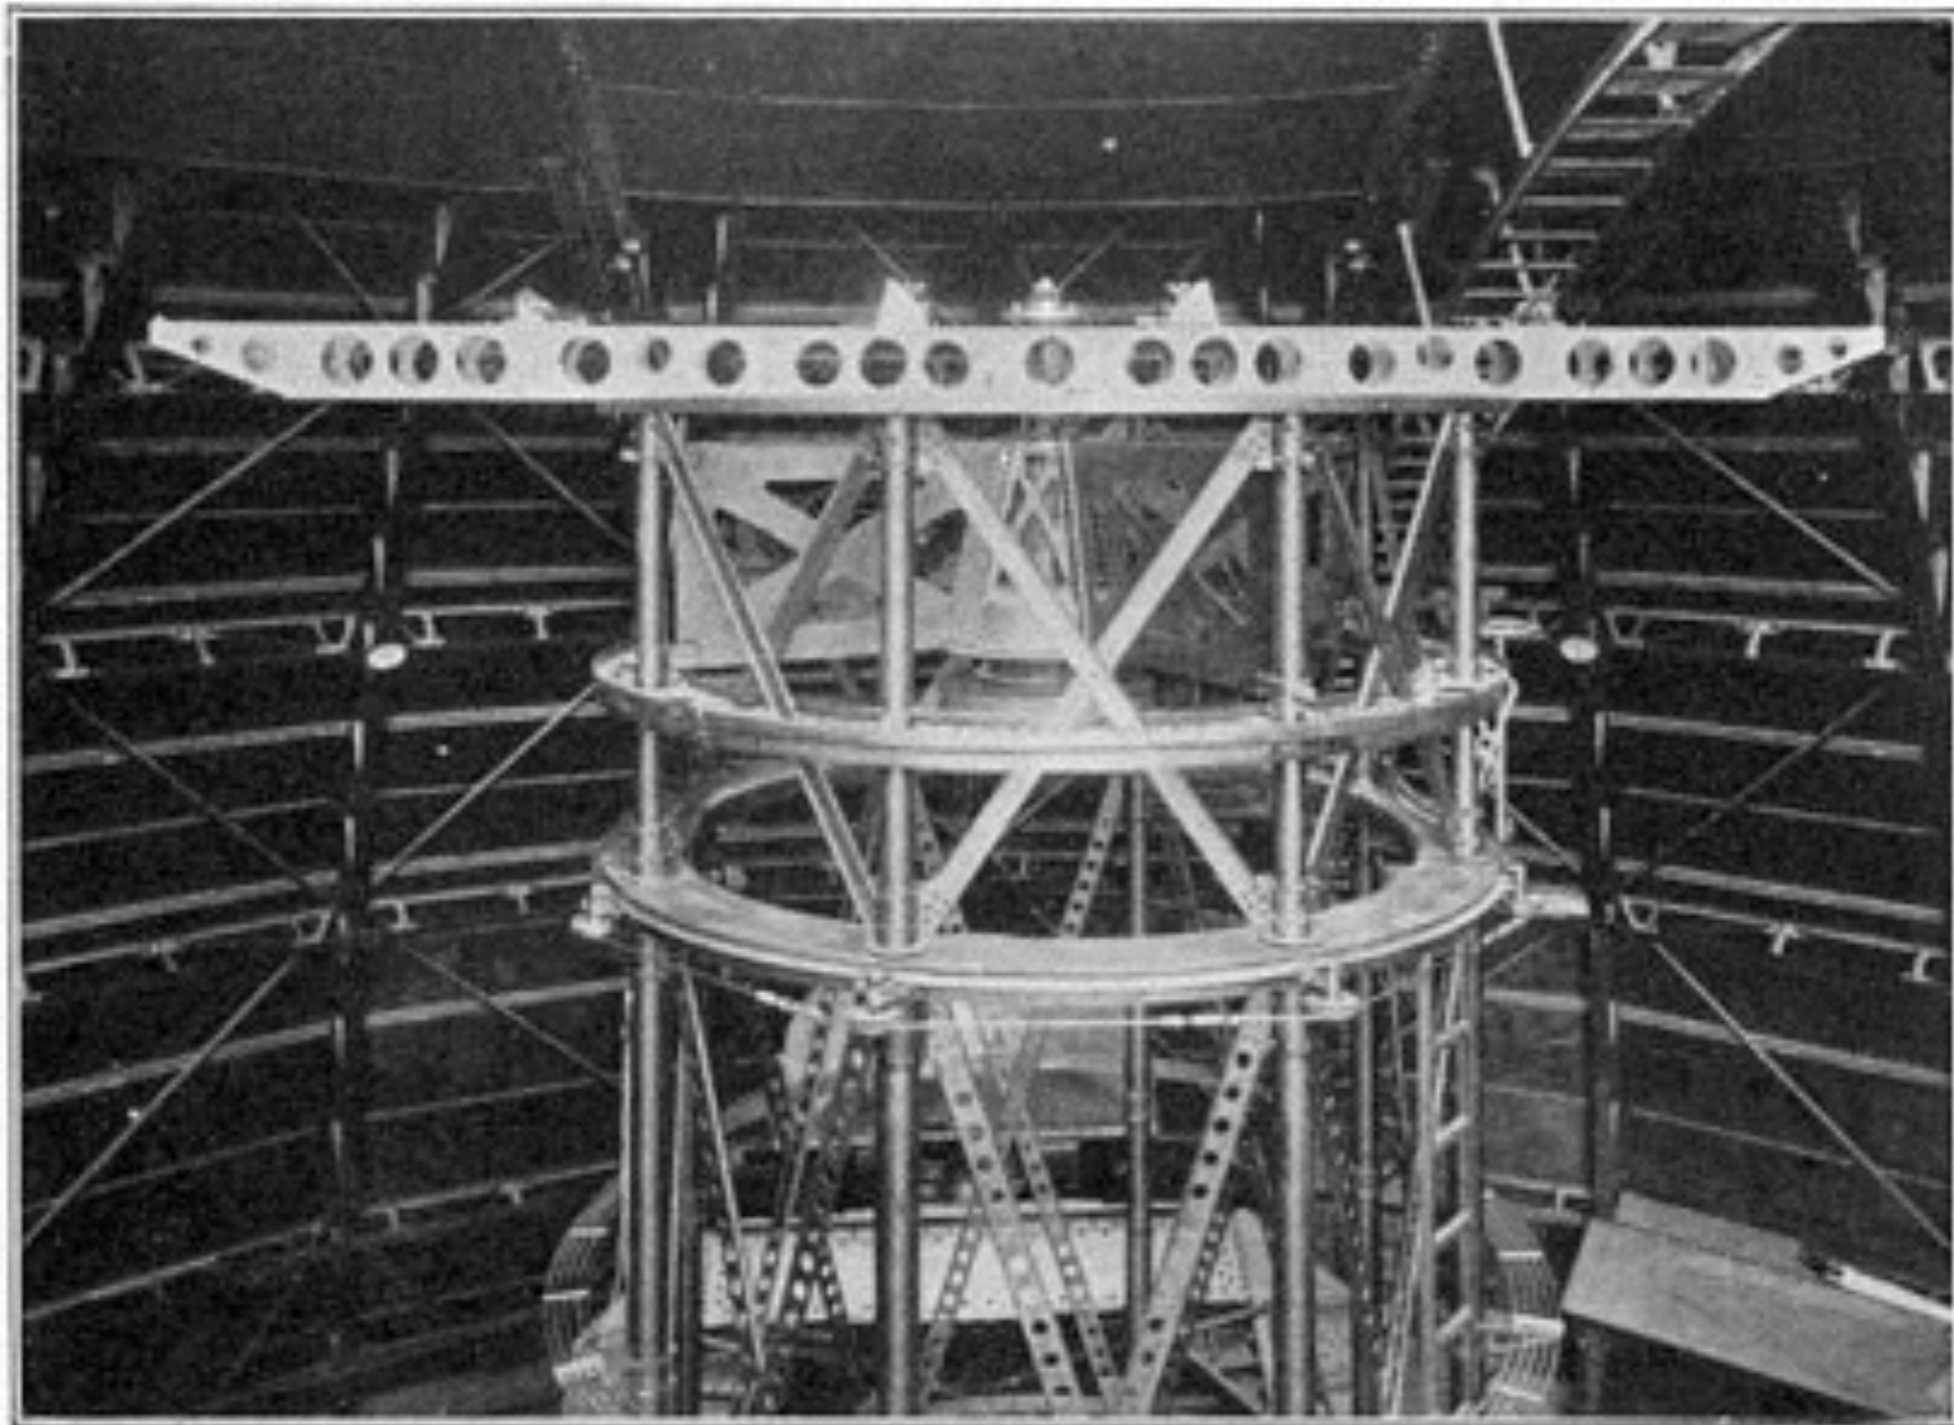


Fringes disappear when diameter of star is equal to the fringe separation in the interferometer

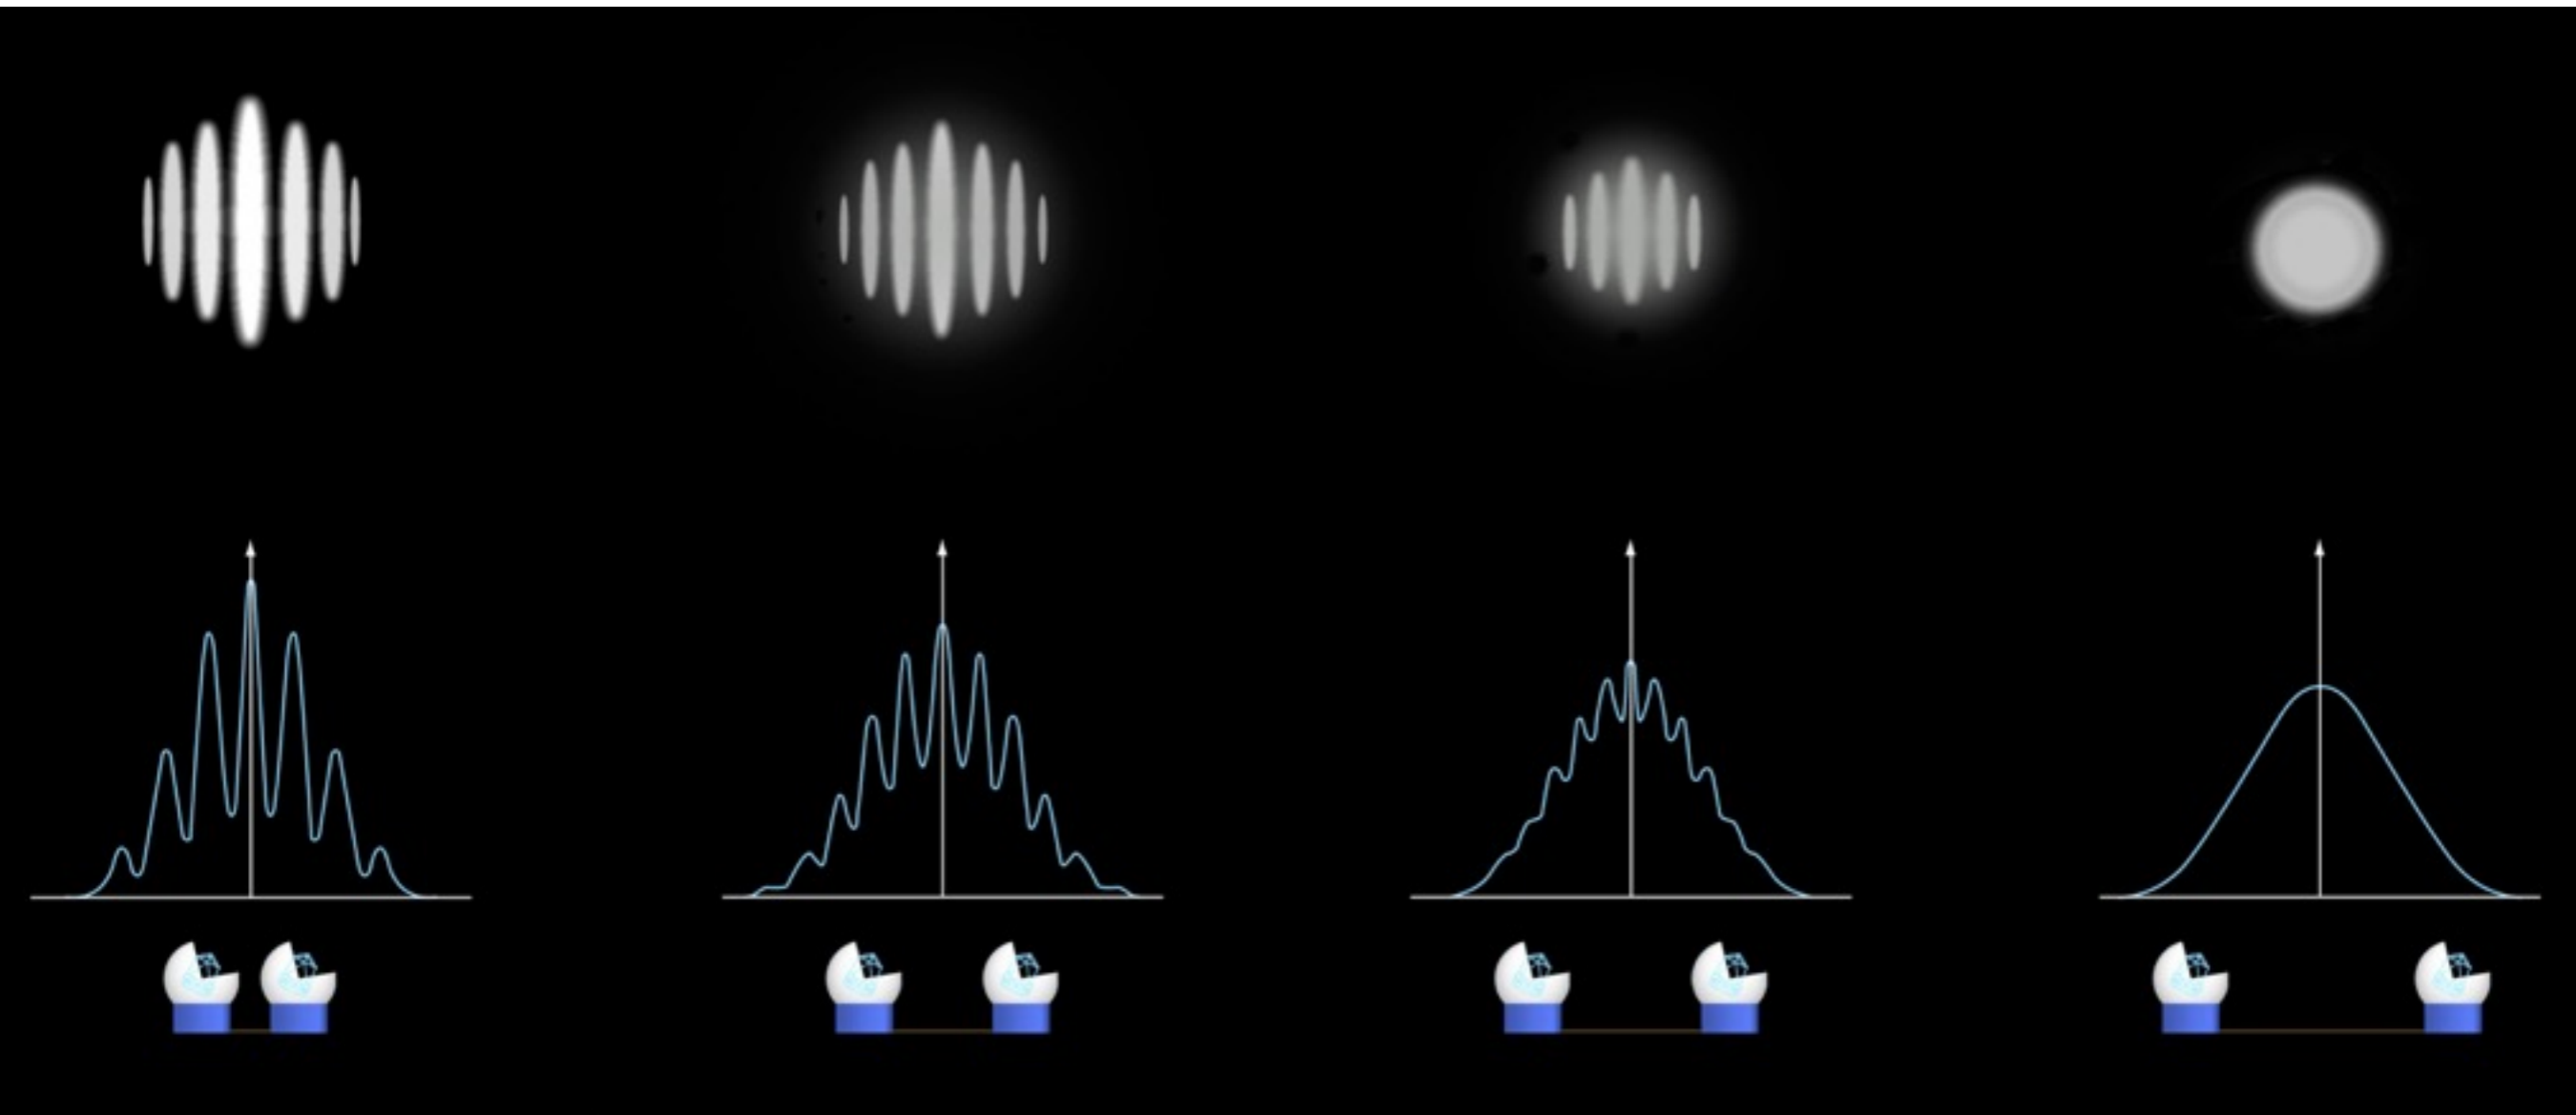


Original experiment by Michelson determined diameter of Betelgeuse

The VLT Interferometer

One of the fundamental reasons why four large telescopes were built on the same mountaintop!

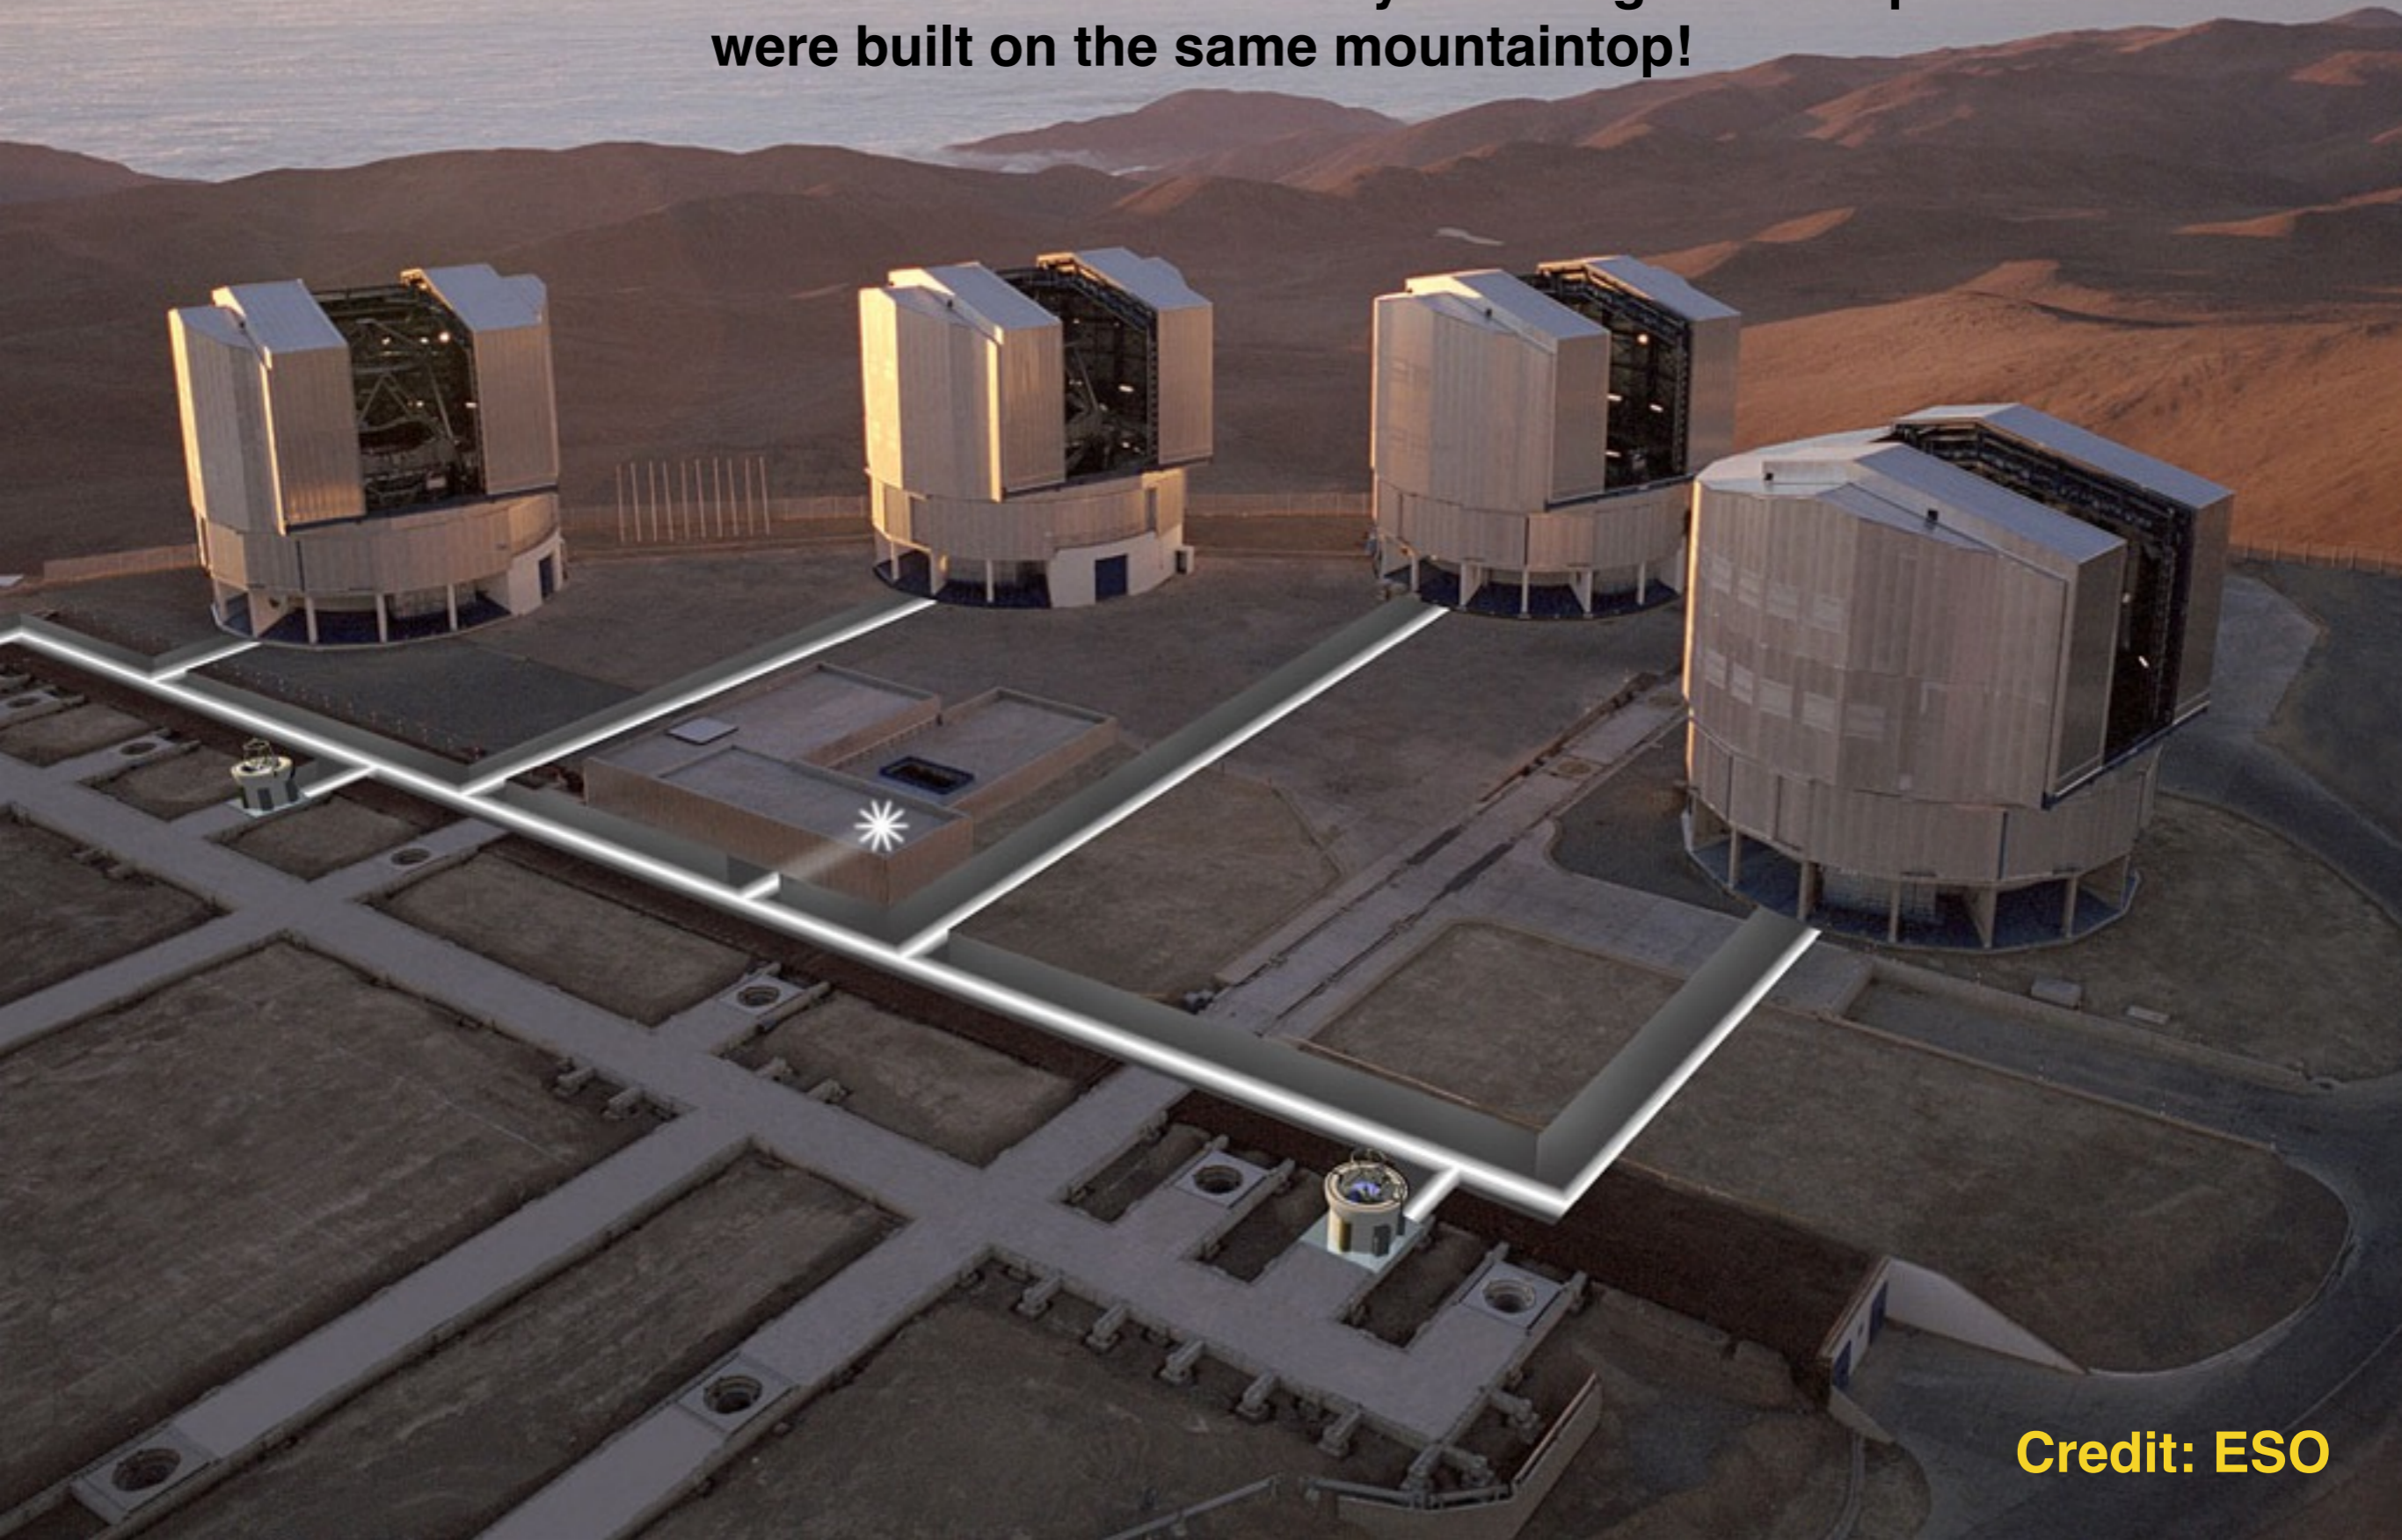

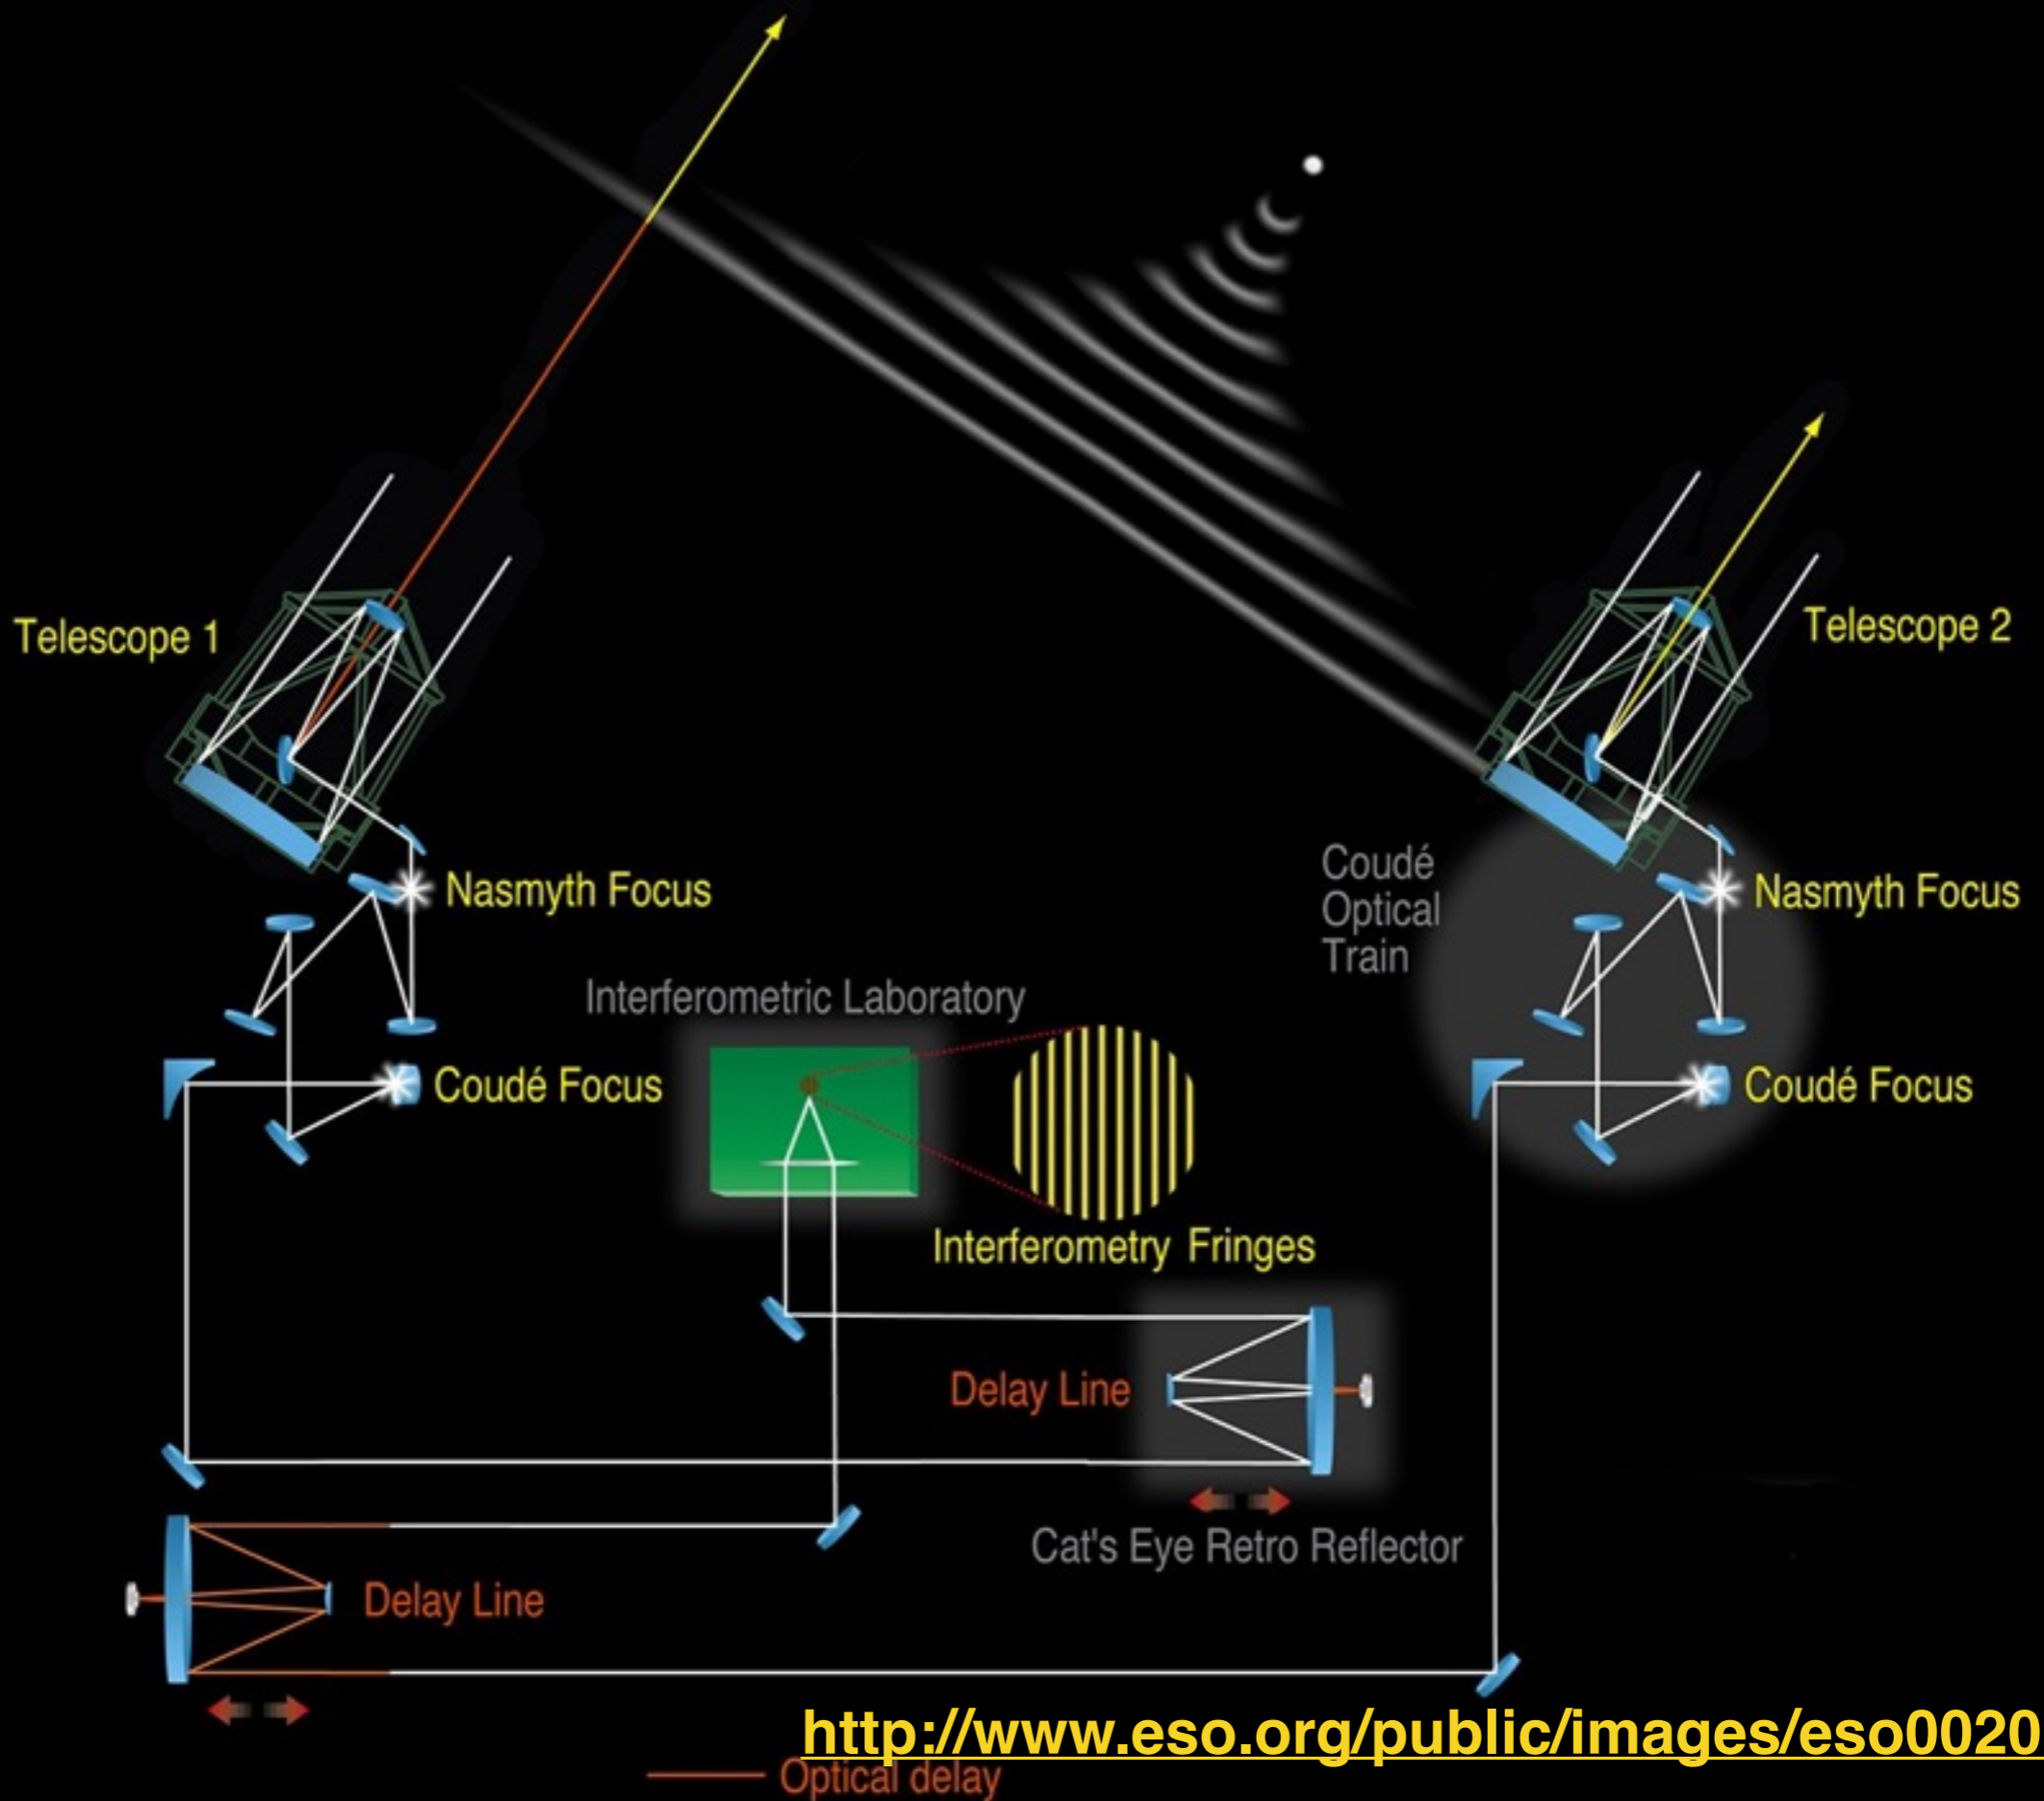

<http://www.eso.org/public/images/eso0020b/>


Delay lines under the mountain

Compensate for optical path difference between telescopes
with a beam compensation room



Continuous beam path compensation

Movable carts need to position retroreflectors with an accuracy of 10 nanometers over a length of 60 metres

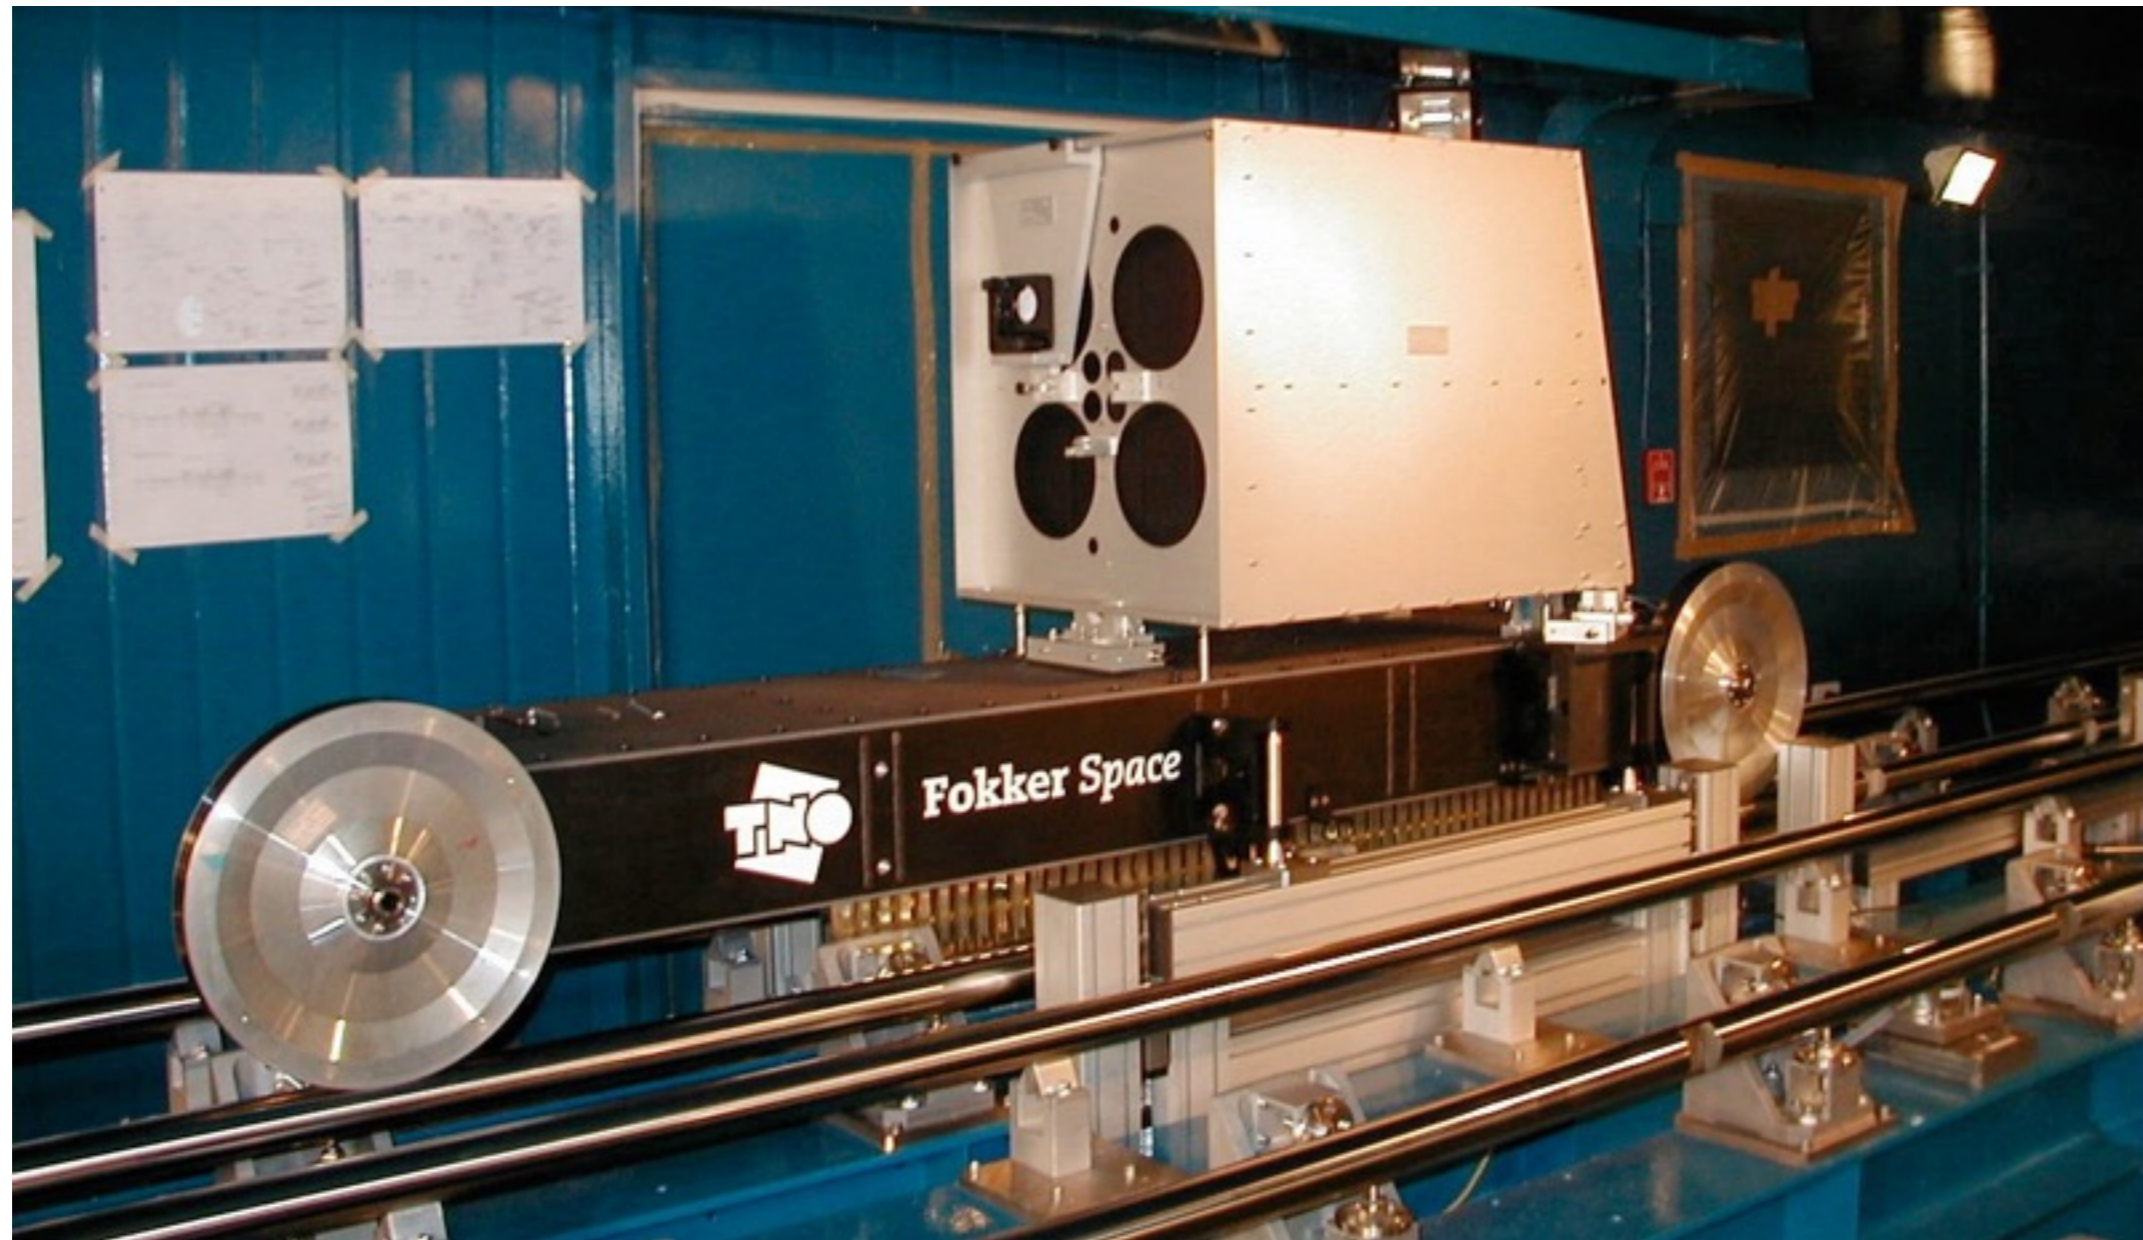

Stellar diameter measurements due to fringe visibility




Two different stars with different angular sizes




Single dish telescope



Fringe pattern seen by interferometer

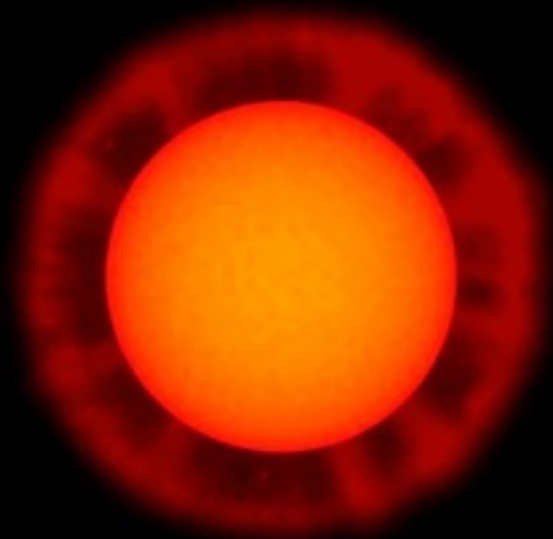

VLTI results in resolved images of giant stars

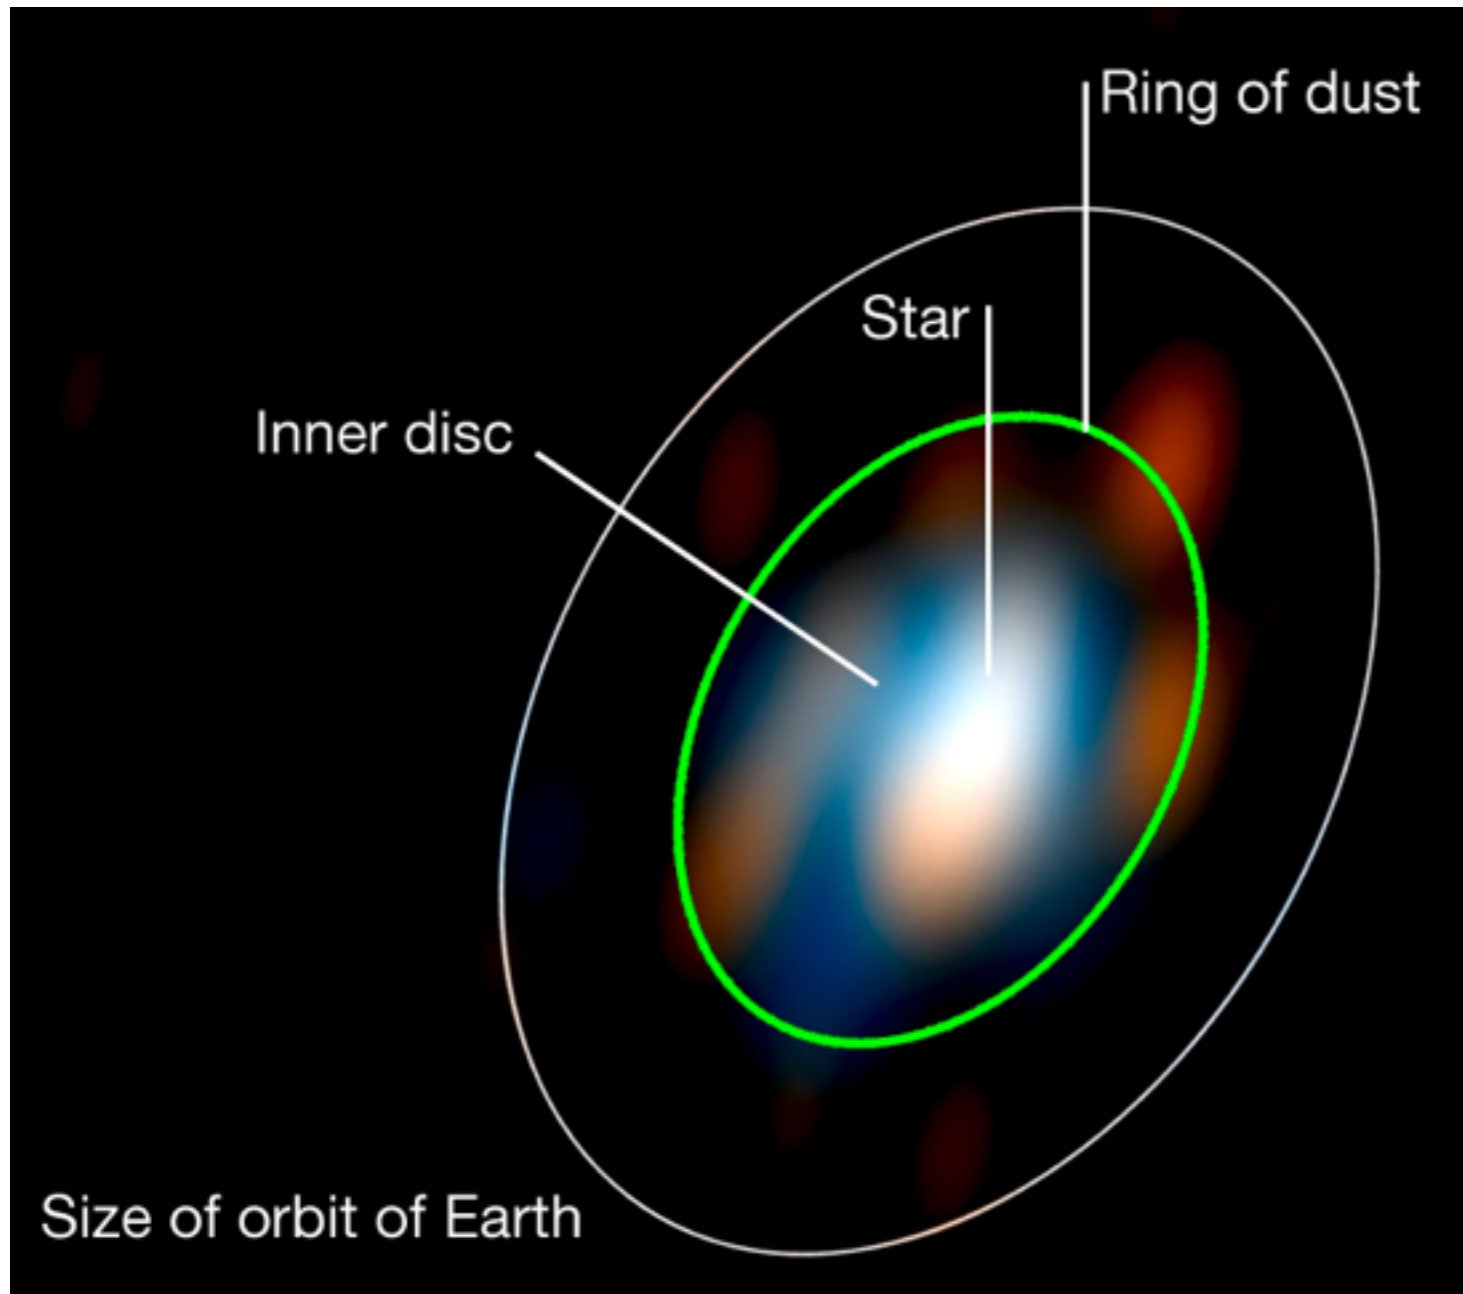

Field of view of 25 mas

H and K band data

**Combination of VLTI,
IOTA, Keck I and CHARA
interferometers**

Herbig Ae star HD 163296


Intensity Interferometry

Correlation with intensity as seen by two telescopes

Hanbury-Brown and Twiss Effect



Nairobi Interferometer 1956


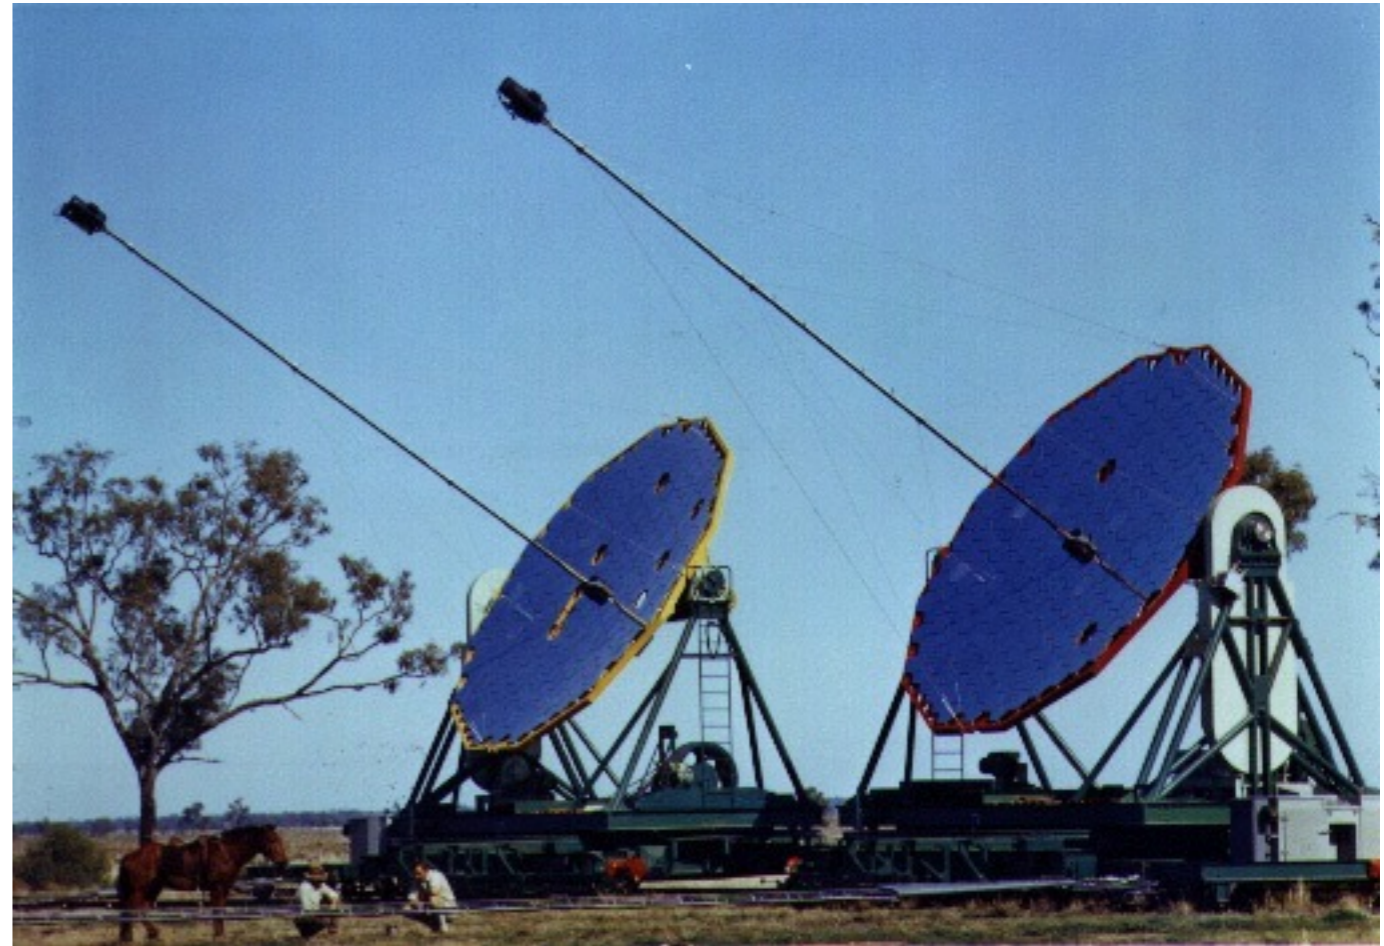


“A test of a new type of stellar interferometer on Sirius” (1956)

Light buckets - do not need to be high optical quality

Intensity correlation can be explained classically and with quantum mechanics

Measuring the diameter of hot nearby stars

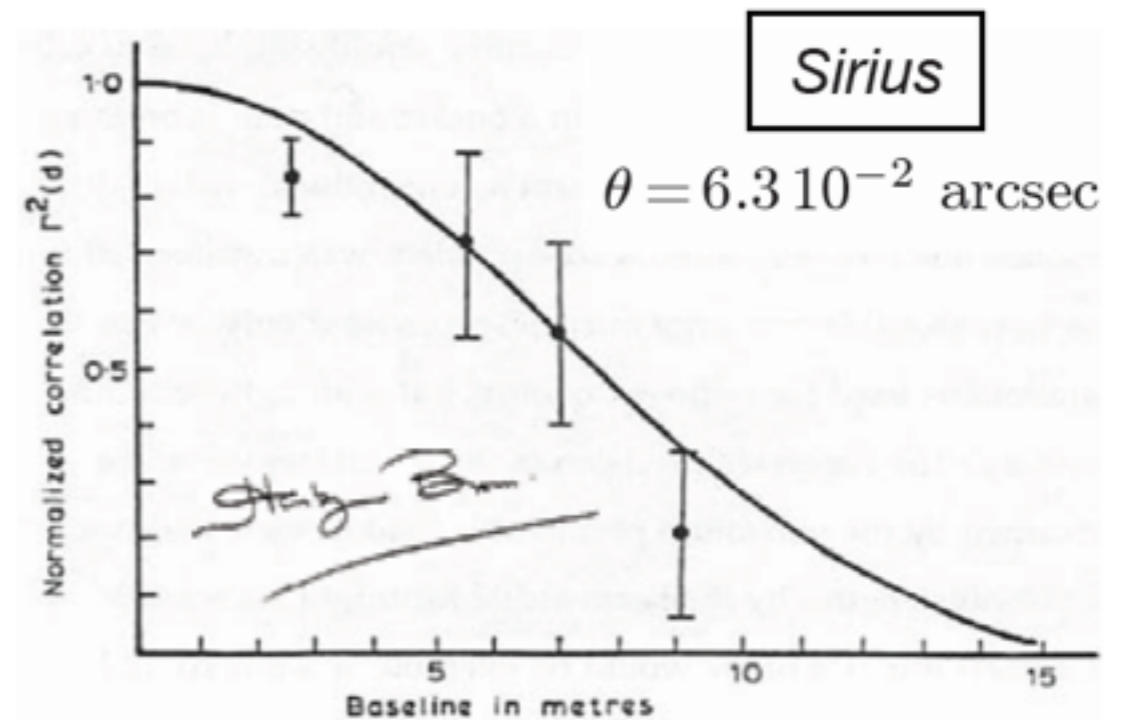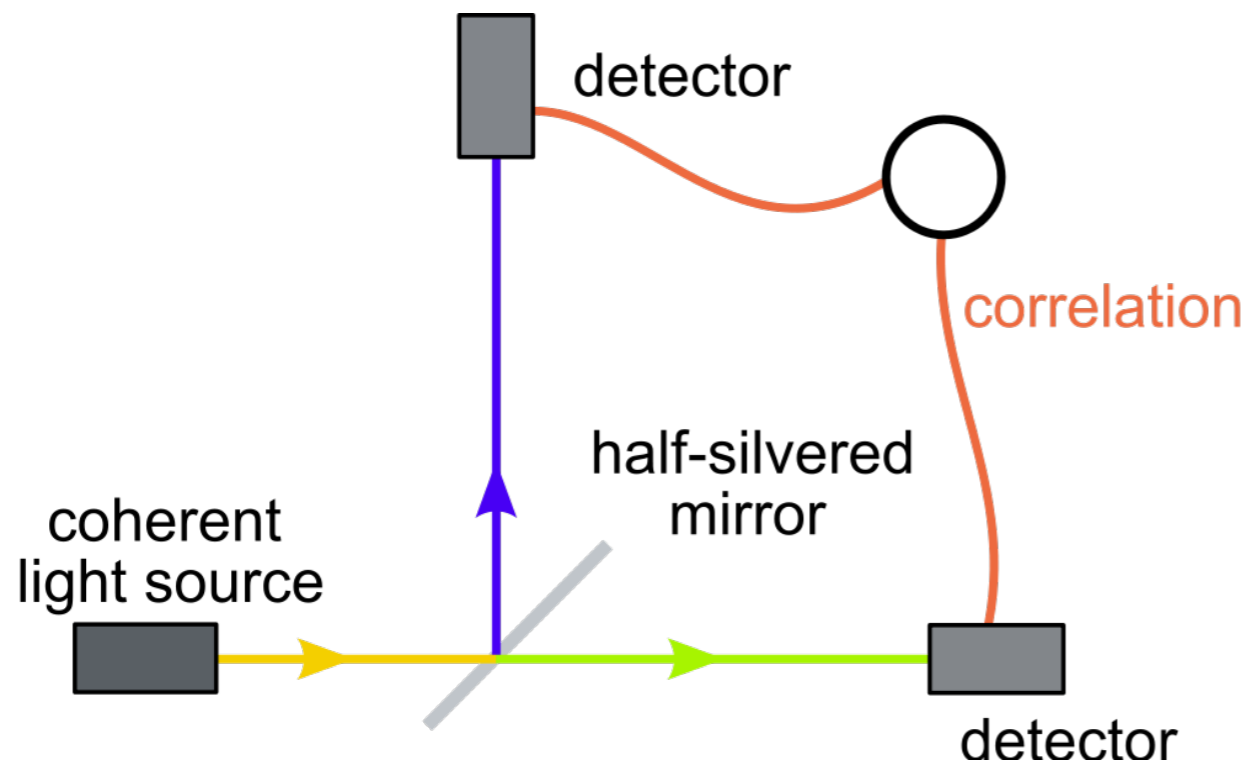

looking at plane waves with two detectors and phase difference ϕ

$$I_1 = E_1^2 \sin^2 \omega t \quad I_2 = E_1^2 \sin^2(\omega t + \phi)$$

intensity correlation

$$\langle I_1 I_2 \rangle = E^4 / 4 \left(1 + \cos^2 2\phi \right)$$